


LOW VOLTAGE OPERATION LOW OFFSET VOLTAGE DUAL C-MOS OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJU7094, 95 and 96 are single supply dual C-MOS operational amplifiers featuring a low operating voltage from 1V, low operating current of 15 μ A/circuit (7094 typ.), 80 μ A/circuit (7095 typ.), 200 μ A/circuit (7096 typ.) and low offset voltage 2mV (max.). They also have a low input bias current of 1pA (typ.) and input voltage range from ground, which can provide a ground sensing, and rail-to-rail output swing in both rails. The NJU7094, 7095 and 7096 are available in a wide variety of 8-lead packages, dual-in-line DIP8, surface-mount SOP8 (DMP8), SSOP8, MSOP8 (VSP8), MSOP8 (TVSP8). The combination of these features makes them ideal for a variety of portable devices.


■ PACKAGE OUTLINE



NJU709XD
(DIP8)



NJU709XM
(DMP8)



NJU709XV
(SSOP8)



NJU709XR
(MSOP8 (VSP8))




NJU709XRB1
(MSOP8 (TVSP8))

■ FEATURES

- Single-Power-Supply
- Low Offset Voltage ($V_{IO}=4\text{mV max}$)
- Wide Operating Voltage ($V_{DD}=1 \text{ to } 5.5\text{V}$)
- Wide Output Swing Range ($V_{OM}=2.9\text{V min. @ } 3.0\text{V}$)
- Low Operating Current
- Low Bias Current ($I_{IB}=1\text{pA typ.}$)
- Compensation Capacitor Incorporated
- Package Outline
DIP8, DMP8, SSOP8
MSOP8 (VSP8) MEET JEDEC MO-187-DA
MSOP8 (TVSP8) MEET JEDEC MO-187-DA/THIN TYPE

■ PIN CONFIGURATION

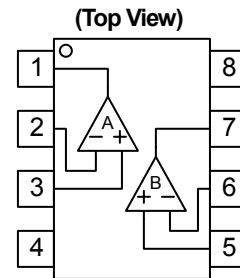

- 1: OUT 1
- 2: IN -1
- 3: IN +1
- 4: VSS
- 5: IN +2
- 6: IN -2
- 7: OUT 2
- 8: VDD


- C-MOS Technology

■ LINE-UP

($T_a=25^\circ\text{C}, V_{DD}=3.0\text{V}, \text{Per Circuit}$)

| PARAMETER | NJU7094 | NJU7095 | NJU7096 | UNIT |
|----------------------|---------|---------|---------|------------------------------|
| Operating Current | 15 | 80 | 200 | μA (typ) |
| Slew Rate | 0.1 | 1.0 | 2.4 | $\text{V}/\mu\text{s}$ (typ) |
| Unity Gain Bandwidth | 0.2 | 1.0 | 1.0 | MHz (typ) |

■ EQUIVALENT CIRCUIT

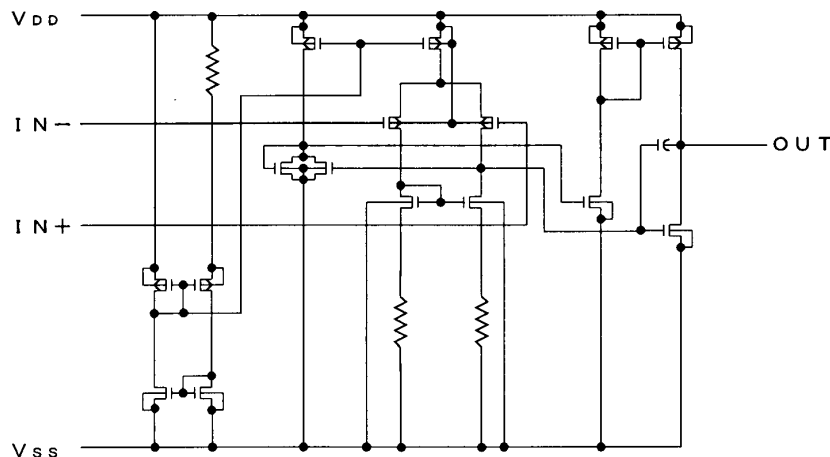

NJU7094/95/96

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|------------------|--|------|
| Supply Voltage | V _{DD} | 7 | V |
| Differential Input Voltage | V _{ID} | ± 7 (note1) | V |
| Common Mode Input Voltage | V _{IC} | -0.3~7 | V |
| Power Dissipation | P _D | (DIP8) 500 (DMP8) 300 (SSOP8) 250 (MSOP8 (VSP8)) 320 (MSOP8 (TVSP8)) 320 | mW |
| Operating Temperature Range | T _{opr} | -40~+85 | °C |
| Storage Temperature Range | T _{stg} | -55~+125 | °C |

(note1) If the supply voltage (V_{DD}) is less than 7V, the input voltage must not over the V_{DD} level though 7V is limit specified.

(note2) Decoupling capacitor should be connected between V_{DD} and V_{SS} for the stable operation.

■ ELECTRICAL CHARACTERISTICS

NJU7094

(Ta=25°C, V_{DD}=3.0V, R_L=∞)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|------------------|--|----------------------|------|----------------------|------|
| Input Offset Voltage | V _{IO} | V _{IN} =1/2V _{DD} | - | - | 4 | mV |
| Input Offset Current | I _{IO} | | - | 1 | - | pA |
| Input Bias Current | I _{IB} | | - | 1 | - | pA |
| Input Impedance | R _{IN} | | - | 1 | - | TΩ |
| Large Signal Voltage Gain | A _{VD} | | 60 | 70 | - | dB |
| Input Common Mode Voltage Range | V _{ICM} | | 0~2.5 | - | - | V |
| Maximum Output Swing Voltage | V _{OM1} | R _L =1MΩ | V _{DD} -0.1 | - | - | V |
| | V _{OM2} | R _L =1MΩ | - | - | V _{SS} +0.1 | V |
| Common Mode Rejection Ratio | CMR | V _{IN} =1/2V _{DD} | 55 | 65 | - | dB |
| Supply Voltage Rejection Ratio | SVR | V _{DD} =1.5~5.5V | 60 | 70 | - | dB |
| Operating Current | I _{DD} | Per Circuit | - | 15 | 25 | μA |
| Slew Rate | SR | | - | 0.1 | - | V/μs |
| Unity Gain Bandwidth | F _t | A _v =40dB, C _L =10pF | - | 0.2 | - | MHz |

(note3) The source current is less than 2.9μA (at V_{OM}/R_L=2.9V/1MΩ).

NJU7095

(Ta=25°C, V_{DD}=3.0V, R_L=∞)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|------------------|--|----------------------|------|----------------------|------|
| Input Offset Voltage | V _{IO} | V _{IN} =1/2V _{DD} | - | - | 4 | mV |
| Input Offset Current | I _{IO} | | - | 1 | - | pA |
| Input Bias Current | I _{IB} | | - | 1 | - | pA |
| Input Impedance | R _{IN} | | - | 1 | - | TΩ |
| Large Signal Voltage Gain | A _{VD} | | 60 | 70 | - | dB |
| Input Common Mode Voltage Range | V _{ICM} | | 0~2.5 | - | - | V |
| Maximum Output Swing Voltage | V _{OM1} | R _L =100kΩ | V _{DD} -0.1 | - | - | V |
| | V _{OM2} | R _L =100kΩ | - | - | V _{SS} +0.1 | V |
| Common Mode Rejection Ratio | CMR | V _{IN} =1/2V _{DD} | 55 | 65 | - | dB |
| Supply Voltage Rejection Ratio | SVR | V _{DD} =1.5~5.5V | 60 | 70 | - | dB |
| Operating Current | I _{DD} | Per Circuit | - | 80 | 160 | μA |
| Slew Rate | SR | | - | 1.0 | - | V/μs |
| Unity Gain Bandwidth | F _t | A _V =40dB, C _L =10pF | - | 1.0 | - | MHz |

(note4) The source current is less than 29μA (at V_{OM}/R_L=2.9V/100kΩ).

NJU7096

(Ta=25°C, V_{DD}=3.0V, R_L=∞)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|------------------|--|----------------------|------|----------------------|------|
| Input Offset Voltage | V _{IO} | V _{IN} =1/2V _{DD} | - | - | 4 | mV |
| Input Offset Current | I _{IO} | | - | 1 | - | pA |
| Input Bias Current | I _{IB} | | - | 1 | - | pA |
| Input Impedance | R _{IN} | | - | 1 | - | TΩ |
| Large Signal Voltage Gain | A _{VD} | | 60 | 70 | - | dB |
| Input Common Mode Voltage Range | V _{ICM} | | 0~2.5 | - | - | V |
| Maximum Output Swing Voltage | V _{OM1} | R _L =50kΩ | V _{DD} -0.1 | - | - | V |
| | V _{OM2} | R _L =50kΩ | - | - | V _{SS} +0.1 | V |
| Common Mode Rejection Ratio | CMR | V _{IN} =1/2V _{DD} | 55 | 65 | - | dB |
| Supply Voltage Rejection Ratio | SVR | V _{DD} =1.5~5.5V | 60 | 70 | - | dB |
| Operating Current | I _{DD} | Per Circuit | - | 200 | 400 | μA |
| Slew Rate | SR | | - | 2.4 | - | V/μs |
| Unity Gain Bandwidth | F _t | A _V =40dB, C _L =10pF | - | 1.0 | - | MHz |


(note5) The source current is less than 58μA (at V_{OM}/R_L=2.9V/50kΩ).

NJU7094/95/96


■ TYPICAL CHARACTERISTICS

(1) NJU7094

Output Voltage vs. Output Current (SOURCE)

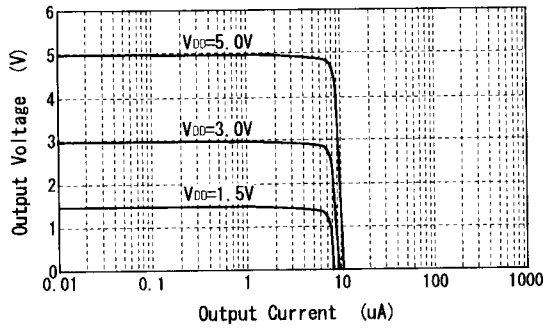


Output Voltage vs. Output Current (SINK)

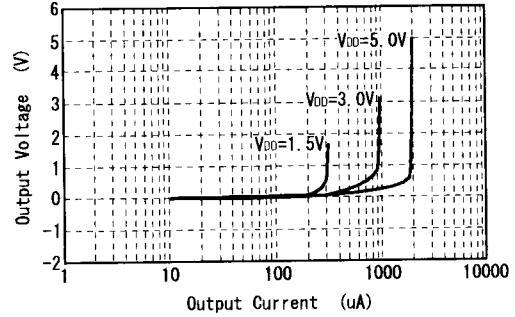


Offset Voltage vs. Operating Voltage

V_{IN}=0.1V

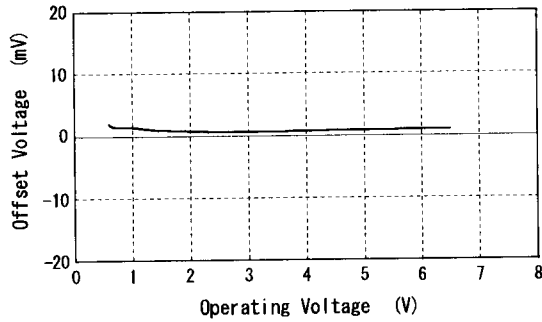


Offset Voltage vs. Input Voltage

V_{DD}=3.0V

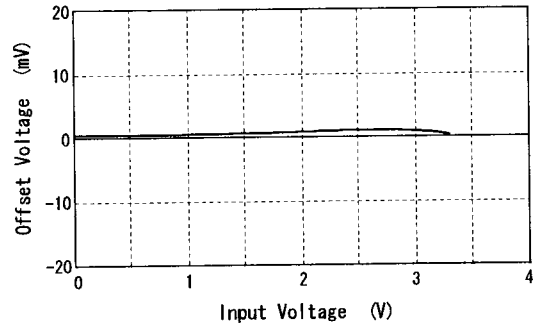


Operating Current vs. Operating Voltage

V_{IN}=0.1V

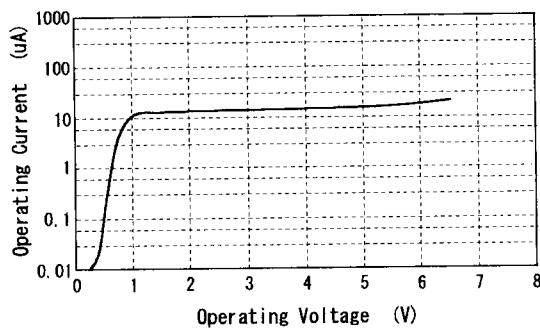


Output Current vs. Operating Voltage


V_{IN}=0.1V

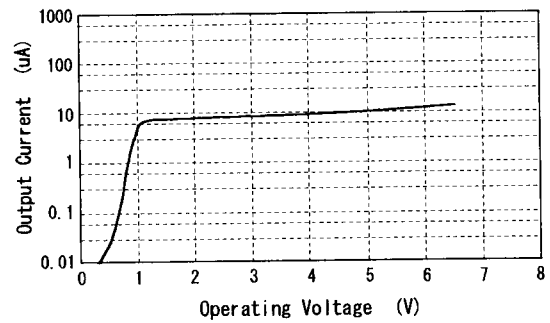


Maximum Output Swing Voltage vs. Load Resistance

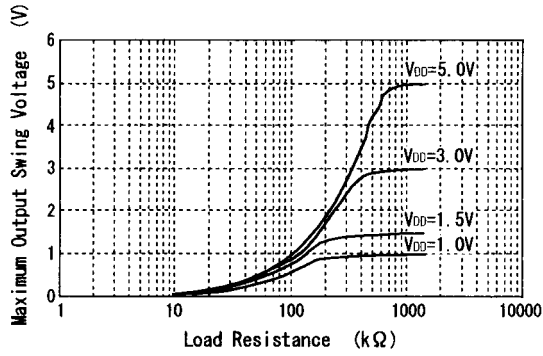

Maximum Output Swing Voltage vs. Frequency

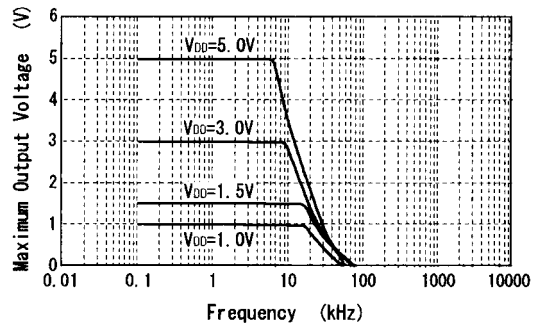


Voltage Gain-Phase vs. Frequency

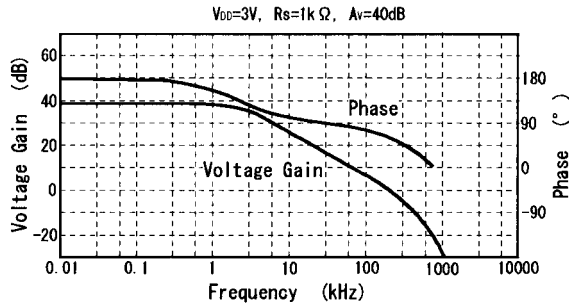


(2) NJU7095

Output Voltage vs. Output Current (SOURCE)

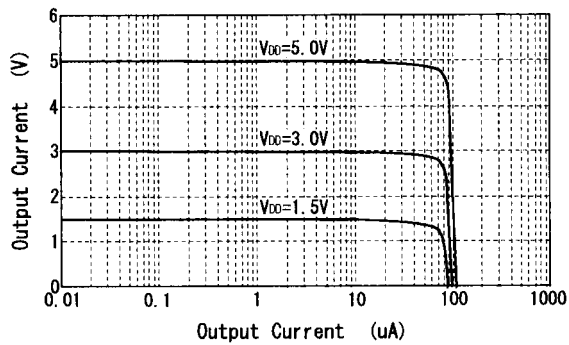


Output Voltage vs. Output Current (SINK)

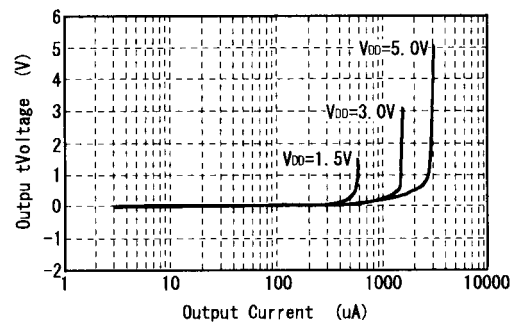


Offset Voltage vs. Operating Voltage

V_{IN}=0.1V

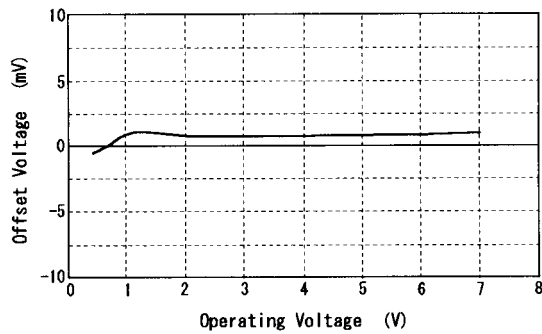


Offset Voltage vs. Input Voltage

V_{DD}=3.0V

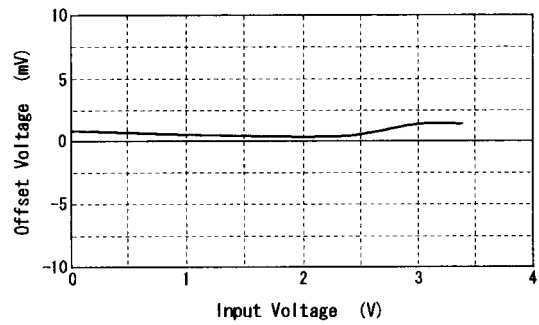


Operating Current vs. Operating Voltage




V_{IN}=0.1V

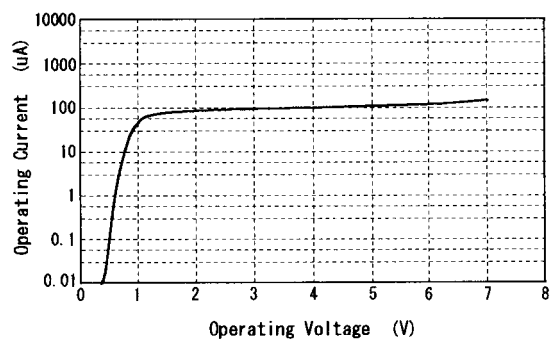

Output Current vs. Operating Voltage


V_{IN}=0.1V

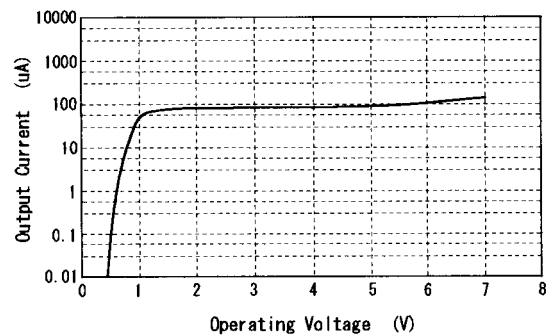

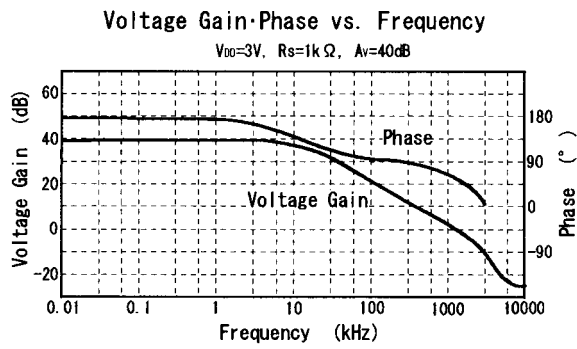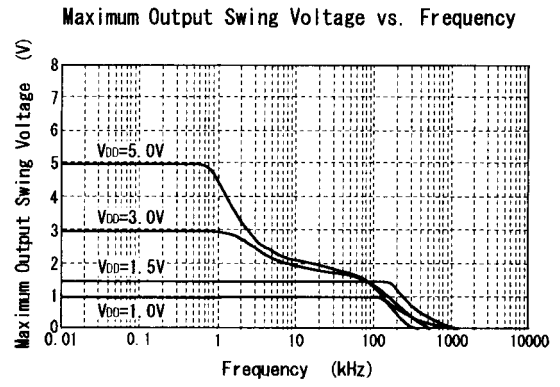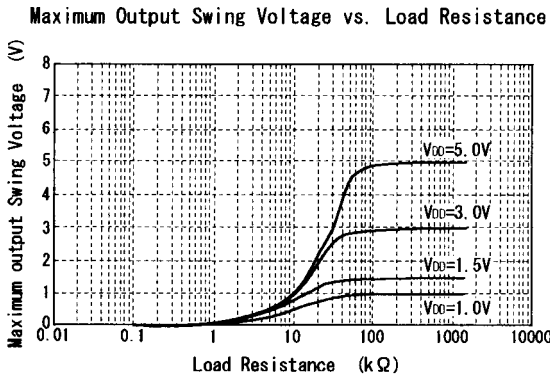


(3) NJU7096

Output Voltage vs. Output Current (SOURCE)

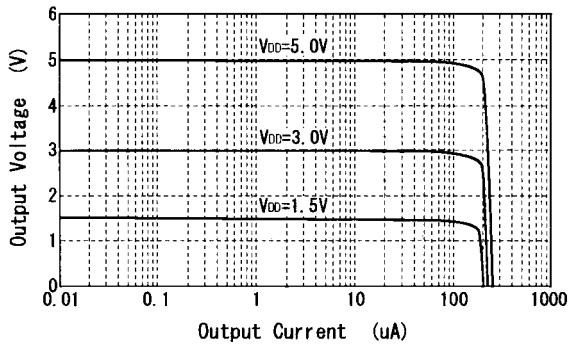


Output Voltage vs. Output Current (SINK)

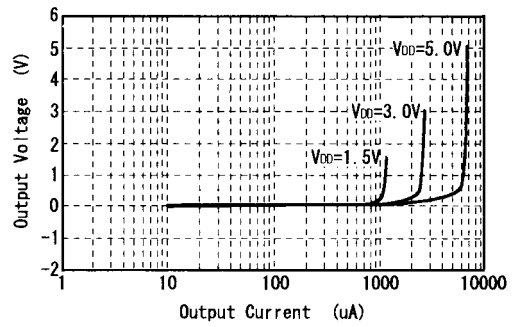


Offset Voltage vs. Operating Voltage

V_{IN}=0.1V

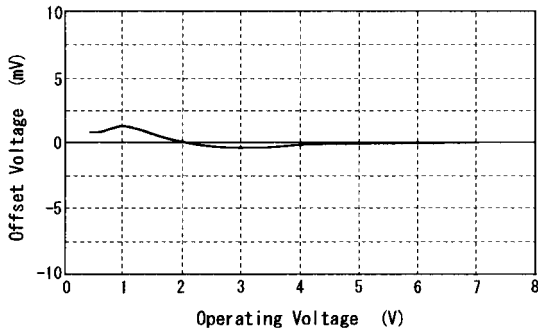


Offset Voltage vs. Input Voltage

V_{DD}=3.0V

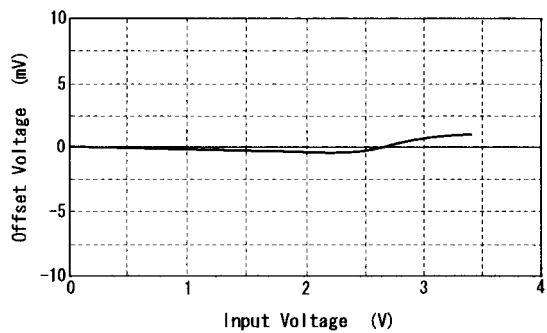


Operating Current vs. Operating Voltage

V_{IN}=0.1V

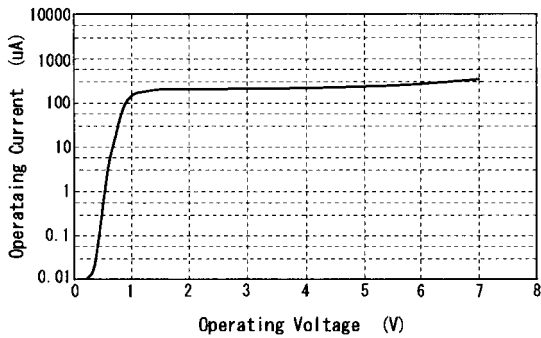


Output Current vs. Operating Voltage


V_{IN}=0.1V

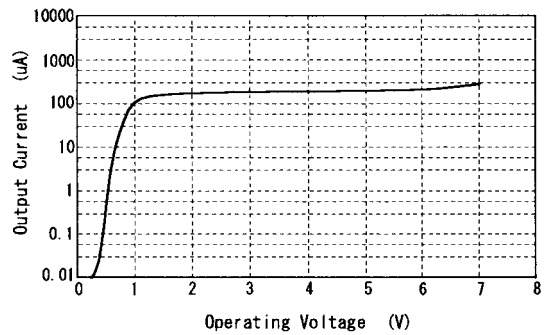


Maximum Output Swing Voltage vs. Load Resistance

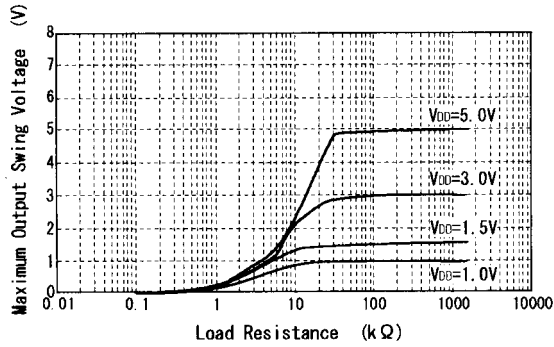

Maximum Output Swing Voltage vs. Frequency

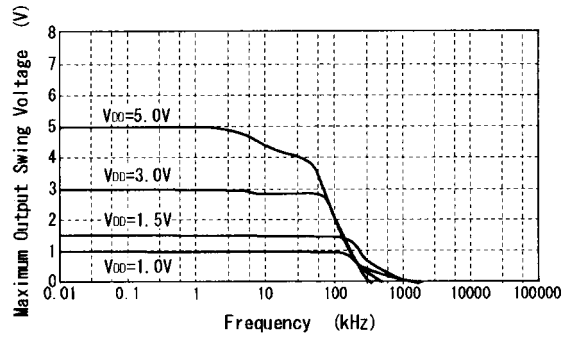

Voltage Gain-Phase vs. Frequency

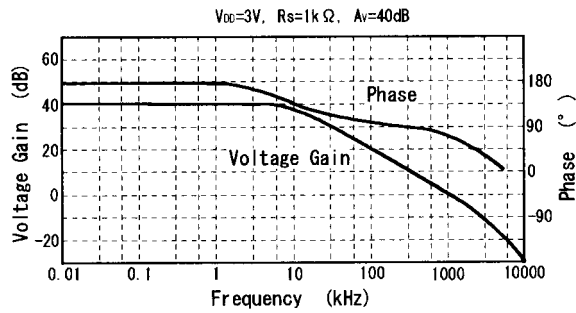

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.