



NPN/PNP SILICON COMPLEMENTARY SMALL SIGNAL DUAL TRANSISTOR

Qualified per MIL-PRF-19500/421

Qualified Levels:
JAN, JANTX, and
JANTXV


DESCRIPTION

This 2N3838 device in a 6-pin Flatpack package is military qualified up to a JANTXV level for high-reliability applications. Microsemi also offers numerous other products to meet higher and lower power voltage regulation applications.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- JAN, JANTX, and JANTXV qualifications also available per MIL-PRF-19500/421.
- RoHS compliant versions available (commercial grade only).

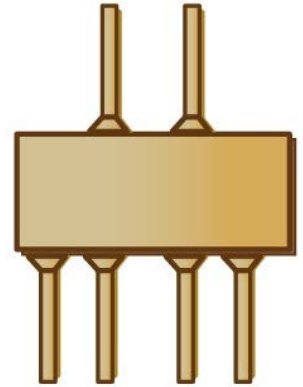


**6-Pin Flatpack
Package**

APPLICATIONS / BENEFITS

- Two complementary small signal silicon transistors in a single package design.
- Lightweight.

Also available in:

 **TO-78 package**
(leaded)
[2N4854](#)

 **6-Pin U package**
(surface mount)
[2N4854U](#)

MAXIMUM RATINGS

Parameters/Test Conditions	Symbol	Value per		Unit
		Each Transistor	Total Package	
Thermal Resistance Junction-to-Case	R _{θJC}	250	125	°C/W
Thermal Resistance Junction-to-Ambient	R _{θJA}	350	290	°C/W
Total Power Dissipation @ T _A = +25 °C ⁽¹⁾	P _T	0.25	0.35	W
Total Power Dissipation @ T _C = +25 °C ⁽²⁾	P _T	0.7	1.4	W
Junction and Storage Temperature	T _J and T _{STG}	-65 to +200		°C
Collector-Base Voltage, Emitter Open	V _{CB0}	60		V
Emitter-Base Voltage, Collector Open	V _{EB0}	5		V
Collector-Emitter Voltage, Base Open	V _{CEO}	40		V
Collector Current, dc	I _C	600		mA
Lead to Case Voltage		+/- 120		V
Solder Temperature @ 10 s	T _{SP}	260		°C

Notes: 1. For T_A > +25 °C, derate linearly 1.43 mW/°C one transistor, 2.00 mW/°C both transistors.
2. For T_C > +25 °C, derate linearly 4.0 mW/°C one transistor, 8.0 mW/°C both transistors.

MSC – Lawrence
6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland
Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:
www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Hermetic ceramic (white), Au over Ni plated kovar cover.
- TERMINALS: Au over Ni plated copper.
- MARKING: Manufacturer's ID, part number, date code, Pin 1 Identifier.
- POLARITY: See Case Outline.
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE


SYMBOLS & DEFINITIONS

Symbol	Definition
I_B	Base Current, dc.
I_C	Collector Current, dc.
I_E	Emitter Current, dc.
I_o	Average Rectified Output Current: The Output Current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
V_{CB}	Collector-Base Voltage (dc).
V_{CE}	Collector-Emitter Voltage, dc.
V_{EB}	Emitter-Base Voltage (dc).

ELECTRICAL CHARACTERISTICS @ $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted.

Characteristics	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Current $I_C = 10\text{ mA}$ (pulsed)	$V_{(BR)CEO}$	40		V
Collector-Base Cutoff Current $V_{EB} = 5\text{ V}$	$I_{CBO(1)}$		10	μA
Collector-Base Cutoff Current $V_{CB} = 50\text{ V}$	$I_{CBO(2)}$		50	nA
Emitter-Base Cutoff Current $V_{EB} = 5.0\text{ V}$ $V_{EB} = 3.0\text{ V}$	$I_{EBO(1)}$ $I_{EBO(2)}$		10 10	μA nA
ON CHARACTERISTICS				
Forward-Current Transfer Ratio $I_C = 150\text{ mA}$, $V_{CE} = 1\text{ V}$ $I_C = 100\text{ }\mu\text{A}$, $V_{CE} = 10\text{ V}$ $I_C = 1.0\text{ mA}$, $V_{CE} = 10\text{ V}$ $I_C = 10\text{ mA}$, $V_{CE} = 10\text{ V}$ $I_C = 150\text{ mA}$, $V_{CE} = 10\text{ V}$ $I_C = 300\text{ mA}$, $V_{CE} = 10\text{ V}$	h_{FE}	50 35 50 75 100 35	300	
Collector-Emitter Saturation Voltage $I_C = 150\text{ mA}$, $I_B = 15\text{ mA}$	$V_{CE(sat)}$		0.40	V
Base-Emitter Saturation Voltage $I_C = 150\text{ mA}$, $I_B = 15\text{ mA}$	$V_{BE(sat)}$	0.80	1.25	V
DYNAMIC CHARACTERISTICS				
Forward Current Transfer Ratio $I_C = 1.0\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ kHz}$	h_{fe}	60	300	
Forward Current Transfer Ratio, Magnitude $I_C = 20\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 100\text{ MHz}$	$ h_{fe} $	2.0	10	
Small-Signal Common Emitter Input Impedance $I_C = 1.0\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ kHz}$	h_{ie}	1.5	9.0	k Ω
Small-Signal Common Emitter Output Admittance $I_C = 1.0\text{ mA}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ kHz}$	h_{oe}		50	μhmo
Open Circuit Output Capacitance $V_{CB} = 10\text{ V}$, $I_E = 0$, $100\text{ kHz} \leq f \leq 1.0\text{ MHz}$	Cobo		8.0	pF
Noise Figure $I_C = 100\text{ }\mu\text{A}$, $V_{CE} = 10\text{ V}$, $f = 1.0\text{ kHz}$, $R_G = 1.0\text{ k}\Omega$	NF		8.0	dB
SWITCHING CHARACTERISTICS				
Turn-On Time (Saturated) (Reference MIL-PRF-19500/421, figure 7)	t_{on}		45	ns
Turn-Off Time (Saturated) (Reference MIL-PRF-19500/421, figure 8)	t_{off}		300	ns
Pulse Response (Non-Saturated) (Reference MIL-PRF-19500/421, figure 9)	$t_{on} + t_{off}$		18	ns
Collector-Emitter Non-Latching Voltage	V_{CEO}	40		V

PACKAGE DIMENSIONS

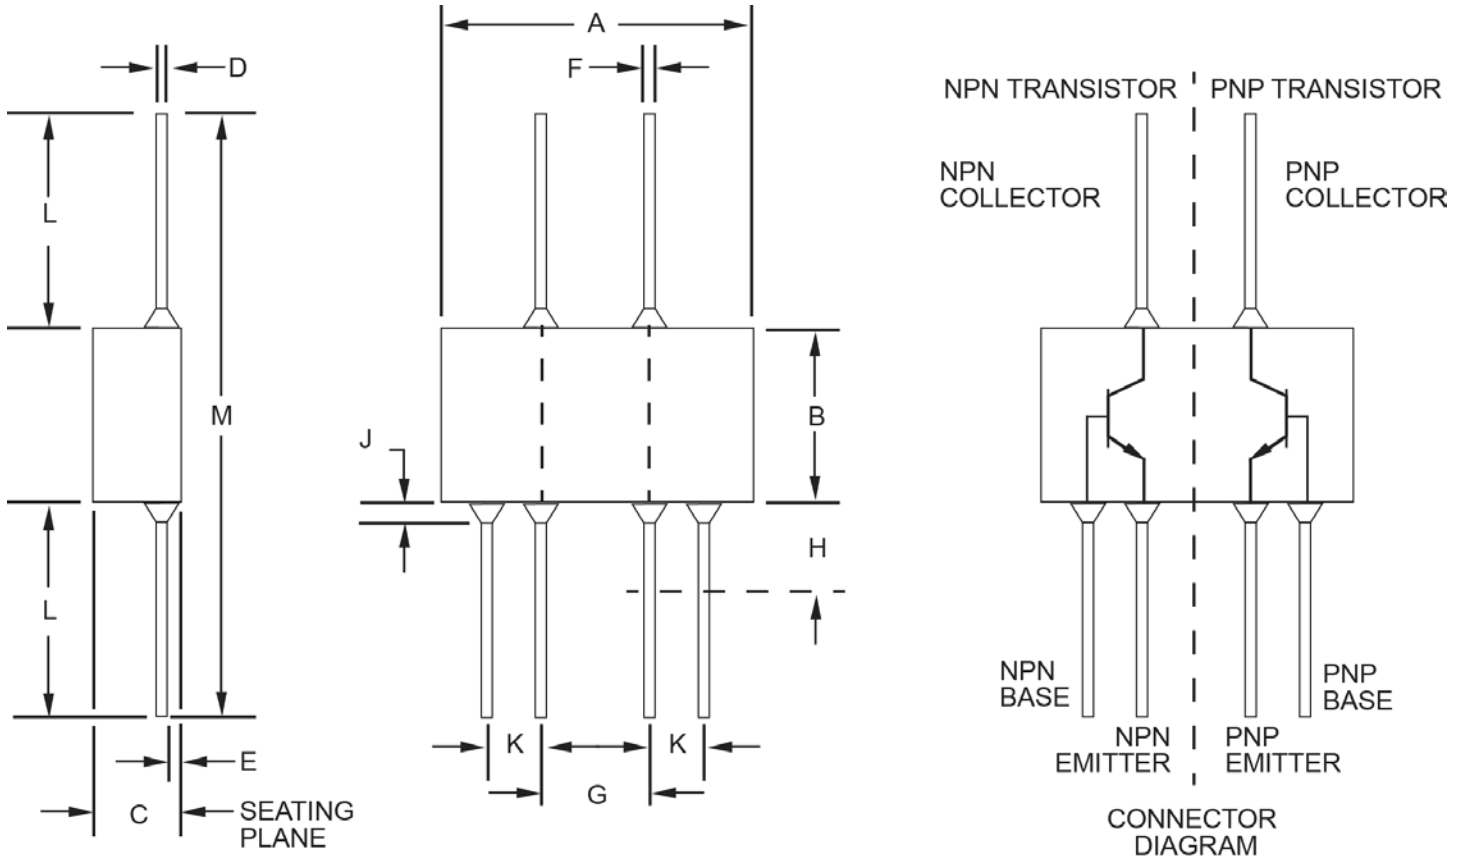

Ltr	Dimensions				Notes
	Inch		Millimeters		
	Min	Max	Min	Max	
A	.240	.290	6.10	7.37	
B	.115	.160	2.92	4.06	
C	.030	.080	0.76	2.03	
D	.003	.006	0.08	0.15	4
E	.005	.035	0.13	0.89	
F	.010	.019	0.25	0.48	4, 6

Ltr	Dimension				Notes
	Inch		Millimeters		
	Min	Max	Min	Max	
G	.100 TP		2.54 TP		6,7
H	-	.050	-	1.27	
J	-	.015	-	0.38	5
K	.050 TP		1.27 TP		6,7
L	.070	.250	1.78	6.35	3,4
M	.260	.650	6.60	16.51	

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Maximum limit of this dimension does not apply to device supplied in a carrier.
4. All six leads.
5. Lead dimensions are uncontrolled in this zone.
6. Dimensions "F", "G", and "K" to be measured in zone "H".
7. Leads within .005 inch (0.13 mm) total of true position (TP) at "H" with maximum material condition.
8. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[2N3838](#) [2N3838/TR](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.