

SJDE-□ANA-OY

Junma ML-II servo drive

**A new concept in drive simplicity
Save space, save wiring, save time**

- Ultra compact drive size reduces panel space
- Tuning-less technology, no gain parameters need to be set
- Peak torque 300% of nominal for 3 seconds
- High response, high speed, high torque and high accuracy
- Drive version with MECHATROLINK-II port built-in
- MECHATROLINK-II simplifies wiring and reduces installation time
- MECHATROLINK-II provides access to the system from one point


Ratings

- 230 VAC Single-phase 100 W to 750 W (2.39 Nm)



System Configuration


Junma MECHATROLINK-II Servo Drive Configuration

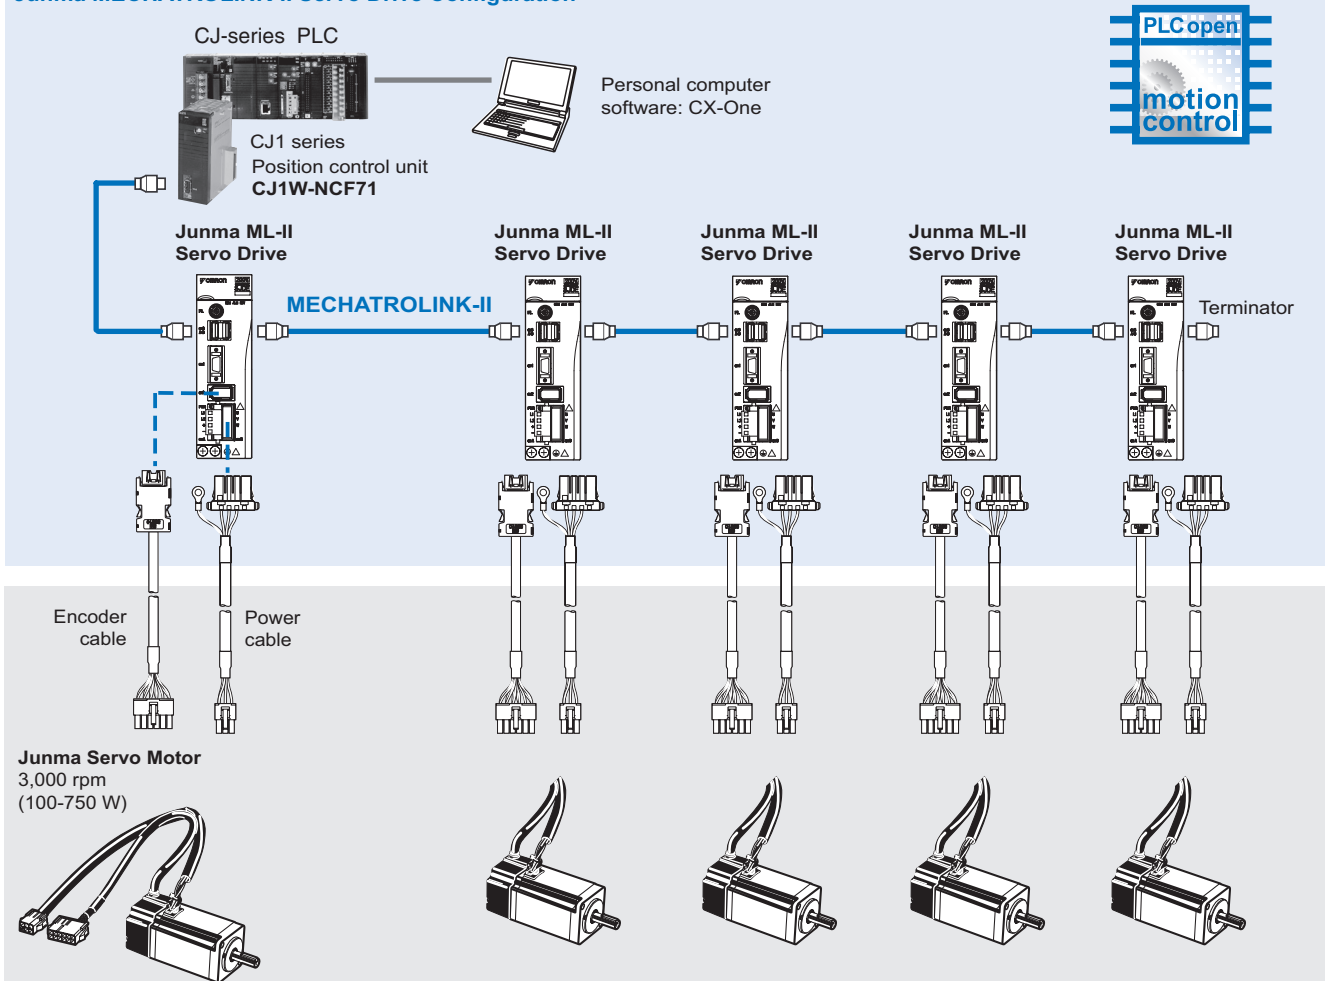

Servomotor / Servo Drive Combination

Junma Servomotor					Junma servo drive	
	Voltage	Rated Torque	Capacity	Model without brake	Model with brake	MECHATROLINK-II
	200 V	0.318 Nm	100 W	SJME-01AMB41-OY	SJME-01AMB4C-OY	SJDE-01ANA-OY
		0.637 Nm	200 W	SJME-02AMB41-OY	SJME-02AMB4C-OY	SJDE-02ANA-OY
		1.27 Nm	400 W	SJME-04AMB41-OY	SJME-04AMB4C-OY	SJDE-04ANA-OY
		2.39 Nm	750 W	SJME-08AMB41-OY	SJME-08AMB4C-OY	SJDE-08ANA-OY

Servo Drive Type Designation

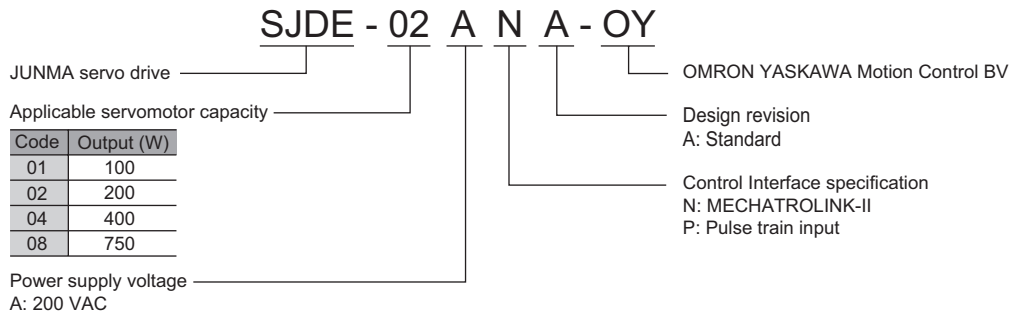

Servo Drive Specifications

Junma MECHATROLINK-II Servo Drive


Servo Drive Type		SJDE- □	01ANA-OY		02ANA-OY		04ANA-OY		08ANA-OY		
Applicable servomotor		SJME-□	01A□		02A□		04A□		08A□		
Basic specifications	Max. Applicable Motor capacity	W	100		200		400		750		
	Continuous output current	Arms	0.84		1.1		2.0		3.7		
	Max. output current	Arms	2.5		3.3		6.0		11.1		
	Input power supply (Main circuit and control circuit)	Voltage	Single-phase, 200 to 230 VAC, + 10 to -15% (50/60 Hz)								
		Capacity KVA	0.40		0.75		1.2		2.2		
	Control Method		PWM control, sine wave current drive system								
	Feedback		Analogue incremental encoder (13 bits incremental equivalent)								
	Allowable load inertia ^{*1}	kg·m ²	0.6 × 10 ⁻⁴		3.0 × 10 ⁻⁴		5.0 × 10 ⁻⁴		10.0 × 10 ⁻⁴		
	Usage / storage temperature		0 to +55° C / -20 to 70° C								
	Usage / storage humidity		90%RH or less (non-condensing)								
Altitude		1000m or less above sea level									
Vibration/shock Resistance		4.9m/s ² (0.5G) / 19.6m/s ² (2G)									
Configuration		Base mounted									
Approx. mass	Kg	1.0						1.4			
Built-in functions	Dynamic brake (DB)		Operated at main power OFF, servo alarm, servo OFF.(OFF after motor stops; ON when motor power is off.)								
	Regenerative processing		Optional (If the regenerated energy is too large, install a regenerative unit JUSP-RG08D)								
	Over-travel (OT) prevention function		P_OT, N_OT								
	Emergency stop		Emergency stop (E-STP)								
	LED display		4 LEDs (PWR, RDY, COM, ALM)								
	MECHATROLINK-II monitor		MECHATROLINK-II under communication : COM LED (Light ON)								
	Servo ON/OFF monitor		At Servo OFF : RDY LED (Light OFF), at Servo ON : RDY LED (Light Blinks)								
	Power supply status monitor		Control / main-circuit power-supply OFF state: PWR LED (Light OFF) Control / main-circuit power-supply ON state: PWR LED (Light ON)								
	Electronic gearing		0.01< A/B<100								
	Protection		Overcurrent, overvoltage, undervoltage, overload, main circuit sensor error, board temperature error, excessive position error overflow, overspeed, encoder signal error, overrun protection, system error, parameter error								
	MECHATROLINK Communication	Comm. protocol	MECHATROLINK-II								
		Transmission rate	10 Mbps								
		Transmission cycle	1ms, 1.5ms, 2ms, 3ms, 4ms								
		Data length	17 byte and 32 byte								
	Command input	MECHATROLINK communication	MECHATROLINK-II commands (For sequence, motion, data setting/reference, monitor, adjustment, and other commands)								
	Sequence Input signal	Fixed input	5 points (fixed layout: external latch signal, zero return reduced speed signal, forward drive inhibiting signal, reverse run inhibiting signal, emergency stop signal)								
	Sequence Output signal	Fixed output	2 points (fixed layout: servo alarm, brake interlock)								

Note: *1. Value without external regeneration unit


Dimensions

Junma MECHATROLINK-II servo drives

SJDE-01, 02, 04ANA-OY (200V, 100 to 400W)

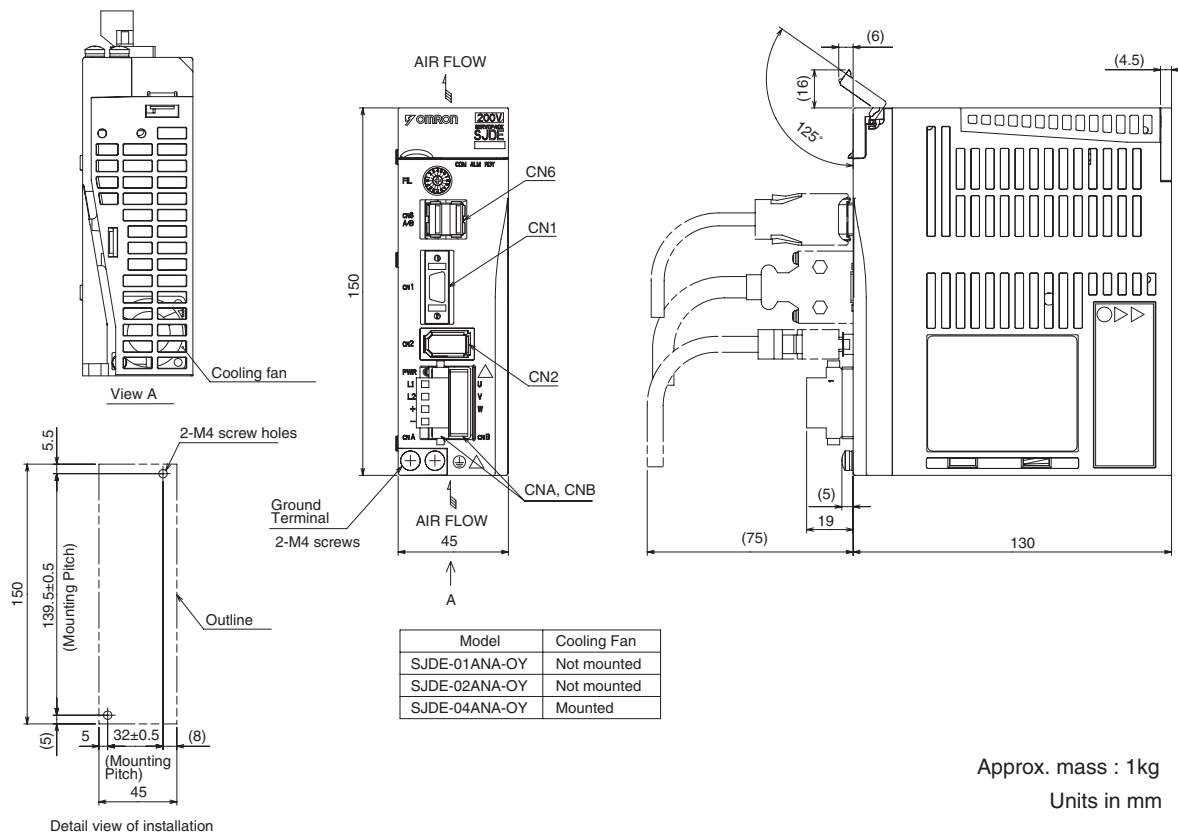


SJDE-08ANA-OY (200V, 750W)

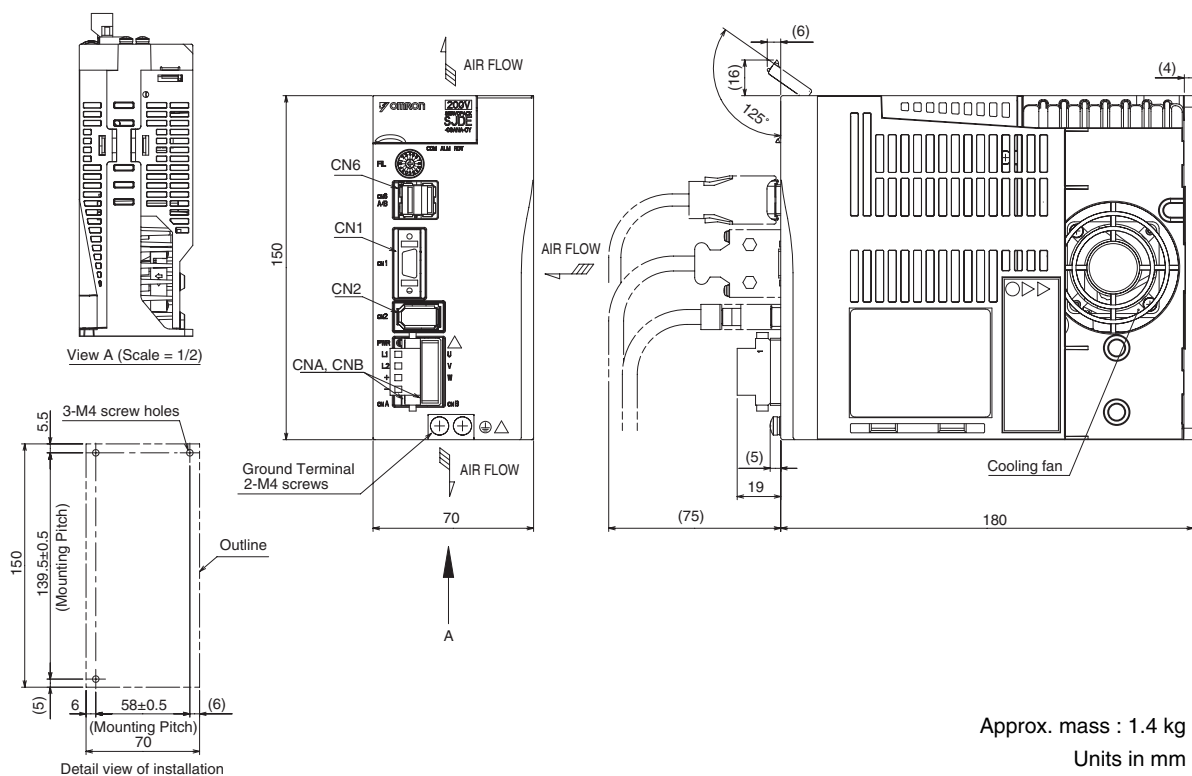

Ordering Information

Junma MECHATROLINK-II Servo Drive Configuration

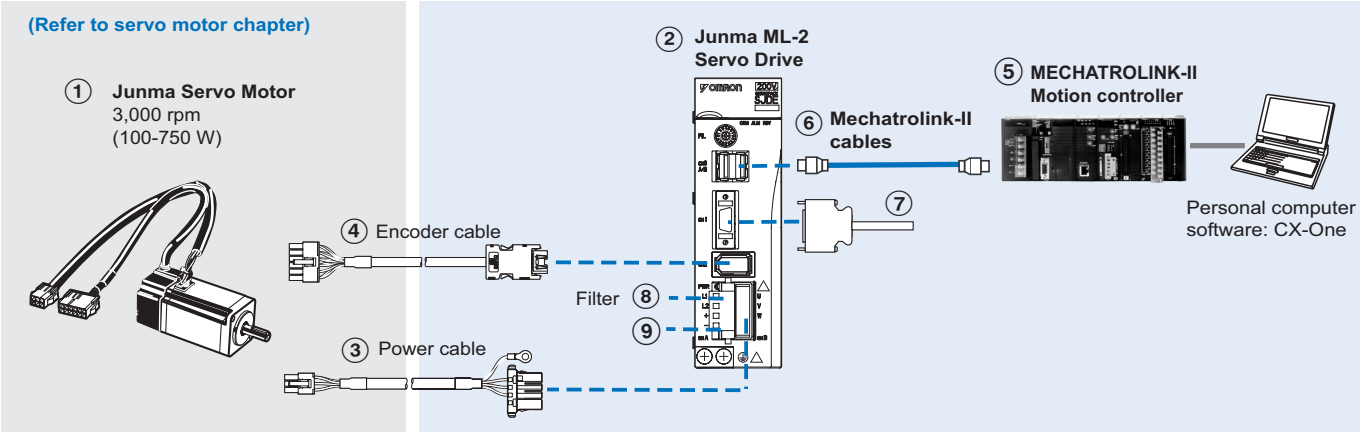

Servomotors and Servo drives

Symbol	Specifications					① Servomotor model	② Servo drive model
	Voltage	Encoder and Design		Rated Torque	Capacity		
①②	1 Phase 200 VAC	Analogue Incremental Encoder	Without brake	0.318 Nm	100 W	SJME-01AMB41-OY	SJDE-01ANA-OY
				0.637 Nm	200 W	SJME-02AMB41-OY	SJDE-02ANA-OY
				1.27 Nm	400 W	SJME-04AMB41-OY	SJDE-04ANA-OY
				2.39 Nm	750 W	SJME-08AMB41-OY	SJDE-08ANA-OY
		Straight shaft with key	With brake	0.318 Nm	100 W	SJME-01AMB4C-OY	SJDE-01ANA-OY
				0.637 Nm	200 W	SJME-02AMB4C-OY	SJDE-02ANA-OY
				1.27 Nm	400 W	SJME-04AMB4C-OY	SJDE-04ANA-OY
				2.39 Nm	750 W	SJME-08AMB4C-OY	SJDE-08ANA-OY

Power and encoder cables

Note: ③④ Refer to the Junma servo motor section for motor cables or connectors selection

MECHATROLINK-II Motion controllers

Symbol	Name	Model
⑤	Position Controller Unit for CJ1 PLC	CJ1W-NCF71
	Position Controller Unit for CS1 PLC	CS1W-NCF71
	Trajexia stand-alone motion controller, 16 axes	TJ1-MC16
	Trajexia stand-alone motion controller, 4 axes	TJ1-MC04

MECHATROLINK-II cables

Symbol	Specifications		Model
⑥	MECHATROLINK-II Terminator resistor		JEPMC-W6022
	MECHATROLINK-II Cables	0.5 m	JEPMC-W6003-A5
		1 m	JEPMC-W6003-01
		3 m	JEPMC-W6003-03
		5 m	JEPMC-W6003-05
		10 m	JEPMC-W6003-10
		20 m	JEPMC-W6003-20
		30 m	JEPMC-W6003-30

Cables for I/Os (for CN1)

Symbol	Name	Compatible units	Model
⑦	Control cable	Cable for servo drive I/O signals	1 m R7A-CPZ001S or JZSP-CHI003-01
			2 m R7A-CPZ002S or JZSP-CHI003-02
			3 m JZSP-CHI003-03

Filters

Symbol	Applicable servo drive	Rated current	Leakage current	Rated voltage	Filter model
⑧	SJDE-01ANA-OY	5A	1.7 mA	250 VAC 1- phase	R7A-FIZN105-BE
	SJDE-02ANA-OY				
	SJDE-04ANA-OY				
	SJDE-08ANA-OY	9A	1.7 mA		R7A-FIZN109-BE

Regenerative Unit Model (Option)

Symbol	Specifications	Model (Omron)	Model (Yaskawa)
⑨	External regenerative unit (Optional)	R88A-RG08UA	JUSP-RG08D

Connectors

Specification	Model (Omron)	Model (Yaskawa)
Control I/O connector (for CN1)	R7A-CNA01R	JZSP-CHI9-1
Power input connector (for CNB). (Included in drive the box)	R7A-CNZ01P	JZSP-CHG9-1

Computer Software

Specifications	Model
Configuration and monitoring software tool via ML2 (CX-Drive version 1.3 or higher)	CX-DRIVE
Complete Omron software package including CX-Drive (CX-One 2.0 or higher)	CX-ONE

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.