

LDB120 Series

120W Basic DIN Rail Power Supply Battery Charger / DC UPS Module

LDB120 Series is a single phase 120 W integrated DIN Rail Battery Charger / DC UPS Power Supplies, suitable for wide variety of industrial applications.

In case of mains or unit failure the DC UPS function enables the power supply to feed the load from the battery without any interruption, until the mains is recovered or the battery reaches the “Deep Discharge Voltage” threshold.

These units have received excellent market approval for their high efficiency, excellent reliability and compactness. Simple but elegant look and easy installation make them market leaders for various industrial applications.

LDB120 Series are isolation devices suitable for SELV and PELV circuitry and are designed to be mounted on DIN rail and installed inside a protective enclosure.



Key Features & Benefits

- Input: 120 - 240 VAC
- Output: 12 or 24 VDC model dependent
- To be used with Lead Acid batteries or lithium batteries (compatible with Lead Acid batteries)
- Efficiency up to 86%
- Economic solution for general purpose applications
- Instantaneous LOAD switch BACKUP mode



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

MODEL	INPUT VOLTAGE	# of PHASES	OUTPUT VOLTAGE	OUTPUT CURRENT
LDB120-12	120 - 240 VAC (140 - 345 VDC)	1	12 VDC	7 A
LDB120-24	120 - 240 VAC (140 - 345 VDC)	1	24 VDC	5 A

2. INPUT SPECIFICATIONS

Technical parameters are typical, measured in laboratory environment at 25°C and 240 VAC / 50 Hz, at nominal values, after minimum 5 minutes of operation.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input AC Voltage Range	Rated Operating	120 - 240 VAC 100 - 264 VAC
Input DC Voltage Range	Rated	140 - 345 VDC
Input Frequency		47 - 63 Hz
Input AC Current	Vin = 120 VAC Vin = 240 VAC	2.0 A 1.1 A
Input DC Current	Vin = 140 VDC Vin = 345 VDC	1.0 A 0.5 A
Inrush Peak Current		≤ 40 A
Touch (Leakage) Current		≤ 0.6 mA
Internal Protection Fuse	Not user replaceable	Fuse 3.15 AT
Recommended External Protection	It is strongly recommended to provide external surge arresters (SPD) according to local regulations	Fuse 4 AT or MCB 4 A C curve

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Power		120 W
Rated Voltage (Adjustable Voltage Range)	LDB120-12 (to be set at 14 VDC for battery charging) LDB120-24 (to be set at 27 VDC for battery charging)	12 VDC (12 – 15 VDC) 24 VDC (23 – 28 VDC)
Continuous Current	LDB120-12 LDB120-24	7 A 5 A
Overload Limit	LDB120-12 LDB120-24	11.5 A 6.5 A
Short Circuit Peak Current	LDB120-12 LDB120-24	> 20 A / 40 ms > 16 A / 80 ms
Load Regulation		≤ 1%
Ripple & Noise ¹		≤ 100 mVpp
Hold up Time	LDB120-12 LDB120-24	Vin = 120 VAC ≥ 10 ms Vin = 240 VAC ≥ 80 ms Vin = 120 VAC ≥ 10 ms Vin = 240 VAC ≥ 55 ms
Protections	Overload/short circuit: Hiccup mode Thermal protection Output overvoltage	
Output Overvoltage Protection (Active)	LDB120-12 LDB120-24	≥ 18 VDC ≥ 33 VDC
Battery Protections	Against short-circuit with resettable fuse (9 A) Against reverse polarity connection Against deep discharge	
Deep Discharge Cut-Off Voltage	LDB120-12 LDB120-24	9 VDC ± 0.5 V 18 VDC ± 0.5 V
Status Signals	LOAD ON PSU - green LED LOAD ON BATTERY - amber LED Dry contact (SPDT, 24 VDC / 1 A)	

Parallel Connection	Not Recommended	
Efficiency	LDB120-12	> 83.5%
	LDB120-24	> 86%
Dissipated Power	LDB120-12	< 21 W
	LDB120-24	< 20 W
Battery Information		
Rated Voltage	LDB120-12	12 - 14.4 VDC
	LDB120-24	24 - 28.8 VDC
Max Charging Current	0.8 A	

¹ Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.

NOTE: Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.

4. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION	
Operating Temperature	Overtemperature protection (Start-up type tested: - 40°C ²)	- 40 to + 70°C	
Storage Temperature		- 40 to + 80°C	
Derating	LDB120-12	- 0.75 W/°C over 50°C	
	LDB120-24	- 1.2 W/°C over 50°C	
Humidity	Non-condensing	5 - 95% RH	
Overvoltage Category		III (EN50178)	
Pollution Degree		2 (IEC60664-1)	
Protection Class		Class I	
Isolation Voltage	Input to Output	4.2 kVDC	
	Input to Ground	2.2 kVDC	
	Output to Ground	0.75 kVDC	
Safety Standards & Approvals	UL508 (reference)		
	EN60950 (reference)		
	EN50178 (reference)		
EMC Standards	Emission	Class A	
	Immunity	EN55022 (CISPR22)	Class A
		EN55011 (CISPR11)	Level 3
		EN61000-4-2	Level 2
		EN61000-4-3	Level 2
		EN61000-4-4	Level 3
EN61000-4-5	Level 2		
EN61000-4-11	Level 2		
Protection Degree	EN60529	IP20	
Vibration Sinusoidal	IEC 60068-2-6	5-17.8 Hz: ±1.6 mm; 17.8-500 Hz: 2g 2Hours / axis (X,Y,Z)	
Shock	IEC 60068-2-27	30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total	

² Possible at nominal voltage with load deration.

5. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Weight		500 g
Dimensions		54 x 115 x 110 mm
Mounting Rail		IEC 60715/H15/TH35-7.5(-15)
Connection Terminals	Screw type pluggable (24 - 12 AWG)	2.5 mm ²
Case Material	Aluminum	



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

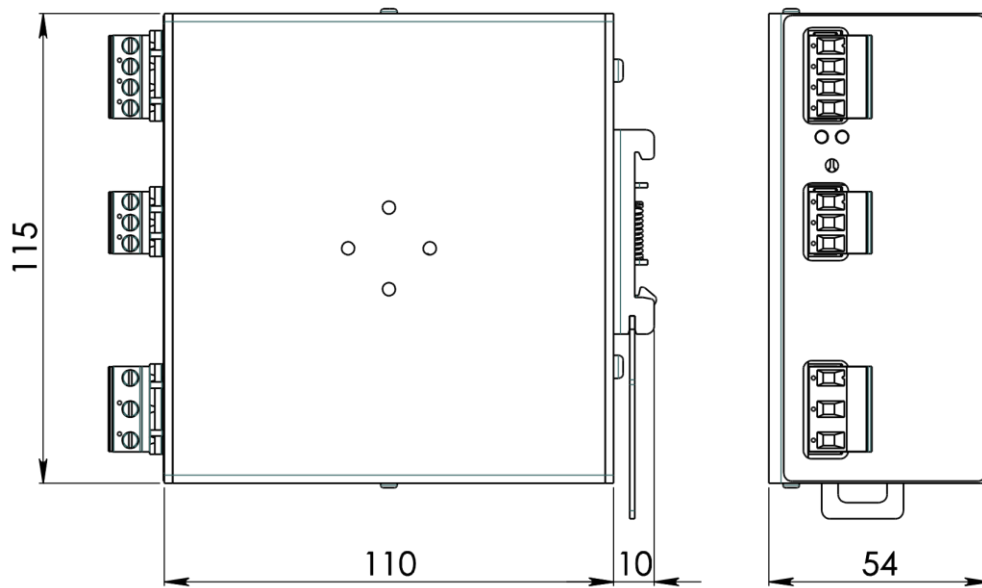


Figure 1. Mechanical Drawing

6. PIN LAYOUT & DESCRIPTION



INPUT CONNECTION	OUTPUT CONNECTION
<p>Single phase:</p> <ul style="list-style-type: none"> L = Line N = Neutral ⊖ = Earth ground <p>DC:</p> <ul style="list-style-type: none"> L = + Positive DC N = - Negative DC ⊖ = Earth ground 	<ul style="list-style-type: none"> LOAD (+/-) = connect to DC (+/-) Load BATTERY (+/-) = connect to Battery (+/-) PS ON PSU = dry contact NC LOAD ON BATTERY = dry contact NO <p>Signaling:</p> <p>SPDT dry contact</p> <ul style="list-style-type: none"> NO NC COM

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.