

R36AS – AC Operated RVDT for Harsh Environments



- AC operation
- ± 60 degree angular sensing range
- Non-contact electrical design
- Wide operating temperature range
- Size 15 servo mount
- Stainless steel housing
- MS style hermetic connector

DESCRIPTION

The **R36AS RVDT** (Rotary Variable Differential Transformer) is an angular position sensor that incorporates a proprietary non-contact design which dramatically improves long term reliability when compared to other traditional rotary devices such as synchros, resolvers and potentiometers. This unique design eliminates assemblies that degrade over time such as slip rings, rotor windings, contact brushes and wipers, without sacrificing accuracy.

High reliability and performance are achieved through the use of a specially shaped rotor and wound stator coil that together simulate the operation of a Linear Variable Differential Transformer (LVDT). Rotational movement of the rotor shaft results in a linear change in the amplitude of the output signal, directly proportional to the shaft angle change, while the phase of this signal indicates the direction of displacement from the null point. Non-contact electromagnetic coupling of the rotor provide infinite resolution.

AC operation eliminates the need for integrated signal conditioning components, thereby offering the user a very wide operating temperature range of -55°C to $+150^{\circ}\text{C}$. Factory calibrated to operate over a ± 30 degree range, the R36AS offers a non-linearity of less than $\pm 0.5\%$ of full range. Extended range operation up to a maximum of ± 60 degrees is possible with increased non-linearity.

Packaged in Size 15 servo mount stainless steel housing, an MS style hermetic connector, and a shaft seal, the R36AS is the perfect choice for angular position sensing in harsh environments.

Also see our other angular position sensor models, **R30A** (AC operation, aluminum housing), **RSYN** (high output, shock and vibration tolerant), **R30D and R60D** (bipolar DC operation), and the **RVIT-15 Series** (single ended DC operation, voltage or current output).

Measurement Specialties, Inc. (NASDAQ MEAS) offers many other types of sensors and signal conditioners. Data sheets can be downloaded from our web site at: <http://www.meas-spec.com/datasheets.aspx>

*MEAS acquired Schaevitz Sensors and the **Schaevitz™** trademark in 2000.*

FEATURES

- High accuracy
- Infinite resolution
- Long term reliability
- Wide -55° to $+150^{\circ}\text{C}$ operating temp range
- Rugged stainless steel housing
- Shielded ABEC 3 precision bearings

APPLICATIONS

- Valve position
- Machine tool equipment
- Rotary actuator feedback
- Dancer arm position
- Process control

R36AS – AC Operated RVDT for Harsh Environments

PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS						
Parameter	@2.5kHz Input Frequency <i>(recommended)</i>			@10kHz Input Frequency		
Angular range, degrees	±30°	±45°	±60°	±30°	±45°	±60°
Non-linearity, % of FR, maximum	±0.25%	±0.5%	±2%	±0.25%	±0.5%	±2%
Output at range ends (*)	66mV/V	99mV/V	132mV/V	51 mV/V	76 mV/V	102 mV/V
Sensitivity	2.2 mV/V/degree			1.7 mV/V/degree		
Temp coefficient of sensitivity	0.02%/°F [0.036%/°C] +20 to +160°F [-7 to +71°C]			Not specified		
Input / Output impedances	750Ω / 2000 Ω			2500Ω / 5400Ω		
Phase shift	+4°			-17°		
Input voltage and frequency	3 VRMS @ 2.5 to 10 kHz (2.5kHz recommended)					
Null voltage	0.5% of FRO, maximum					
ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS						
Operating temperature	-67°F to +300°F [-55°C to 150°C]					
Mechanical angular range	360 degrees (no stops)					
Bearings	Shielded ABEC 3 precision					
Shaft diameter	3/16 inch [4.75 mm]					
Housing material	AISI 304 stainless steel					
Mounting	Size 15 servo mount per BU-ORD					
Moment of inertia	1.62 x 10 ⁻⁶ inch.lb-force.second ² [1.866 x 10 ⁻⁶ Kg-force.cm.second ²]					
Maximum torque, unbalance	0.012 inch.ounce-force [0.87 gram-force.cm]					
Maximum torque, friction	0.75 inch.ounce-force [54 gram-force.cm]					
Shaft load capability	25 lb [11Kg] Axial or Radial					
Electrical connection	6-pin MS type connector (MIL-C-5015)					
Weight	9 oz [255 Grams]					
IP 60529 rating	IP65					

Notes:

All values are nominal unless otherwise noted


Dimensions are in inch [mm] unless otherwise noted

(*): Unit for output at range ends is millivolt per volt of excitation (input voltage)

FR (Full Range) is the angular range, end to end; 2xA° for ±A° angular range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range


DIMENSIONS

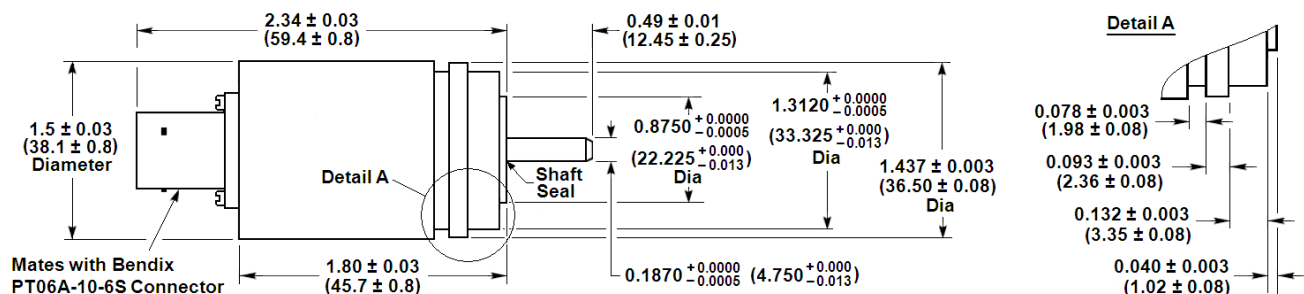

Dimensions are in inch (mm)

R36AS – AC Operated RVDT for Harsh Environments

WIRING INFORMATION

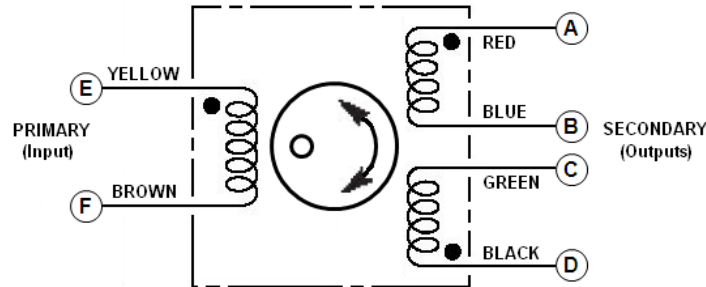

A through F: Connector pin assignments; Connect B to C for differential output

ORDERING INFORMATION

Description	Model	Part Number
RVDT $\pm 30^\circ$, 2.5kHz calibration (standard)	R36AS	02560927-000
RVDT $\pm 45^\circ$, 2.5kHz calibration, $\pm 0.5\%$ of FR linearity	R36AS	02560927-045
ACCESSORIES		
Multipurpose coupling kit	R-FLEX	66530072-000
Mating connector kit	PT06A-10-6S(SR)	62101011-000
Interconnect cable for LVM-110/LiM 4-20/CTS 420 Conditioners (1)	R36AS to Stripped/Tinned	04290417-000
Interconnect cable for ATA-2001 Signal Conditioner (1)	R36AS to DB-9P	04290457-000
Interconnect cable for MP2000 Series Set-Point Controller (1)	R36AS to 05BL5M	04290560-000
Interconnect cable for LDM/PML-1000 Signal Conditioners, 200°C (1)	R36AS to Stripped/Tinned	04290595-000

(1) All cables are shielded, 10 foot long, and rated 80°C [176°F] operating unless otherwise noted. Consult factory for other lengths.

Refer to our ["RVDT and RVIT Accessories"](#) data sheet for other accessories.

TECHNICAL CONTACT INFORMATION

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: sales@meas-spec.com Web: www.meas-spec.com	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: info.de@meas-spec.com Web: www.meas-spec.com	Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: info.cn@meas-spec.com Web: www.meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.