

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0740611002

Status:

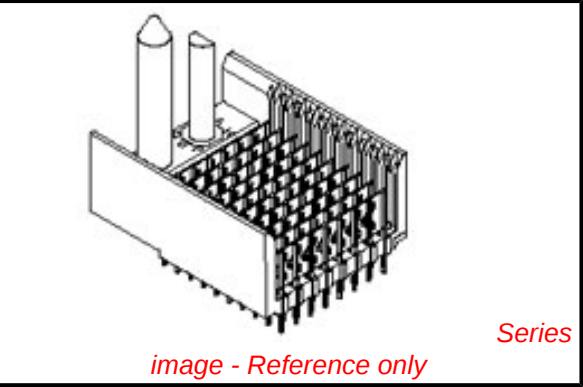
Active

Overview:

[vhdm](#)

Description:

2.00mm (.079") Pitch VHDM® Board-to-Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Pin End Version, 80 Circuits, Pin Length 6.25mm (.246")



Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Backplane Connectors
Series	74061
Application	Backplane
Application Tooling Documents	Tooling Manual
Comments	No Keying Position
Component Type	PCB Header
Overview	vhdm
Product Name	VHDM®
Style	N/A
Physical	
Circuits (Loaded)	80
Circuits (maximum)	80
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Material - Metal	Beryllium Copper, High Performance Alloy (HPA), Stainless Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin-Lead
Material - Resin	High Temperature Thermoplastic
Number of Columns	N/A
Number of Pairs	Open Pin Field
Number of Rows	8
Orientation	Vertical
PC Tail Length (in)	0.098 In
PC Tail Length (mm)	2.50 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.070 In
PCB Thickness Recommended (mm)	1.80 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	30
Plating min: Termination (µm)	0.75
Polarized to PCB	Yes
Stackable	No

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Not Reviewed

Halogen-Free

Status

Halogen-Free

China RoHS



Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

74061Series

Mates With

74040 VHDM® Board-to-Board Daughtercard Receptacle

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
VHDM® Signal Pin Inserter Repair Tool	0622015700
VHDM® 8 Row and Shield Repair Tool	0622015900
VHDM® 8 Row Shield Extraction Tool	0622016100

Surface Mount Compatible (SMC)	Yes	VHDM® Insertion <u>0622020205</u>
Temperature Range - Operating	105°C max	Module for Advanced
Termination Interface: Style	Through Hole - Compliant Pin	Mate Signal Header,
Electrical		8 Row by 10 Wide,
Current - Maximum per Contact	1A	20.00mm (.787")
Data Rate	3.125 Gbps	VHDM® Insertion <u>0622020209</u>
Real Signals (per 25mm)	100	Module for Standard
Shield Type	Ground Plane Shield	Shield Signal
Shielded	Yes	Header, 8 Row by
Voltage - Maximum	120V AC (RMS)/DC	10 Wide, 20.00mm
Material Info		(.787")
		Flat Rock Tooling for <u>0622013700</u>
		Pneumatic Press
Reference - Drawing Numbers		
Sales Drawing	SD-74061-002	
VHDM and Very High Density Metric are trademarks of Amphenol Corporation		

This document was generated on 06/01/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



BACKPLANE HOLE PATTERN RECOMMENDED DIMENSION

NOTES:

1. MATERIALS:

HOUSING - LIQUID CRYSTAL POLYMER (LCP),
GLASS-FILLED, UL 94V-0, COLOR: BLACK
SIGNAL PIN & SHIELD - COPPER ALLOY

2. FINISHES:

CONTACT AREA: SELECTIVE GOLD (Au)
PCB TAILS: SELECTIVE TIN/LEAD (Sn/Pb)
OR SELECTIVE MATTE TIN (Sn)
NICKEL (Ni) OVERALL.

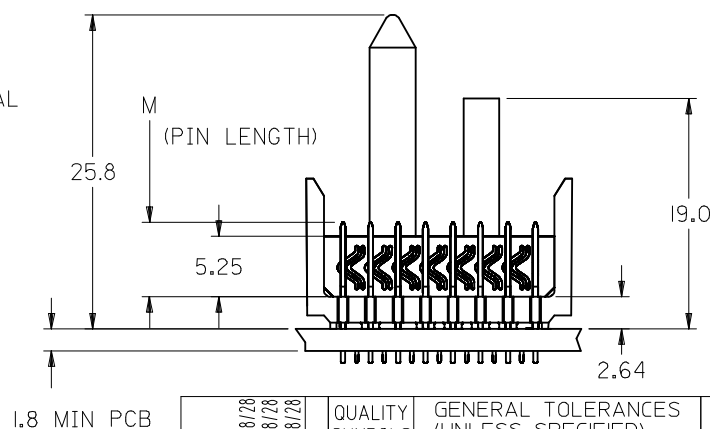
3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-74031-999

4. FOR MIXED CONTACT LENGTHS CONSULT MOLEX FOR AVAILABILITY

5. FOR SPECIFIC MATERIAL NUMBERS & MATING INFORMATION REFER TO SHEET 2










6. PACKAGE PER PK-74061-003

7. EITHER MARK PART WITH PART NUMBER & DATE CODE APPROXIMATELY WHERE SHOWN OR PLACE LABEL ON THE TUBE.



CORRECTED DIMS EC NO: UCP2008-0329 DRWN: JONI AK 2007/08/28 CHKD: JONI AK 2007/08/28 APPR: CBIXLER 2007/08/28			DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2.5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm			INCH	DRAWN BY DATE MWANG 1998/11/09		TITLE VHDM 8 ROW SIGNAL END BACKPLANE SALES ASSEMBLY			
4 PLACES ± --- ± ---		CHECKED BY DATE JLAURX 1998/11/09									
3 PLACES ± --- ± ---		APPROVED BY DATE CBIXLER 1998/11/09									
2 PLACES ± --- ± ---		MATERIAL NO.			DOCUMENT NO.		SHEET NO.				
1 PLACE ± --- ± ---		SEE SHEET 2		SD-74061-002		1 OF 3					
ANGULAR ±1/2°		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											

10 9 8 7 6 5 4 3 2 74061


M/N 74061-()	-**0*	-**1*	-**2*	-**3*	-**4*	-**5*	-**6*	-**7*	-**8*
KEYING PIN ORIENTATION	O	A	B	C	D	E	F	G	H
									

74061 - * * * *

NUMBER OF COLUMNS/PLATING
10 = 10 COLUMN TIN/LEAD
12 = 12 COLUMN TIN/LEAD*
25 = 25 COLUMN TIN/LEAD
90 = 10 COLUMN MATTE TIN
92 = 12 COLUMN MATTE TIN*
85 = 25 COLUMN MATTE TIN

CONTACT LOAD
(PIN LENGTH)
1 & 6 = 4.75
2 & 7 = 6.25
3 & 8 = 4.25
4 & 9 = 5.15

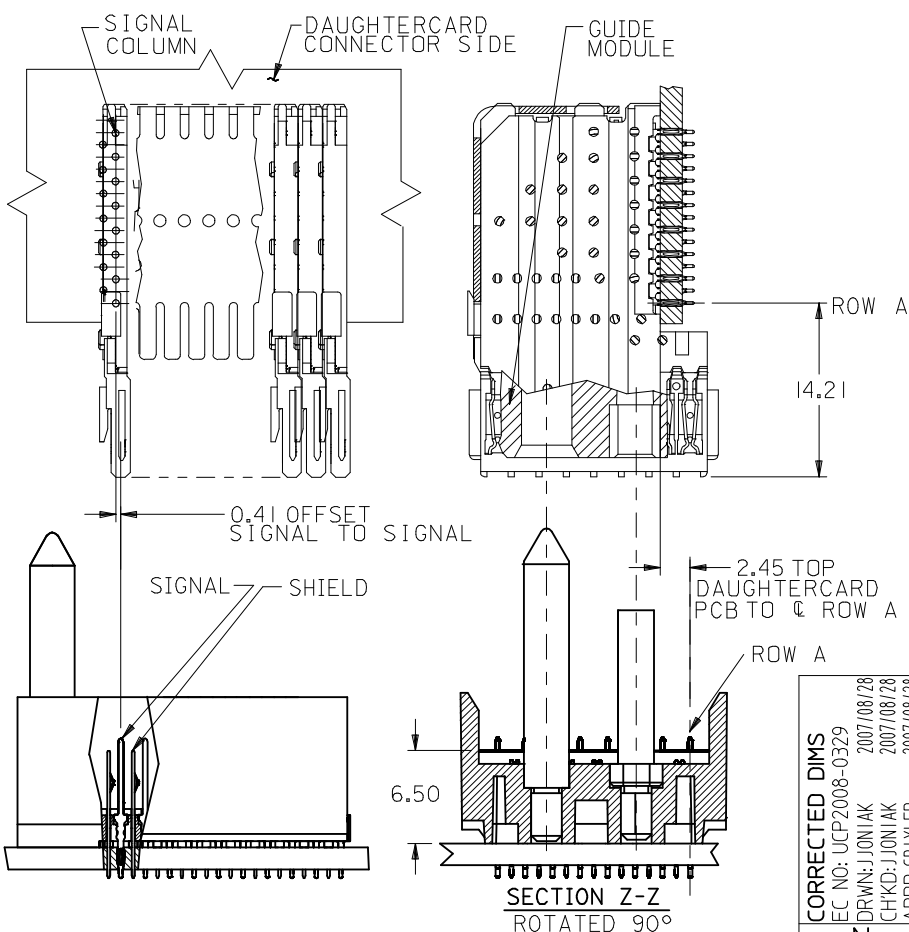*12 COLUMN P/N'S ON SHEET 3



PART NUMBER	COLUMN	NUMBER OF SIGNAL	NUMBER OF PIN	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um) THICKNESS
74061-*0*1	10	80	10	10	27.00	18.00	4.75	0.76	0.76-1.52
74061-*0*6								1.27	
74061-*5*1	25	200	25	25	57.00	48.00	6.25	0.76	
74061-*5*6								1.27	
74061-*0*2	10	80	10	10	27.00	18.00	6.25	0.76	
74061-*0*7								1.27	
74061-*5*2	25	200	25	25	57.00	48.00	6.25	0.76	
74061-*5*7								1.27	
74061-*0*3	10	80	10	10	27.00	18.00	4.25	0.76	
74061-*0*8								1.27	
74061-*5*3	25	200	25	25	57.00	48.00	4.25	0.76	
74061-*5*8								1.27	
74061-*0*4	10	80	10	10	27.00	18.00	5.15	0.76	
74061-*0*9								1.27	
74061-*5*4	25	200	25	25	57.00	48.00	5.15	0.76	
74061-*5*9								1.27	

CORRECTED DIMS EC NO: UCP2008-0329 DRWN: JONI AK 2007/08/28 CHKD: JONI AK 2007/08/28 APPR: CBIXLER 2007/08/28	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
			MM ONLY		2.5:1	METRIC				
			mm	INCH	DRAWN BY		DATE		TITLE	
			4 PLACES	± --- ± ---	MWANG		1998/11/09		VHDM 8 ROW	
			3 PLACES	± --- ± ---	CHECKED BY		DATE		SIGNAL END BACKPLANE	
			2 PLACES	± --- ± ---	JLAURX		1998/11/09		SALES ASSEMBLY	
DESCRIPTION	REV	1 PLACE	± --- ± ---	APPROVED BY		DATE		MOLEX MOLEX INCORPORATED		
		ANGULAR ±1/2°		CBIXLER		1998/11/09				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
				SEE CHART		SD-74061-002		2 OF 3		
				SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
				B						

6

5

4

3

2

1

12 COLUMN P/N CHART

PART NUMBER	COLUMN	NUMBER OF SIGNAL	OF PIN	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um) THICKNESS
74061-*2*1	12	96	12	12	31.00	22.00	4.75	0.76	0.76-1.52
74061-*2*6								1.27	
74061-*2*2	12	96	12	12	31.00	22.00	6.25	0.76	
74061-*2*7								1.27	
74061-*2*3	12	96	12	12	31.00	22.00	4.25	0.76	
74061-*2*8								1.27	
74061-*2*4	12	96	12	12	31.00	22.00	5.15	0.76	
74061-*2*9								1.27	

CORRECTED DIMS EC NO: UCP2008-0329 DRWN: J JONI AK 2007/08/28 CHKD: J JONI AK 2007/08/28 APPR: CB IXLER 2007/08/28 N				DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ⌒=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 2.5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm			INCH	DRAWN BY MWANG	DATE 1998/11/09	TITLE VHDM 8 ROW SIGNAL END BACKPLANE SALES ASSEMBLY						
4 PLACES			± ---			± ---	CHECKED BY JLAURX	DATE 1998/11/09							
3 PLACES			± ---			± ---									
2 PLACES			± ---			± ---									
1 PLACE			± ---			± ---	APPROVED BY CB IXLER		DATE 1998/11/09	MOLEX MOLEX INCORPORATED					
ANGULAR			±1/2°			MATERIAL NO. SEE CHART		DOCUMENT NO. SD-74061-002					SHEET NO. 3 OF 3		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOTBE USED WITHOUT WRITTEN PERMISSION							

5

4

3

2

1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.