




SINGLE-BOARD
COMPUTER

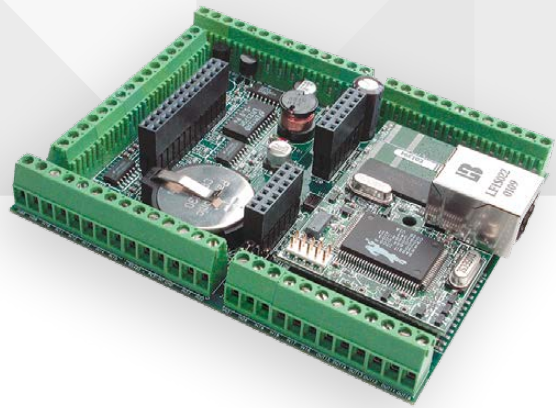

RABBIT® SBC BL2100 SERIES

A high-performance single-board computer designed for medium-scale industrial control and monitoring applications

The BL2100 series is available in four flexible configurations, which feature 40 digital I/O, 3 RS-232/485 serial ports, and a battery-backup for the real-time clock and SRAM for protected data. In addition, the BL2100 and BL2120 models include 11 channels of 12-bit resolution A/D input and 4 channels of 12-bit D/A output. The BL2100's 16 digital outputs can sink/source up to 200 mA and are configurable in Dynamic C, an easy-to-use C environment.

An optional 7-key 122 x 32 graphic display is available as a cost-effective user interface (a panel-mount, water-resistant NEMA 4 version is also available). The BL2100 boards come standard with screw terminals which, can support 14 AWG wiring or other options such as IDC or friction lock headers.

BENEFITS

- 40 sinking/sourcing digital I/O
- Up to 512K Flash for program and up to 512K SRAM for data
- 16 digital outputs which can sink/source 200 mA
- 11 A/D and 4 D/A with 12-bit resolution
- Up to 4 serial ports: two 3-wire (or one 5-wire) RS-232 and 1 RS-485
- Royalty-free TCP/IP stack

RELATED PRODUCTS



Dynamic C®



Keypad



Serial Flash




Digi Connect®
WAN



Programming
Cable

APPLICATION EXAMPLE

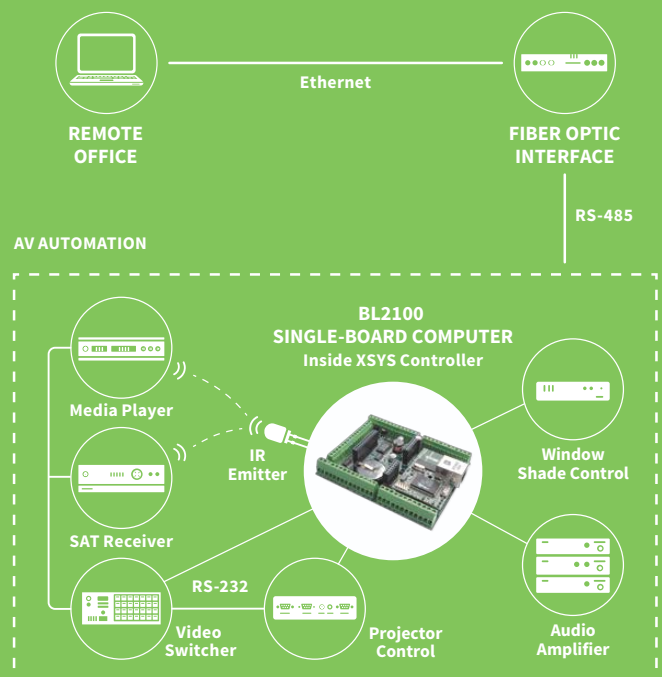

SPECIFICATIONS	BL2100		BL2110		BL2120		BL2130	
FEATURES								
MICROPROCESSOR	Rabbit 2000 at 22.1 MHz							
ETHERNET PORT	10Base-T, RJ-45, link and activity LEDs					None		
FLASH	256K (standard)					256K		
SRAM	128K (standard)					128K		
BACKUP BATTERY	Socketed 3V lithium coin-type, 265 mA.h, supports RTC and SRAM							
KEYPAD/DISPLAY	See keypad/display option (below) and our "OP" products (for serial display options)							
DIGITAL INPUTS	24: protected to ± 36 VDC							
DIGITAL OUTPUTS	16: source/sink 200 mA each, 36VDC max.							
ANALOG INPUTS	11 at 1 MΩ, 12-bit resolution, ± 10 VDC, up to 4,100 samples/sec.	None		11 at 1 MΩ, 12-bit resolution, ± 10 VDC, up to 4,100 samples/sec.		None		
ANALOG OUTPUTS	Four 12-bit resolution, 0-10 VDC*, update rate 12 kHz	None		Four 12-bit resolution, 0-10 VDC*, update rate 12 kHz		None		
SERIAL PORTS	4 total: two 3-wire (or one 5-wire) RS-232, 1 RS-485, and one 5V CMOS-compatible (programming)							
SERIAL RATE	Max. burst rate = CLK/32; Max. sustained rate = burst/2							
CONNECTORS	Screw terminals support max. 14 AWG/1.5 mm2 (standard)							
REAL-TIME CLOCK	Yes							
TIMERS	Five 8-bit timers (four cascadable from the first) and one 10-bit timer with 2 match registers							
WATCHDOG TIMER/SUPERVISOR	Yes							
POWER	9-36 VDC, 1.5W max. (without display), 3W max. (with display)							
OPERATING TEMPERATURE	-40° C to +70° C							
HUMIDITY	5-95%, non-condensing							
BOARD SIZE	4.14” x 3.41” x 0.93”; (105 mm x 87 mm x 24 mm)							

SPECIFICATIONS	Keypad/Display Option
FEATURES	
LCD PANEL	122 x 32 graphic LCD in two stacked sections (with programmable backlight); Relegendable keypad with 7-key/7-LED interface
LEDS	7 user-programmable: 1 red, 4 green, 2 yellow
OPERATING TEMPERATURE	0° C to 50° C
BOARD SIZE	3.00" x 2.6" x 0.75"; (76 mm x 66 mm x 19 mm)
ENCLOSURE SIZE	5.60" x 4.875" x 1.5"; (142 mm x 124 mm x 38 mm)

PART NUMBERS	DESCRIPTION
20-101-0461	BL2100 Ethernet, Analog
20-101-0462	BL2110. Ethernet, no Analog
20-101-0463	BL2120. Analog, no Ethernet
20-101-0464	BL2130. No Analog, no Ethernet
20-101-0502	Keypad/Display Option

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001660
C1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.