


P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

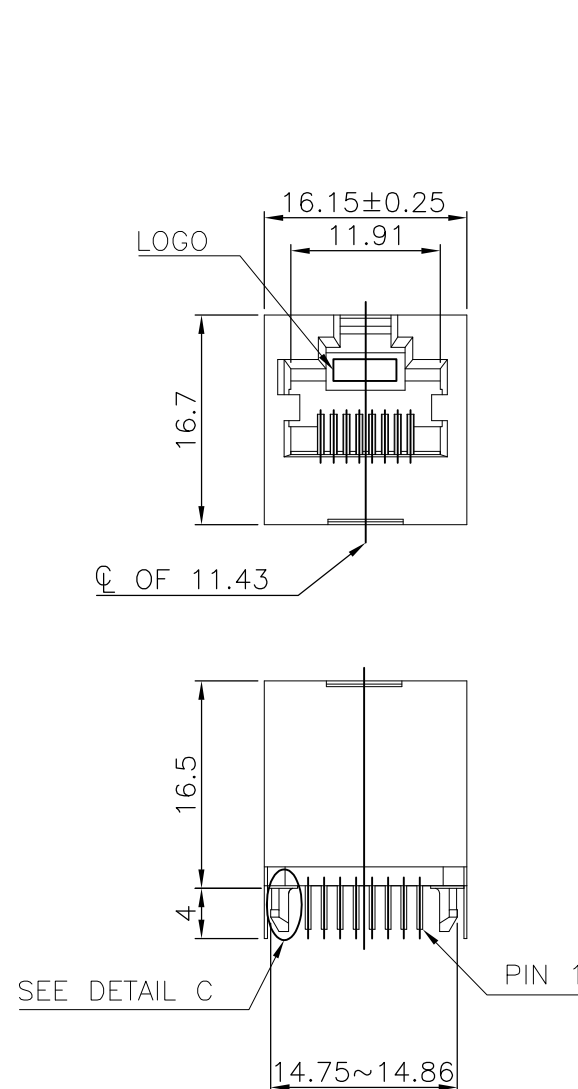

HOUSING: PA46, WITH 30% GF, UL94 V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: BRASS.



CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
GOLD FLASH ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED
1.27 μ m [50 μ "] MIN. NICKEL.

SHELL: 0.508 μ m [20 μ "] MIN. NICKEL PLATED.


POST DIPPED WITH TIN ON PCB GROUND TABS.

3. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION B.


4. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

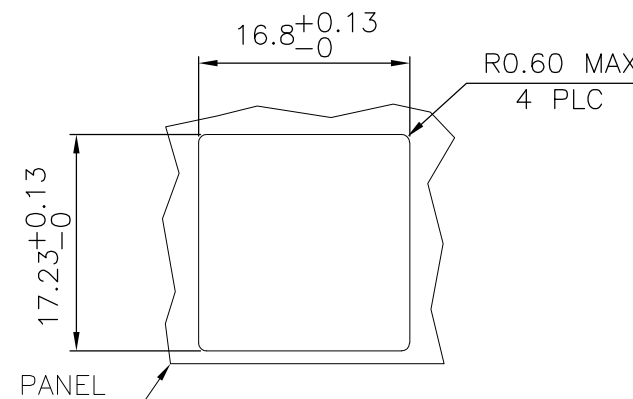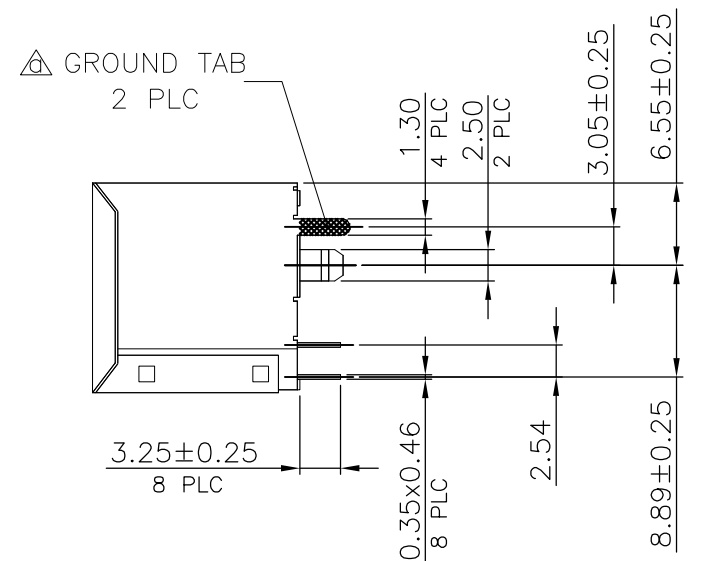

RECOMMENDED	SUGGESTED	PANEL	CUTOUT
-------------	-----------	-------	--------

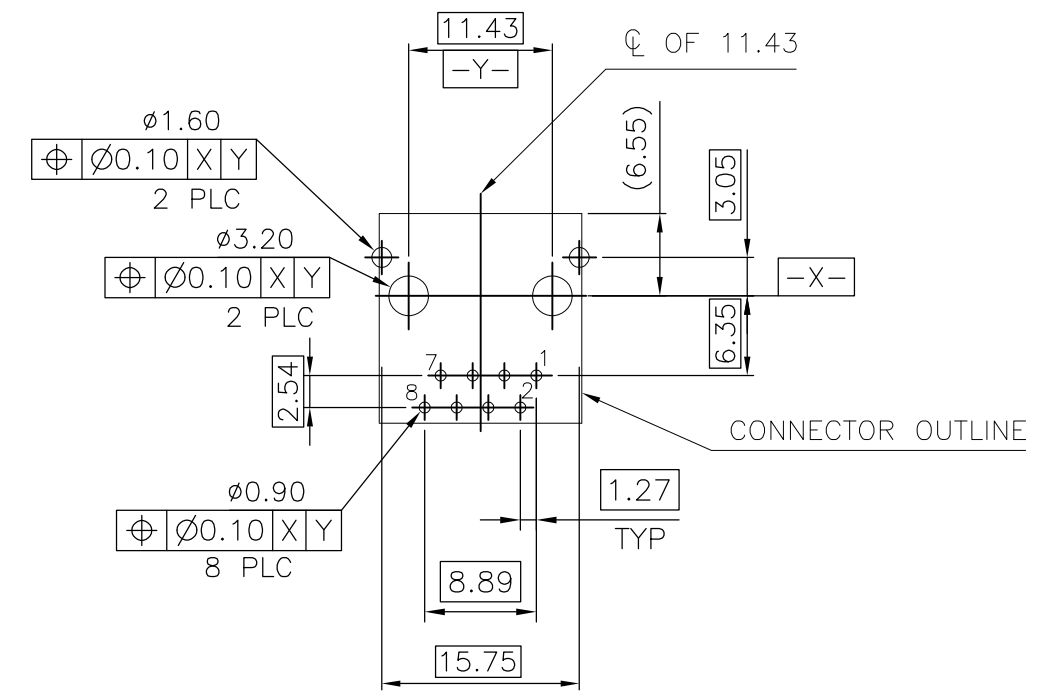


RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05 (TOP VIEW)

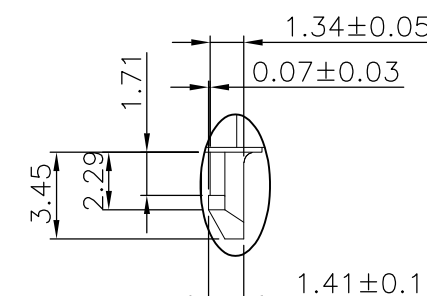


DETAIL C (SCEALE 2:1)

△	1.27μm [50μ"]	3-1734577-5
	1.27μm [50μ"]	3-1734577-4
COMPLETE	0.762μm [30μ"]	3-1734577-3
	0.381μm [15μ"]	3-1734577-2
	0.152μm [6μ"]	3-1734577-1
	MIN. GOLD THICKNESS	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING 21JUL2009 CHK S. CHIEN 21JUL2009 APVD W. KODAMA 21JUL2009		 TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		NAME MODULAR JACK CONNECTOR RJ45, 8P8C, VERTICAL, DIP TYPE. -			
		PRODUCT SPEC 108-57527 APPLICATION SPEC -		SIZE A3		CAGE CODE 00779	
MATERIAL SEE NOTE		FINISH SEE NOTE		DRAWING NO C-1734577		RESTRICTED TO -	
WEIGHT 6.7 GRAMS				SCALE 1:1		SHEET 2 OF 5	
CUSTOMER DRAWING				REV D			

MODULAR JACK WITH LED

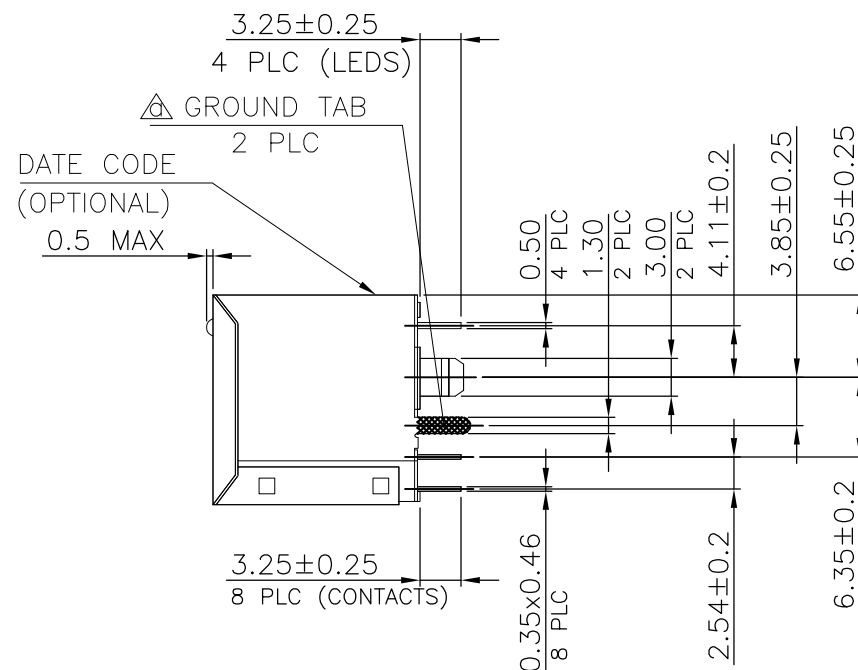


1. MATERIAL:

- 1.1 HOUSING: PA46, WITH 30% GF, UL94 V-0, BLACK COLOR.
- 1.2 CONTACTS: PHOSPHOR BRONZE.
- 1.3 SHELL: BRASS.
- 1.4 LED SOLDER TAIL: STEEL.
2. FINISH:
 - 2.1 CONTACTS: (SEE TABLE) GOLD PLATED ON CONTACT AREA,
GOLD FLASH ON SOLDER TAIL AREA,
1.27um [50u"] MIN. NICKEL UNDERPLATING OVERALL.
 - SHELL: 0.508um [20μ"] MIN. NICKEL PLATED.
 - a POST DIPPED WITH TIN ON PCB GROUND TABS.
 - LED SOLDER TAIL: 2.032um [80μ"] MIN. BRIGHT-TIN PLATED.
3. LED MUST BE REFLOW COMPATIBLE TO FOLLOWING
TEMPERATURE PROFILE (FOR 1 CYCLE): ABOVE 160°C FOR
120 SECONDS, PEAKING AT 245°C FOR 20~40 SECONDS.
4. LED DEFECT RATE IS 6000PPM MAX. AFTER IR REFLOW
PROCESS AS NOTE 3.
5. WAVE SOLDER CAPABLE TO 265°C PER TE SPEC 109-202, CONDITION
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SIN

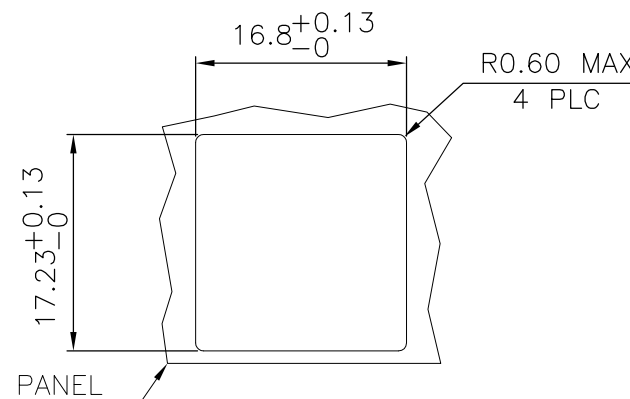


RECOMMENDED	SUGGESTED	PANEL	CUTOUT
-------------	-----------	-------	--------

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

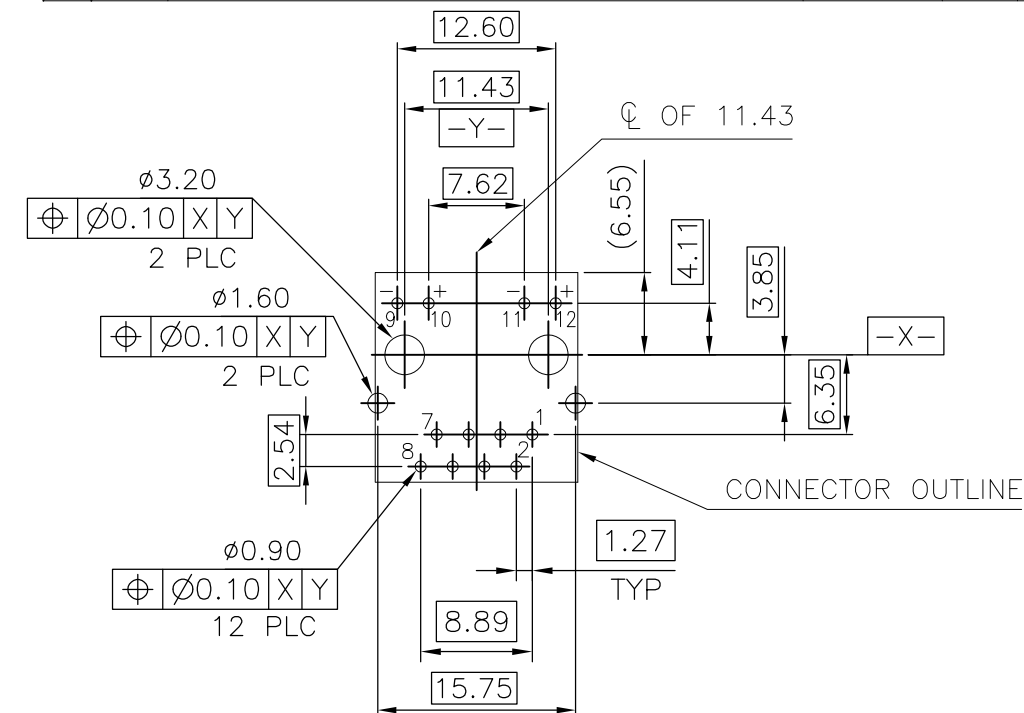


RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05 (TOP VIEW)

YELLOW	GREEN	0.762μm [30μ"]	7-1734577-3
LED2	LED1	MIN. GOLD THICKNESS	PART NUMBER
INDICATOR COLOR			


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING 21JUL2009 CHK S. CHIEN 21JUL2009 APVD W. KODAMA 21JUL2009		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± — ANGLES ± 3°		NAME MODULAR JACK CONNECTOR RJ45, 8P8C, VERTICAL, DIP TYPE.	
		PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		SIZE A3	CAGE CODE 00779
MATERIAL SEE NOTE		FINISH SEE NOTE		DRAWING NO C-1734577	
CUSTOMER DRAWING				SCALE 1:1	SHEET 3 OF 5
				REV D	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

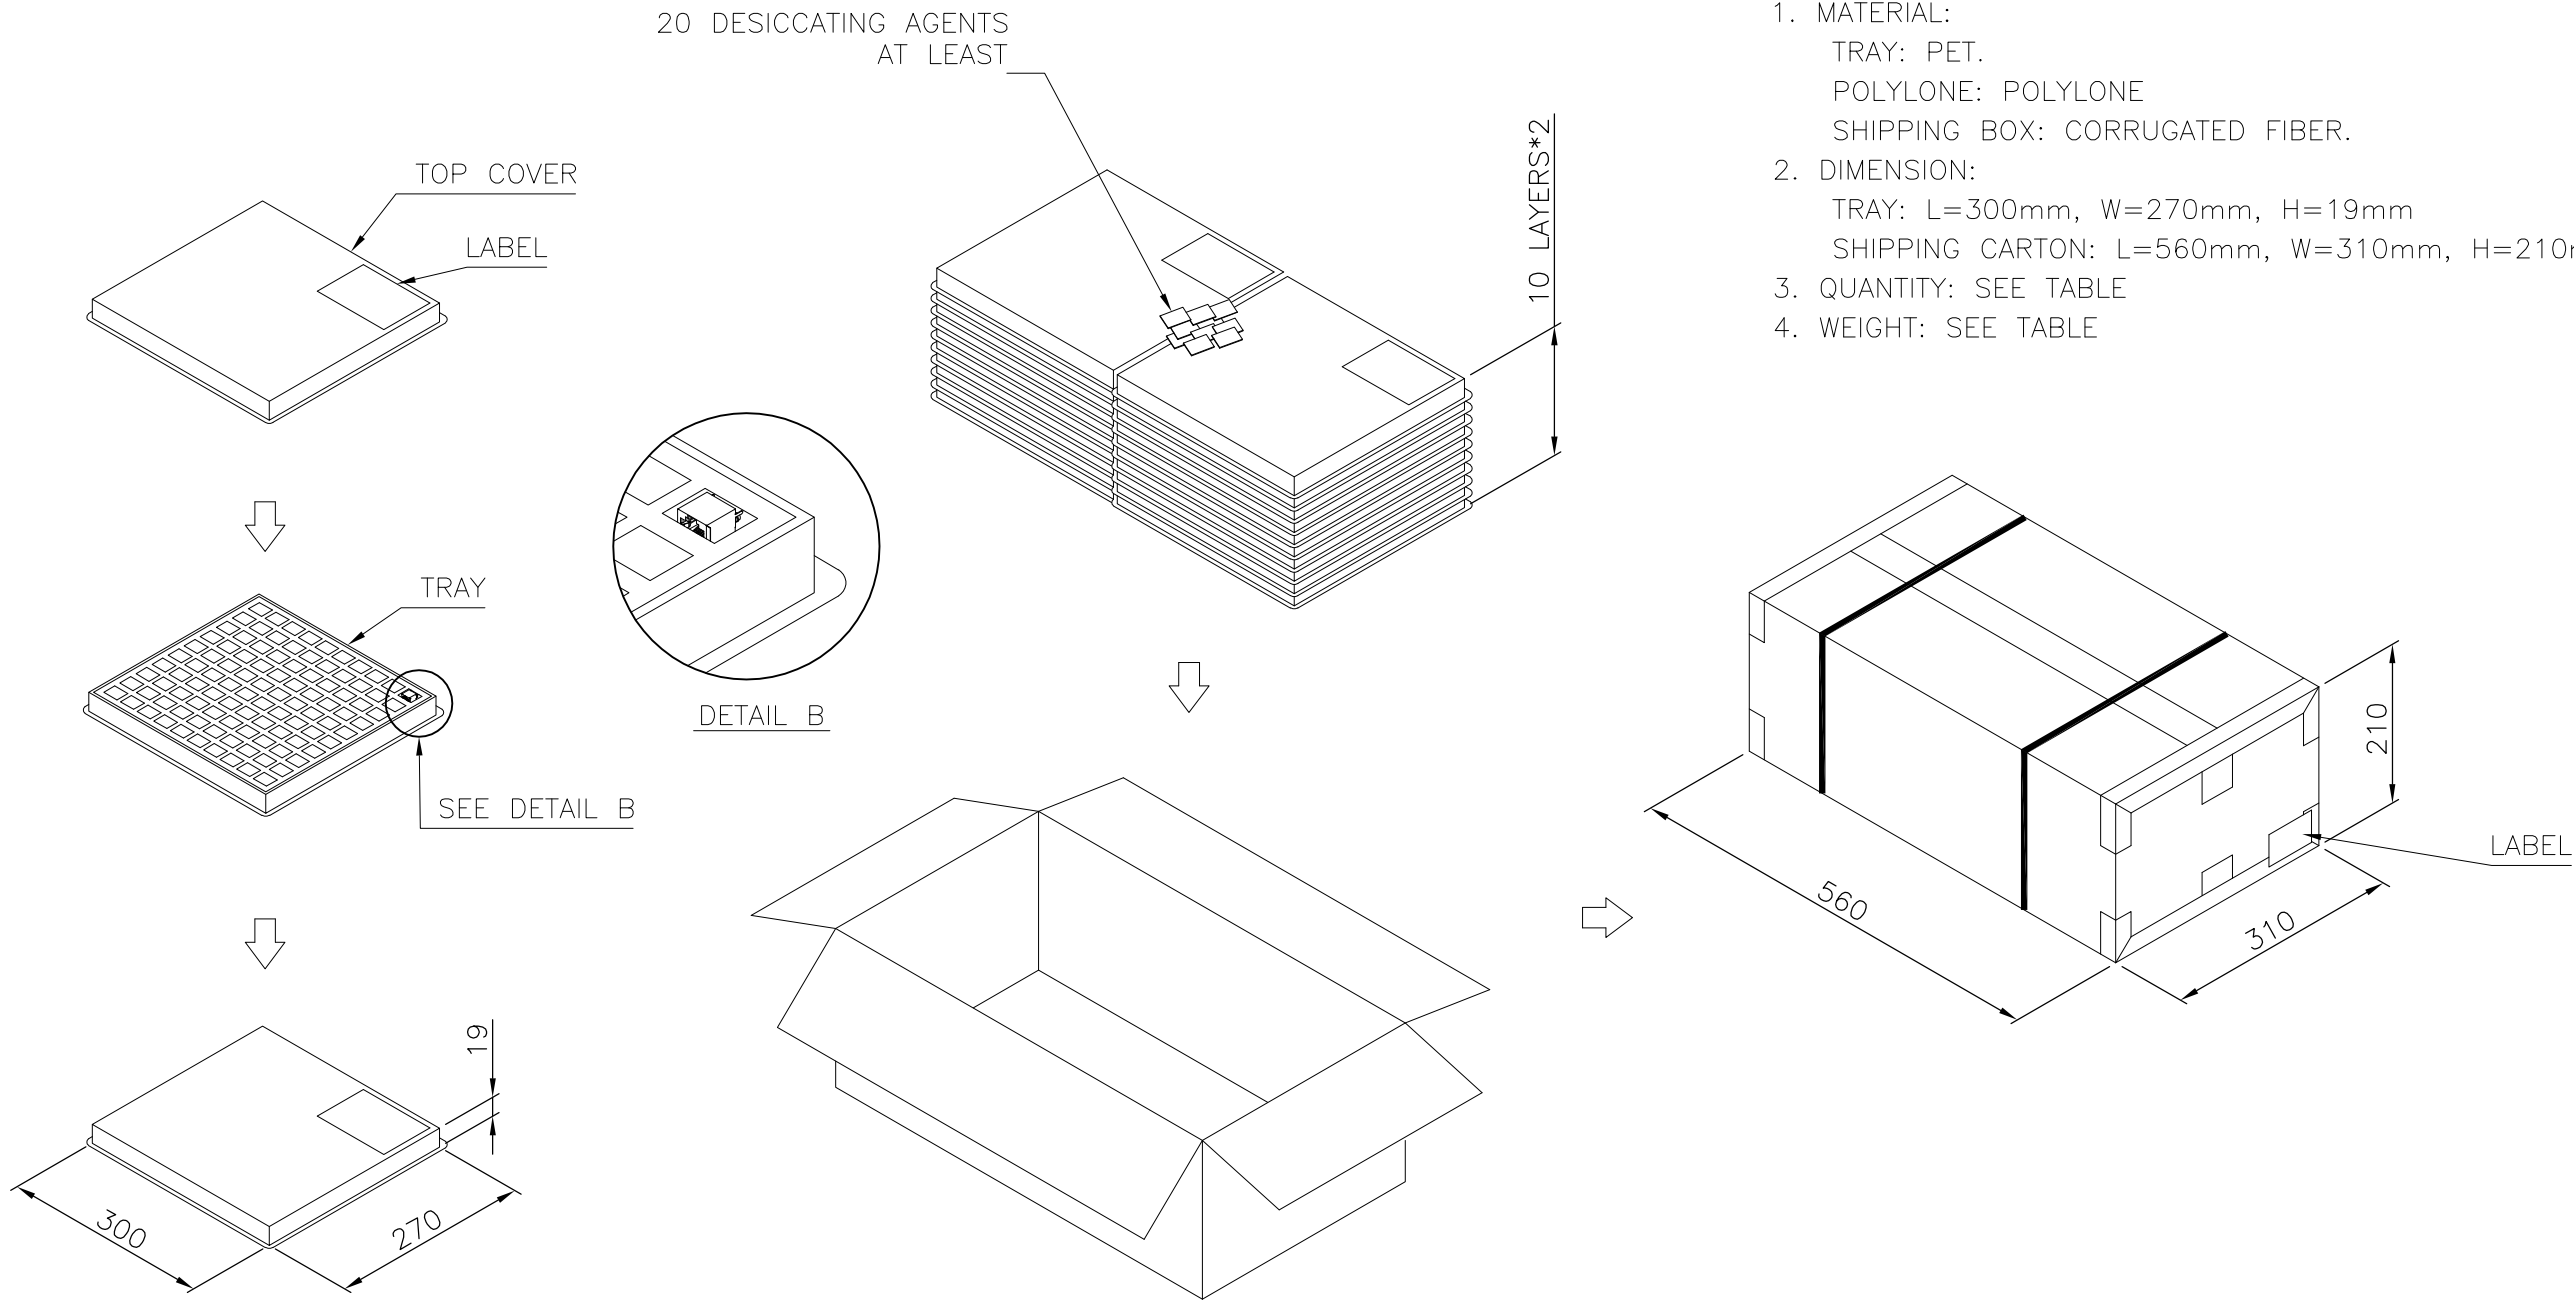


- NOTES:
- MATERIAL:
TRAY: PET.
POLYLONE: POLYLONE
SHIPPING BOX: CORRUGATED FIBER.
 - DIMENSION:
TRAY: L=300mm, W=270mm, H=19mm
SHIPPING CARTON: L=560mm, W=310mm, H=210mm
 - QUANTITY: SEE TABLE
 - WEIGHT: SEE TABLE

15 KG	13.3 KG	100	20	2000
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ BOX	PCS/ BOX

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING	21JUL2009	 TE Connectivity					
		CHK S. CHIEN	21JUL2009						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME MODULAR JACK CONNECTOR RJ45, 8P8C, VERTICAL, DIP TYPE.					
		0 PLC ± -							
		1 PLC ± 0.3							
		2 PLC ± 0.2							
		3 PLC ± 0.15							
		4 PLC ± -		SIZECAGE CODEDRAWING NORESTRICTED TO					
		ANGLES ± 3°							
MATERIAL		FINISH		A300779C-1734577—					
SEE NOTE		SEE NOTE							
CUSTOMER DRAWING				SCALE1:1		SHEET4 of 5		REV D	


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

PACKAGE ONLY FOR 6-1734577-3

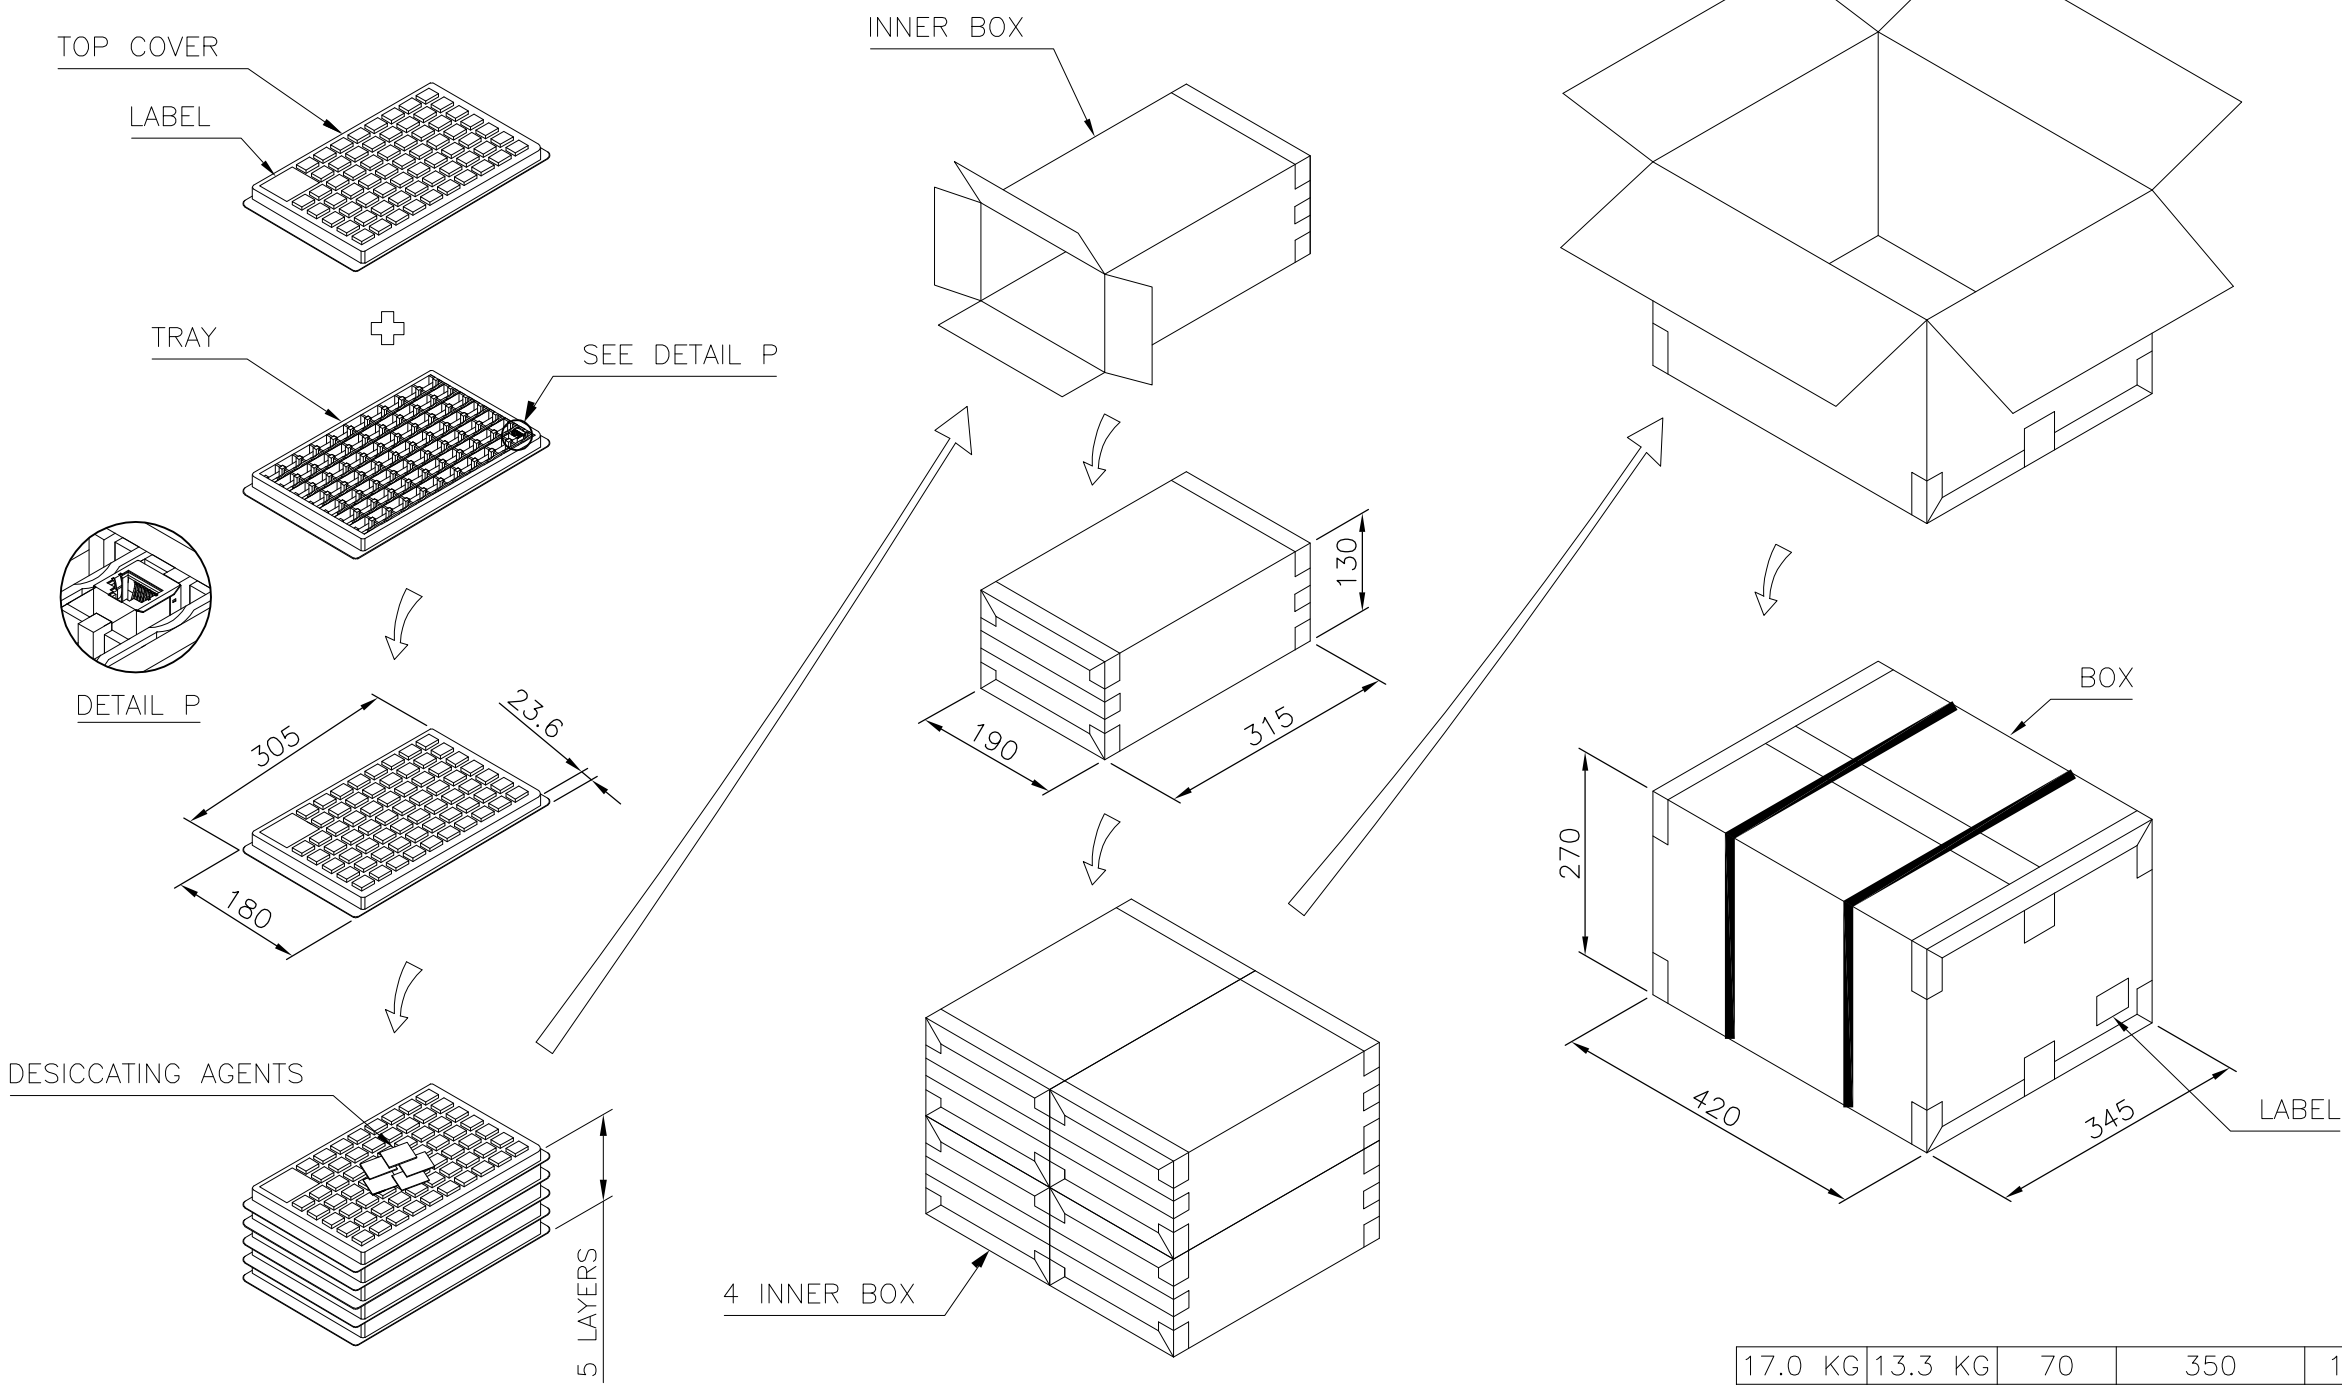

- NOTES:
- MATERIAL:
TRAY: PET.
POLYLONE: POLYLONE
BOX: CORRUGATED FIBER.
 - DIMENSION:
TRAY: L=308mm, W=180mm, H=23.6mm
INNER BOX: L=315mm, W=190mm, H=130mm
BOX: L=420mm, W=345mm, H=275mm
 - QUANTITY: SEE TABLE
 - WEIGHT: SEE TABLE

17.0 KG	13.3 KG	70	350	1400	6-1734577-3
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ INNER BOX	PCS/ BOX	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HSING 21JUL2009		TE Connectivity					
		CHK S. CHIEN 21JUL2009							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME MODULAR JACK CONNECTOR RJ45, 8P8C, VERTICAL, DIP TYPE.					
		0 PLC ± —							
		1 PLC ± 0.3							
		2 PLC ± 0.2							
		3 PLC ± 0.15		SIZE A3					
		4 PLC ± —					CAGE CODE 00779		
		ANGLES ± 3°							
				RESTRICTED TO —					
MATERIAL SEE NOTE		FINISH SEE NOTE					CUSTOMER DRAWING		
				SHEET 5 of 5					
							REV D		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.