

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0752372104

Status:

Active

Overview:

gbx_backplane_connector_system

Description:

1.85mm by 1.85mm (.073 by .073") Pitch 5-Pair GbX® Backplane Connector System, Left Guide Header, 100 Circuits, Gold (Au) 0.76µm (30µ"), Pin Length 4.55mm (.179")

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-75221-999 (PDF)

Agency Certification

UL

E29179

General

Product Family

Backplane Connectors

Series

75237

Application

Backplane

Application Tooling Documents

Tooling Manual

Comments

Left Guide Header, No Keying Position

Component Type

PCB Header

Overview

gbx_backplane_connector_system

Product Name

GbX®

Style

N/A

Physical

Circuits (Loaded)

100

Circuits (maximum)

100

Color - Resin

Gray (Dark)

Durability (mating cycles max)

200

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

Yes

Keying to Mating Part

Yes

Material - Metal

High Performance Alloy (HPA), Stainless Steel

Material - Plating Mating

Gold

Material - Plating Termination

Tin-Lead

Material - Resin

High Temperature Thermoplastic

Number of Columns

10

Number of Pairs

5

Number of Rows

10

Orientation

Vertical

PC Tail Length (in)

0.091 In

PC Tail Length (mm)

2.30 mm

PCB Locator

No

PCB Retention

Yes

PCB Thickness Recommended (in)

0.063 In

PCB Thickness Recommended (mm)

1.60 mm

Packaging Type

Tray

Pitch - Mating Interface (in)

0.073 In

Pitch - Mating Interface (mm)

1.85 mm

Pitch - Term. Interface (in)

0.073 In

Pitch - Term. Interface (mm)

1.85 mm

Plating min: Mating (µin)


30

Plating min: Mating (µm)

0.76

Plating min: Termination (µin)

30



Series

image - Reference only

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

75237Series

Mates With

75360 GbX® Daughtercard

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Insertion Tool, GbX®	0622022030
5 pair by 10 wide	
Insertion Tool, GbX®	0622022040
5 pair by 20 wide	
GbX® Single Pin	0622022090
Repair Tool	
GbX® Shield	0622022100
Removal Tool	

Plating min: Termination (μm)	0.76
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	1A
Data Rate	8.0 Gbps
Real Signals (per 25mm)	135
Shield Type	Ground Plane Shield
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC

Material Info



Reference - Drawing Numbers

Product Specification	PS-75221-999
Sales Drawing	SD-75237-210

GbX is a registered trademark of Amphenol Corporation.

This document was generated on 05/17/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

20 19 18 17 16 15 14 13 12 11 75237 9 8 7 6 5 4 3 2 1

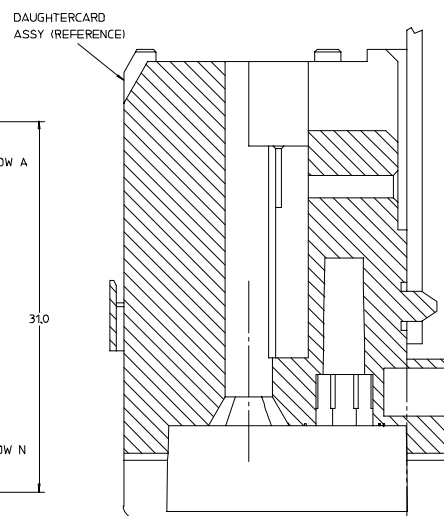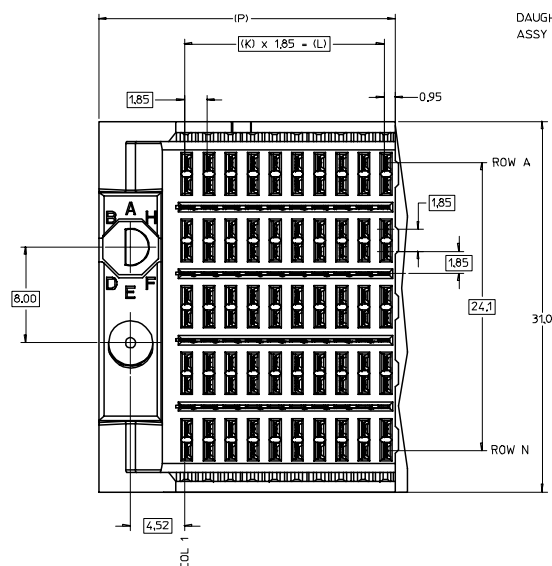

- NOTES:
1. MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0, COLOR - GRAY, SIGNAL CONTACT AND GROUND BLADE - HIGH PERFORMANCE COPPER ALLOY.
 2. FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA, SELECTIVE TIN/LEAD (Sn/Pb) ON PCB TAILS, NICKEL (Ni) OVERALL.
 3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-75221-999.
 4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY. CONTACT PAIRS MUST BE THE SAME LENGTH.
 5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION PLEASE REFER TO CHART.
 6. PACKAGE PER PK-70873-565.
 7. MARK PART NUMBER AND DATE CODE, APPROXIMATELY WHERE SHOWN.
 8. OPTIONAL HOLE LOCATION FOR GROUNDED GUIDE PIN OR ADDITIONAL GUIDE PIN SUPPORT, FOR GROUNDED GUIDE PIN, HOLE TO BE PLATED. DRILL SIZE $\phi 2.58$, PAD SIZE: $\phi 5.50$
 9. THESE PARTS CONFORM TO MOLEX COSMETIC SPECIFICATION PS-45499-002 CLASS B.

MODULE ORIENTATION
2- LEFT



75237-2***

COLUMN
1 = 10 COL
2 = 25 COL

PIN LENGTH
DIM "M"
3-3.55 mm
4-4.55 mm
5-5.55 mm

KEYING ORIENTATION
(SEE TABLE)

PART NUMBER TABLE				
ASSY PART NO.	K	L	P	TOTAL NO. OF DIFFERENTIAL PAIRS
75237-210*	9	16.65	24.78	50
75237-220*	24	44.40	52.53	125

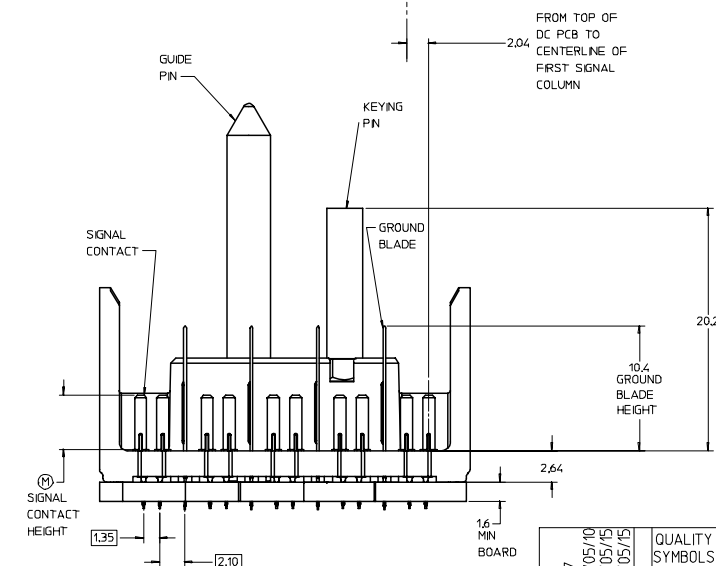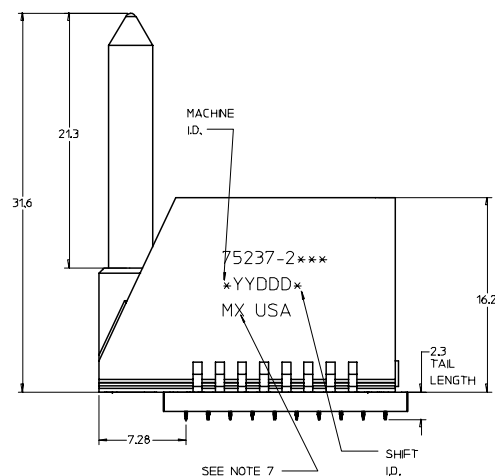


ROWS AG & NG RECOMMENDED FOR ALL APPLICATIONS. THESE ROWS SHOULD BE CONNECTED TO GROUND

$\phi 2.45 \pm 0.10$
SEE NOTE 8

MATING SIDE OF SHIELD (OPPOSITE RIB SIDE OF CONTACT)

MATING SIDE OF SIGNAL (RIB SIDE OF CONTACT)

BACKPLANE HOLE PATTERN (COMPONENT SIDE) 10 POS, SHOWN

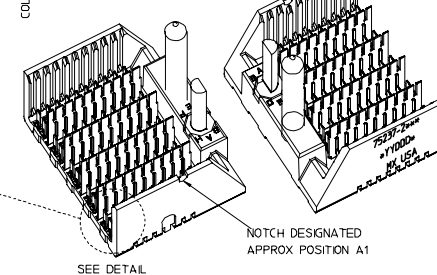

DETAIL SCALE 10:1

SEE DETAIL

NOTCH DESIGNATED APPROX POSITION A1

P/N 75237-()	-xx0*	-xx1*	-xx2*	-xx3*	-xx4*	-xx5*	-xx6*	-xx7*	-xx8*
KEYING PIN ORIENTATION									

REVISED	EC NO: UCP2007-2827 DRWN: JINGHAM 2007/05/10 CHKD: 2007/05/15 APPR: SPEED 2007/05/15	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 5:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	REVISE ON CAD ONLY			
						DIMENSION STYLE			TITLE				
						MM ONLY			GBX 5-PAIR LEFT END BACKPLANE SALES ASSEMBLY				
				4 PLACES	±	---	±		---	DRAWN BY	DATE	MOLEX INCORPORATED	
				3 PLACES	±	---	±		---	NMARTIN	2004/03/11		
			2 PLACES	±	---	±	---	CHECKED BY	DATE				
			1 PLACE	±	---	±	---	SPEED	2004/03/11				
				ANGULAR ±---				APPROVED BY		DATE			
				DRAFT WHERE APPLICABLE		CBIXLER		2004/03/11	MATERIAL NO.	DOCUMENT NO.	SHEET NO.		
				MUST REMAIN WITHIN DIMENSIONS				SEE CHART		SD-75237-210	1 OF 1		
								THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.