




MULTI-PORT
SERIAL CARDS

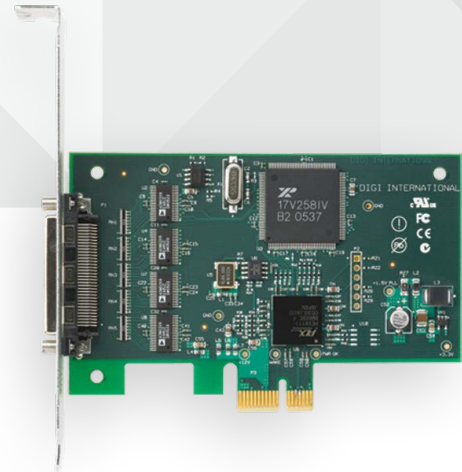

DIGI NEO®

Flexible serial cards deliver reliable, cost-effective and high performance serial port expansion in one of the smallest form factors available

Digi Neo multiport serial cards are designed for reliable serial port expansion in tight workspaces and specialized server/PC environments. They are ideal for point-of-sale, industrial automation, factory control, kiosks and data collection applications.


Leveraging an Application Specific Integrated Circuit (ASIC), Digi Neo delivers up to 921.6 Kbps of throughput. This PCIe compatible card offers on-board surge suppression on each signal, protecting system operation from electrical interference. Additional features include large buffers for data transfer, low latency and baud rate customization.

These low-cost serial cards have one of the smallest form factors available and are one of the only low profile eight-port cards on the market. An extensive range of cabling and software driver options makes Digi Neo a flexible and easy-to-install solution. Enhanced software monitoring and diagnostic tools ensure proper installation and serial port performance.


BENEFITS

- 4 or 8 RS-232 serial ports
- Low Profile and Standard Profile supported
- PCI Express slot support
- Flexible cabling and connector options
- Surge suppression on all signals protects against electrical interference with system operation
- Low latency for reliable performance
- Windows® and Linux® driver support
- Throughput up to 921.6 Kbps

APPLICATION EXAMPLE

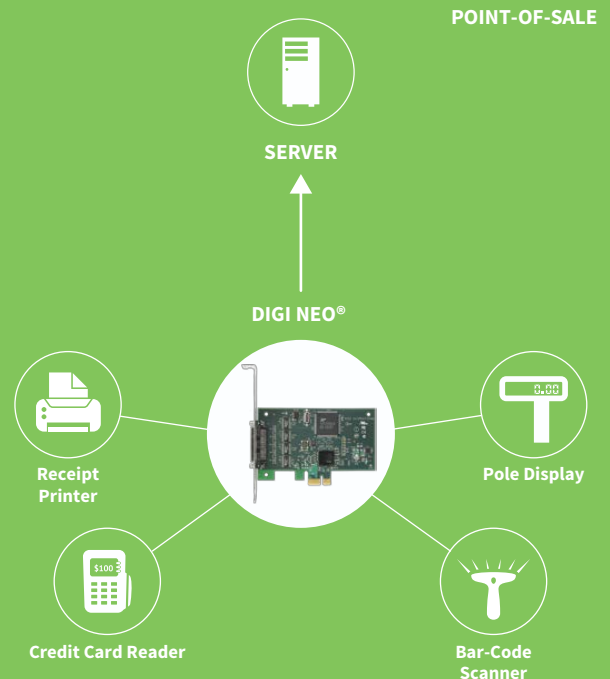

RELATED PRODUCTS

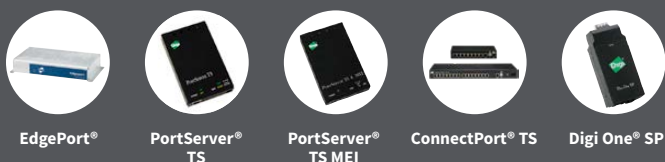

SPECIFICATIONS

Digi Neo® 4- or 8-Port

| BUS INTERFACE | |
|------------------------|---|
| PLATFORM | PCI Express (PCIe) |
| PCI SLOT | PCI Express x1, x2, x4, x8, x12, x16 lane compatible |
| LOW PROFILE PCI | Yes - Low profile bracket included |
| INTERFACES | |
| SERIAL PORTS | 4 or 8 RS-232 |
| SERIAL CONNECTOR | DB-25, 4' DB-9 fan-out cables; DB-9, RJ-45 connector boxes with 6' captive cable |
| THROUGHPUT | Up to 921.6 Kbps |
| FEATURES | |
| OPERATING SYSTEMS | Windows 10®, Windows® 8, Windows® 7, Windows Server 2016, Windows Server® 2012, Windows Vista®, Windows Server® 2003, Windows Server® 2008, Windows® XP, Linux® |
| DIMENSIONS (L X W X H) | 11.99 cm x 1.84 cm x 6.22 cm (4.72 in x 0.72 in x 2.45 in) |
| WEIGHT | 57.00 g (2.00 oz) |
| OTHER | Full modem control, hardware or software flow control, low latency, custom baud rates |
| POWER REQUIREMENTS | |
| TYPICAL (+5V) | 20 mA |
| MAXIMUM (+5V) | 100 mA |
| TYPICAL (+12V) | 100 mA |
| MAXIMUM (+12V) | 150 mA |
| SURGE PROTECTION | 15 kV surge protection on all signals |
| ENVIRONMENTAL | |
| OPERATING TEMPERATURE | 0° C to 55° C (32° F to 131° F) |
| STORAGE TEMPERATURE | -25° C to +85° C (-13° F to +185° F) |
| RELATIVE HUMIDITY | 5% to 90% (non-condensing) |
| REGULATORY APPROVALS | |
| SAFETY | UL 1950, CSA 22.2 No. 950, EN60950, AS3260 |
| EMISSIONS/IMMUNITY | FCC Part 15 (Class B), EN55022 (Class B), EN55024, ICES 003 (Class B), AS3548, VCCI (Class B) |

PART NUMBERS

DESCRIPTION

| 77000889 | Digi Neo PCI Express 8-port w/o cable (low profile bracket included) |
|----------|--|
| 77000890 | Digi Neo PCI Express 4-port w/o cable (low profile bracket included) |
| CABLES | |
| 76000523 | 8-port DTE DB-25M fan-out cable |
| 76000527 | 8-port DTE RJ-45 connector box |
| 76000529 | 8-port DTE DB-9M fan-out cable |
| 76000534 | HD-68M to DB-78F legacy cable converter |
| 76000561 | 8-port DTE DB-9M connector box |
| 76000522 | 4-port DTE DB-25M fan-out cable |
| 76000526 | 4-port DTE RJ-45 connector box |
| 76000528 | 4-port DB-9M straight fan-out cable |
| 76000560 | 4-port DTE DB-9M connector box |

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2020 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001079
J4/220

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.