

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0424109082

Status:

Active

Overview:

modular_plugs_jacks

Description:

Modular Jack, Vertical, 8/4

Documents:

3D Model

Drawing (PDF)

Product Specification PS-42410 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E107635

General

Product Family

Modular Jacks/Plugs

Series

42410

Comments

Flush Mount|Flangeless|2 PCB Thick

Component Type

PCB Jack

Magnetic

No

Overview

modular_plugs_jacks

Performance Category

3

Power over Ethernet (PoE)

N/A

Product Name

RJ45

Physical

Color - Resin

Black

Durability (mating cycles max)

500

Flammability

94V-0

Inverted / Top Latch

N/A

Lightpipes/LEDs

None

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

Polyester

Orientation

Vertical (Top Entry)

PCB Retention

Yes

PCB Thickness Recommended (in)

0.125 In

PCB Thickness Recommended (mm)

3.20 mm

Packaging Type

Tray

Pitch - Mating Interface (in)

0.050 In

Pitch - Mating Interface (mm)

1.27 mm

Ports

1

Positions / Loaded Contacts

8/4

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-40°C to +80°C

Termination Interface: Style

Through Hole

Wire/Cable Type

N/A

Electrical

Current - Maximum per Contact

1.5A

Shielded

No

Voltage - Maximum

125V

Solder Process Data

Duration at Max. Process Temperature (seconds)

5

Lead-free Process Capability

Wave Capable (TH only)

Max. Cycles at Max. Process Temperature

1




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

42410Series

Mates With

FCC 68 Plugs

Process Temperature max. C	235
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-42410-492
Product Specification	PS-42410
Sales Drawing	SDA-42410-****
Test Summary	TS-42878-001

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

20

19

18

17

16

15

14

13

12

11

10

9

8

7

6

5

4

3

2



1

NOTES:


- 1) MATERIALS: HOUSING PARTS ARE MADE OF POLYESTER, RATED U.L. 94 V-0, COLOR IS BLACK; TERMINALS ARE .015/(0.38) THICK PHOSPHOR BRONZE.
- 2) TERMINAL PLATING OPTIONS PER ES-88-***:
 - A - SELECT GOLD IN CONTACT AREA; 50 MICROINCHES MIN.,
 - *SELECT TIN IN PC TAIL AREA; 100 MICROINCHES MIN.,
 - WITH OVERALL NICKEL UNDERPLATE; 50 MICROINCHES MIN.
 - *THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD IN THE PC TAIL.
- 3) THESE MODULAR JACKS MEET THE PERFORMANCE REQUIREMENTS OF MOLEX PRODUCT SPECIFICATION PS-42410.
- 4) CONNECTORS ARE TO BE PACKED IN THERMOFORMED TRAYS, PER PACKAGING SPECIFICATION PK-42410-492.
- 5) ALL JACKS ARE DESIGNED TO BE USED WITH .062/(1.57) OR .125/(3.18) THICK P.C. BOARDS.
- 6) ALL JACKS CONFORM TO AND ACCEPT PLUGS WHICH CONFORM TO FCC RULES AND REGULATIONS PART 68, SUBPART F, WHEN PLATED WITH 50 MICROINCHES GOLD.
- 7) ALL JACKS MUST BE CAPABLE OF FITTING INTO MOLEX GAGE G-42410 (CONNECTOR SIZE 4).
- 8) SEE SHEETS 1 & 4 FOR CONNECTOR SIZE 4.
- 9) SEE SHEETS 2 & 4 FOR CONNECTOR SIZE 6.
- 10) SEE SHEET 4 FOR ASSEMBLY ITEM NUMBERS.
- 11) THIS MODULAR JACK ASSEMBLY IS ALSO AVAILABLE IN A UL 94V-0 RATED, GLASS-FILLED NYLON. (SEE MOLEX DRAWING SDA-43576)
- 12) ENGRAVED NUMBERS ON HOUSING BODY ARE FOR HOLDING IDENTIFICATION ONLY. THEY ARE NOT INTENDED FOR ASSEMBLY IDENTIFICATION PURPOSES.
- 13) ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.

P.C. BOARD THICKNESS	DIM. "D" (MTG. PEGS)	DIM. "F" (P.C. TAILS)
.062/(1.57)	.128 (3.25)	.120 +.015/- .025 (3.05 +.38/- .63)
.125/(3.18)	.191 (4.85)	.205 +.015/- .025 (5.21 +.38/- .63)




CONNECTOR SIZE	CIRCUIT SIZE	DIM. "G"
8	8	.350 (8.89)
8	6	.250 (6.35)
8	4	.150 (3.81)
8	2	.050 (1.27)

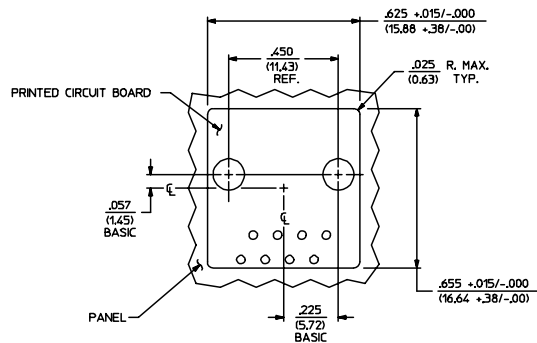

PANEL CUT-OUT FOR CONNECTOR SIZE 8

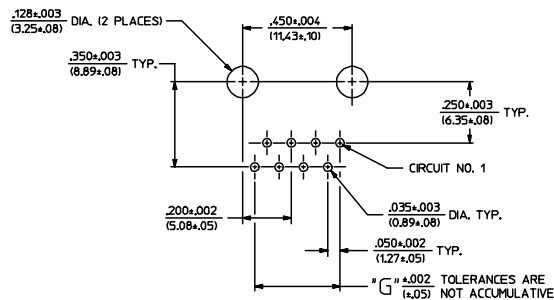

P.C. BOARD LAYOUT FOR CONNECTOR SIZE 8

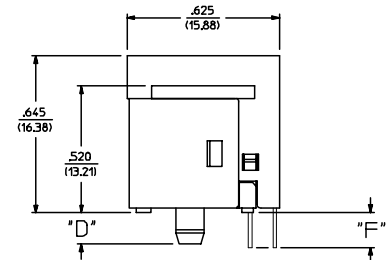

SIZE 8 MODULAR JACK LOADED WITH 8 TERMINALS SHOWN ABOVE

(SEE SHEET 4 FOR PART NUMBER AVAILABILITY)

SEE SHEET ONE EC NO. UFP2004-667 DRAWN: SCHMIDT 2004/03/03 CHKD: SCHMIDT 2004/03/03 APPR: F. SMITH 2004/03/03 REV	QUALITY SYMBOLS 0 0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 4:1 DESIGN UNITS INCH DIMENSION STYLE IN/MM	THIRD ANGLE PROJECTION REVISE ON CAD ONLY	TITLE ASSEMBLY, VERTICAL MODULAR JACKS (CONNECTOR SIZE 8) MOLEX MOLEX INCORPORATED MATERIAL NO. (DOCUMENT NO.) SEE SHEET 4 SDA-42410-****	SHEET NO. 3 OF 4

20

19

18

17

16

15

14

13

12

11

10

9

8

7

6

5

4

3

2

1

SIZE 4 VERTICAL MODJACK ASSEMBLIES

%-NOT TOOLED

ASSEMBLY
ITEM
NUMBER

EXTERNAL
CONNECTOR
SIZE

NUMBER
OF
POSITIONS

P.C.
BOARD
THICKNESS

MOUNTING
EARS
OPTION

TERMINAL
PLATING
OPTION

42410-4168

4 POS. BODY

4

.062/(1.57)

YES

A

42410-4170

↑

↑

.062/(1.57)

NO

A

42410-4264

↓

↓

.125/(3.18)

YES

A

42410-4266

4 POS. BODY

4

.125/(3.18)

NO

A

42410-4312

4 POS. BODY

2

.062/(1.57)

YES

A

42410-4314

↑

↑

.062/(1.57)

NO

A

42410-4408

↓

↓

.125/(3.18)

YES

A

42410-4410

4 POS. BODY

2

.125/(3.18)

NO

A

SIZE 6 VERTICAL MODJACK ASSEMBLIES

%-NOT TOOLED

ASSEMBLY
ITEM
NUMBER

EXTERNAL
CONNECTOR
SIZE

NUMBER
OF
POSITIONS

P.C.
BOARD
THICKNESS

MOUNTING
EARS
OPTION

TERMINAL
PLATING
OPTION

42410-6168

6 POS. BODY

6

.062/(1.57)

YES

A

42410-6170

↑

↑

.062/(1.57)

NO

A

42410-6264

↓

↓

.125/(3.18)

YES

A

42410-6266

6 POS. BODY

6

.125/(3.18)

NO

A

42410-6312

6 POS. BODY

4

.062/(1.57)

YES

A

42410-6314

↑

↑

.062/(1.57)

NO

A

42410-6320

↑

↑

.062/(1.57)

YES

B

42410-6408

↓

↓

.125/(3.18)

YES

A

42410-6410

6 POS. BODY

4

.125/(3.18)

NO

A

42410-6456

6 POS. BODY

2

.062/(1.57)

YES

A

42410-6458

↑

↑

.062/(1.57)

NO

A

42410-6552

↓

↓

.125/(3.18)

YES

A

42410-6554

6 POS. BODY

2

.125/(3.18)

NO

A

SIZE 8 VERTICAL MODJACK ASSEMBLIES

%-NOT TOOLED

ASSEMBLY
ITEM
NUMBER

EXTERNAL
CONNECTOR
SIZE

NUMBER
OF
POSITIONS

P.C.
BOARD
THICKNESS

KEYING
OPTION

MOUNTING
EARS
OPTION

TERMINAL
PLATING
OPTION

42410-8312

8 POS. BODY

8

.062/(1.57)

NO

YES

A

42410-8314

↑

↑

.062/(1.57)

NO

NO

A

42410-8360

↑

↑

.062/(1.57)

YES

YES

A

42410-8362

↑

↑

.062/(1.57)

YES

NO

A

42410-8504

.125/(3.18)

NO

YES

A

42410-8506

.125/(3.18)

NO

NO

A

42410-8552

↓

↓

.125/(3.18)

YES

YES

A

42410-8554

8 POS. BODY

8

.125/(3.18)

YES

NO

A

42410-8600

8 POS. BODY

6

.062/(1.57)

NO

YES

A

42410-8602

↑

↑

.062/(1.57)

NO

NO

A

42410-8648

↑

↑

.062/(1.57)

YES

YES

A

42410-8650

↑

↑

.062/(1.57)

YES

NO

A

42410-8792

.125/(3.18)

NO

YES

A

42410-8794

.125/(3.18)

NO

NO

A

42410-8840

↓

↓

.125/(3.18)

YES

YES

A

42410-8842

8 POS. BODY

6

.125/(3.18)

YES

NO

A

42410-8888

8 POS. BODY

4

.062/(1.57)

NO

YES

A

42410-8890

↑

↑

.062/(1.57)

NO

NO

A

42410-8936

↑

↑

.062/(1.57)

YES

YES

A

42410-8938

↑

↑

.062/(1.57)

YES

NO

A

42410-9080

.125/(3.18)

NO

YES

A

42410-9082

.125/(3.18)

NO

NO

A

42410-9128

↓

↓

.125/(3.18)

YES

YES

A

42410-9130

8 POS. BODY

4

.125/(3.18)

YES

NO

A

42410-9176

8 POS. BODY

2

.062/(1.57)

NO

YES

A

42410-9178

↑

↑

.062/(1.57)

NO

NO

A

42410-9224

↑

↑

.062/(1.57)

YES

YES

A

42410-9226

↑

↑

.062/(1.57)

YES

NO

A

42410-9368

.125/(3.18)

NO

YES

A

42410-9370

.125/(3.18)

NO

NO

A

42410-9416

↓

↓

.125/(3.18)

YES

YES

A

42410-9418

8 POS. BODY

2

.125/(3.18)

YES

NO

A

SEE SHEET ONE

EC NO: UCP2004-167

DRAWN: SCHMIDT 2004/03/03

CHECK: SCHMIDT 2004/03/03

APPROVE: SCHMIDT 2004/03/03

N

QUALITY SYMBOLS

▽.0

▽.0

GENERAL TOLERANCES (UNLESS SPECIFIED)

4 PLACES ± ---

3 PLACES ± ---

2 PLACES ± ---

1 PLACE ± ---

mm

INCH

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE

MUST REMAIN WITHIN DIMENSIONS

SCALE ---

DESIGN UNITS INCH

DIMENSION STYLE IN/MM

DRAWN BY DATE

CHECKED BY DATE

BAP 1990/10/12

APPROVED BY DATE

RAS 1990/10/12

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

THIRD ANGLE PROJECTION

REVISE ON CAD ONLY

ASSEMBLY, VERTICAL MODULAR JACKS

MATERIAL NO. DOCUMENT NO. SHEET NO.

SEE CHART SDA-42410-**** 4 OF 4

D

1b. frame: D.P.M.E.T

Rev. C 2002/05/05

19

18

17

16

15

14

13

12

11

10

9

8

7

6

5

4

3

2

1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.