

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0850420086

Status:

Active

Overview:

din_41612

Description:

2.54mm (.100") Pitch DIN 41612 Receptacle, Style C/2, 48 Circuits

Documents:

3D Model

RoHS Certificate of Compliance (PDF)

Drawing (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Backplane Connectors

Series

85042

Application

Daughtercard

Component Type

PCB Receptacle

Overview

din_41612

Product Name

IEC 603-2/DIN 41612

Style

C/2

Physical

Circuits (Loaded)

48

Circuits (maximum)

48

Circuits Detail

Rows A, B, & C

Durability (mating cycles max)

400

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

No

Keying to Mating Part

Yes

Number of Columns

24

Number of Pairs

Open Pin Field

Number of Rows

3

Orientation

Vertical

PC Tail Length (in)

0.177 In

PC Tail Length (mm)

4.50 mm

PCB Locator

No

PCB Retention

Yes

Packaging Type

Tray

Pitch - Mating Interface (in)

0.100 In

Pitch - Mating Interface (mm)

2.54 mm

Pitch - Term. Interface (in)

0.100 In

Pitch - Term. Interface (mm)

2.54 mm

Polarized to PCB

Yes

Stackable

No

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-55°C to +125°C

Electrical

Current - Maximum per Contact

1A

Data Rate

622.0 Mbps

Real Signals (per 25mm)

29


Shielded

No

Voltage - Maximum

250V AC (RMS)

Material Info

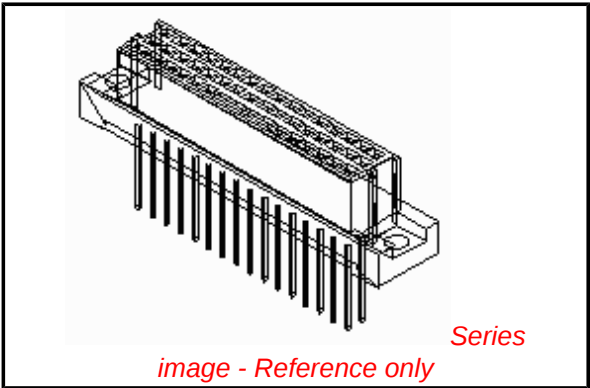

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status

Not Reviewed

Need more information on product
environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

China RoHS



Search Parts in this Series
85042Series

Mates With
DIN 41612 Headers 85003 , 85013







Reference - Drawing Numbers

Sales Drawing

SD-85042-0002, SD-85042-002


This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

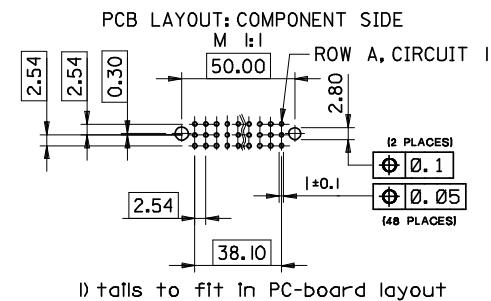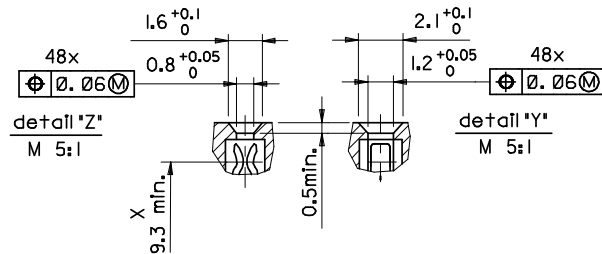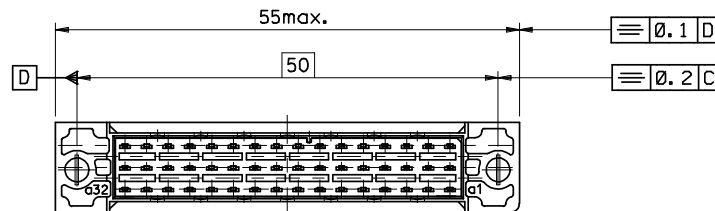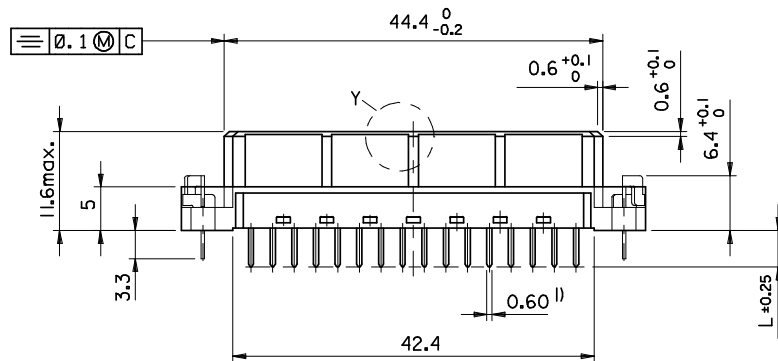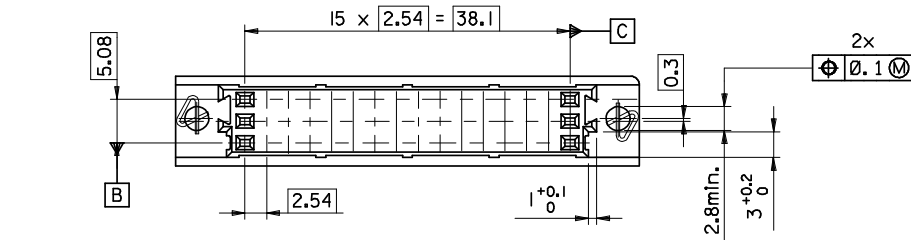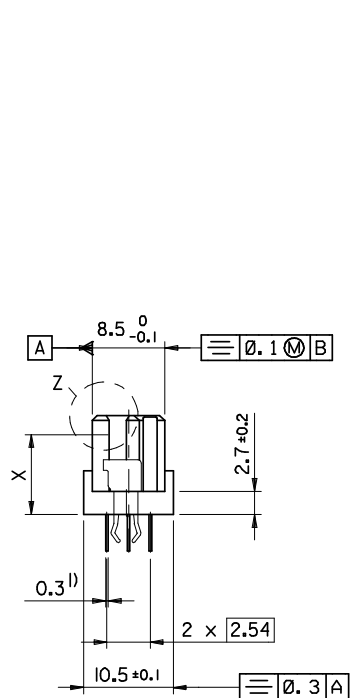

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: 12009-0082		DRAWN BY: SUMESH		DATE: 2008/08/13		MM ONLY		---		METRIC		THIRD ANGLE PROJECTION	
DRWNSJ		CHECKED BY: KPRASAD		DATE: 2008/08/13		DRAWN BY: SUMESH		DATE: 2008/08/13		DESIGN UNITS: METRIC		THIRD ANGLE PROJECTION	
CHKD: KPRASAD		APPROVED BY: KPRASAD		DATE: 2008/08/13		CHECKED BY: KPRASAD		DATE: 2008/08/13		APPROVED BY: KPRASAD		DATE: 2008/08/13	
APPR: KPRASAD		MATERIAL NO. 850426115		DOCUMENT NO. SD-85042-0002		1 PLACE		ANGULAR		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1 OF 1	
REV C		SIZE A2		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		4 PLACES		3 PLACES		2 PLACES		1 PLACE	
DESCRIPTION		mm		INCH		±---		±---		±---		±---	

WITH MOUNTING CLIPS

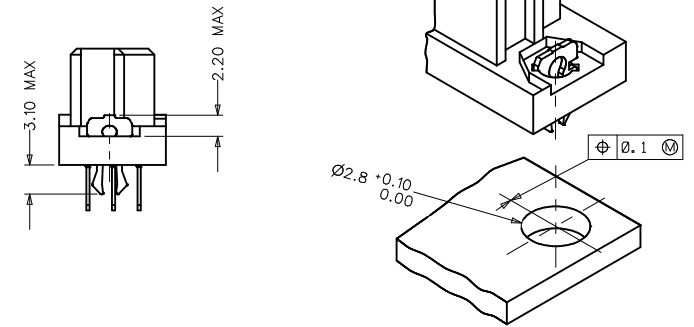



NOTES:

- 1) MATERIALS: THERMOPLASTIC POLYESTER, GLASS FILLED, UL94V-0. COLOUR: PEBBLE GREY RAL 7032
TERMINAL - PHOSPHOR BRONZE
MOUNTING CLIP: STEEL
- 2) FINISH: TERMINAL:-
CONTACT AREA
1. PERFORMANCE LEVEL 1: SELECTIVE GOLD (Au), THICKNESS = 1.1 MICROMETER OVER NICKEL, THICKNESS = 1.5 MICROMETER
2. PERFORMANCE LEVEL 2: SELECTIVE GOLD (Au), THICKNESS = 0.6 MICROMETER OVER NICKEL, THICKNESS = 1.5 MICROMETER
3. PERFORMANCE LEVEL 3: SELECTIVE GOLD (Au), THICKNESS = 0.3 MICROMETER OVER NICKEL, THICKNESS = 1.5 MICROMETER
TERMINATION AREA:
SELECTIVE TIN, THICKNESS = 5 MICROMETER OVER NICKEL, THICKNESS = 1.5 MICROMETER OVERALL
3) MOUNTING CLIP:-
TIN (Sn), THICKNESS = 5-10 MICROMETER, OVER NICKEL (Ni), THICKNESS = 2.5 MICROMETER
4) FOR NON MOUNTING CLIP OPTION, CONNECTOR TO BE SECURED WITH RIVETS: 2 TUBULAR RIVETS 2.5 x 0.3 ... DIN 7340
SCREWS: 2 CHEESEHEAD SCREWS M2.5 x ... DIN 84 AND 2 HEXAGONAL NUTS M2.5 DIN 934
5) MATERIAL No, BATCH CODE, UL AND CSA MARKING TO BE PRINTED ON THE CONNECTOR.
6) CUT FACES OF TIP WITHOUT PLATING PERMITTED.
7) PRODUCT SPECIFICATION PS-85042-0001

RoHS COMPLIANT

ENTER DESCRIPTION EC NO: 12070-0293 DESIGNER: D.D. NARAYAN CHKD: K. PRASAD APPR: K. PRASAD DATE: 2009/12/04 2010/01/17	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				DRAWN BY SHANKAR	DATE 2006/04/25	TITLE ASSY DIN41612 C/2 FEMALE 48 POS 1.0MM PCB DIA				
		4 PLACES ± 0.15 ± 0.005		CHECKED BY SSUDHIR	DATE 2006/04/25	MOLEX INCORPORATED				
		3 PLACES ± 0.1 ± 0.005		APPROVED BY SSUDHIR	DATE 2006/04/25					
		2 PLACES ± 0.1 ± 0.005		MATERIAL NO.		DOCUMENT NO.	SHEET NO.			
		1 PLACE ± 0.15 ± 0.005		SEE SHEET 2		SD-85042-002		1 OF 2		
		ANGULAR ± 2 °		SIZE A1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								

RECOMMENDED PCB LAYOUT COMPONENT SIDE

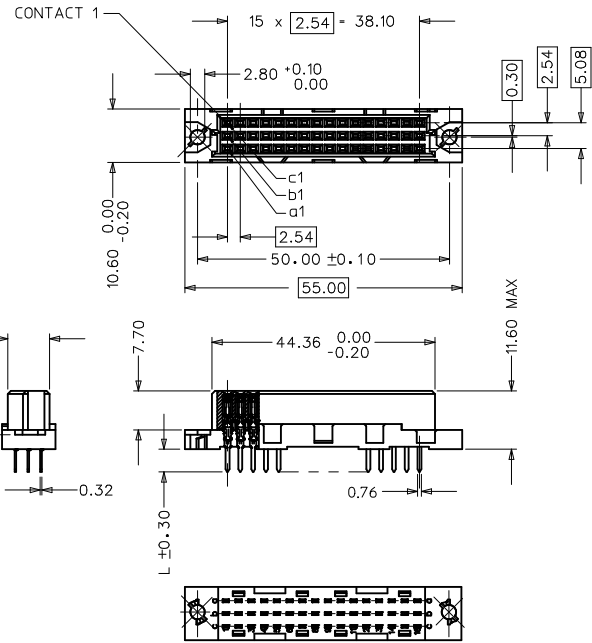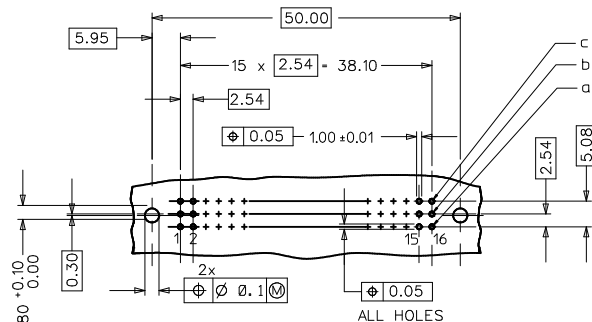

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
M	MATERIAL No	MOLEX ENG No	PERF LEVEL	PLATING	CONTACT SEQUENCE/ROW	DIM "L" mm	MOUNTING CLIP	FLUX PROOF												
	850424294	85042-4294	2	Au+Ni	1,2,3....16 a+b+c	2.9	YES	NO												
	850429025	85042-9025	2	Au+Ni	1,2,3....16 a+b+c	4.5	YES	NO												
	850420048	85042-0048	2	Au+Ni	1,2,3....16 a+c	4.5	NO	NO												
L	850420086	85042-0086	2	Au+Ni	1,2,3....16 a+b+c	4.5	NO	NO												
	850421184	85042-1184	1	Au+Ni	1,2,3....16 a+b+c	2.9	NO	YES												
	850421330	85042-1330	1	Au+Ni	1,2,3....16 a+b+c	4.5	NO	NO												
	850424268	85042-4268	2	Au+Ni	1,2,3....16 a+b+c	2.9	NO	NO												
	850424282	85042-4282	2	Au+Ni	1,2,3....16 a+c	2.9	YES	NO												
K	850426098	85042-6098	3	Au+Ni	1,2,3....16 a+b+c	2.9	NO	NO												
	850429022	85042-9022	2	Au+Ni	1,2,3....16 a+c	2.9	YES	NO												

View on mating side

o	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
d																				
o	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0

View on mating side

o	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
d																				
o	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0

RoHS COMPLIANT

ENTER DESCRIPTION EC NO: 12010-0293 DRAWN BY: DRMNKRUMAR CHKD BY: CHKD KPRASAD APPR: KPRASAD B1	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		4 PLACES	±----	±----	DRAWN BY SHANKAR	DATE 2006/04/25	TITLE ASSY DIN41612 C/2 FEMALE 48 POS 1.0MM PCB DIA			
		3 PLACES	±----	±----	CHECKED BY SSUDHIR	DATE 2006/04/25				
		2 PLACES	±----	±----	APPROVED BY SSUDHIR	DATE 2006/04/25	molex MOLEX INCORPORATED			
		1 PLACE	±----	±----	MATERIAL NO. SD-85042-002					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.