



- Standard bi-polarized series for entertainment electronics.
- Compliant to the RoHS directive (2011/65/EU).



Specifications

| Item | Performance Characteristics | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|--|--------------------|--|-------|---|-----------------|---|------|-----|-----|--------------|-----------------|-----------------|------|------|------|------|------|------|---|---|-----------------|----|---|---|---|---|---|---|---|
| Category Temperature Range | -40 to +85°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated Voltage Range | 6.3 to 100V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated Capacitance Range | 0.47 to 6800µF | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current | After 5 minutes' application of rated voltage at 20°C, leakage current is not more than 0.03CV or 3 (µA), whichever is greater. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Tangent of loss angle (tan δ) | For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. Measurement frequency : 120Hz at 20°C <table border="1"> <tr> <td>Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.26</td> <td>0.24</td> <td>0.22</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </table> | Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | tan δ (MAX.) | 0.26 | 0.24 | 0.22 | 0.20 | 0.16 | 0.14 | 0.12 | 0.10 | | | | | | | | | | | |
| Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | | | | | | | | | | | | | | | | | | | | | | |
| tan δ (MAX.) | 0.26 | 0.24 | 0.22 | 0.20 | 0.16 | 0.14 | 0.12 | 0.10 | | | | | | | | | | | | | | | | | | | | | | |
| Stability at Low Temperature | Measurement frequency : 120Hz <table border="1"> <tr> <td colspan="2">Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td rowspan="2">Impedance ratio</td> <td>Z-25°C / Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z20 (MAX.)</td> <td>10</td> <td>8</td> <td>6</td> <td>5</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table> | Rated voltage (V) | | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | Impedance ratio | Z-25°C / Z+20°C | 4 | 3 | 2 | 2 | 2 | 2 | 2 | 2 | ZT / Z20 (MAX.) | 10 | 8 | 6 | 5 | 4 | 4 | 3 | 3 |
| Rated voltage (V) | | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 100 | | | | | | | | | | | | | | | | | | | | | |
| Impedance ratio | Z-25°C / Z+20°C | 4 | 3 | 2 | 2 | 2 | 2 | 2 | 2 | | | | | | | | | | | | | | | | | | | | | |
| | ZT / Z20 (MAX.) | 10 | 8 | 6 | 5 | 4 | 4 | 3 | 3 | | | | | | | | | | | | | | | | | | | | | |
| Endurance | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C with the polarity inverted every 250 hours. <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table> | Capacitance change | Within ±20% of the initial capacitance value | tan δ | 200% or less than the initial specified value | Leakage current | Less than or equal to the initial specified value | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance change | Within ±20% of the initial capacitance value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| tan δ | 200% or less than the initial specified value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Leakage current | Less than or equal to the initial specified value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shelf Life | After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Marking | Printed with white color letter on black sleeve. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


Radial Lead Type



| α | | (mm) | | | | | | | |
|----|----------|------|-----|-----|-----|------|-----|-----|--|
| α | (L < 20) | 1.5 | | | | | | | |
| | (L ≥ 20) | 2.0 | | | | | | | |
| φD | | 5 | 6.3 | 8 | 10 | 12.5 | 16 | 18 | |
| P | | 2.0 | 2.5 | 3.5 | 5.0 | 5.0 | 7.5 | 7.5 | |
| φd | | 0.5 | 0.5 | 0.6 | 0.6 | 0.6 | 0.8 | 0.8 | |

• Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 10V 47µF)

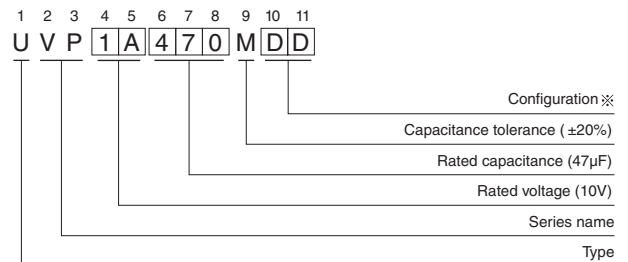

※ Configuration

| φ D | Pb-free leadwire Pb-free PET sleeve |
|------------|--|
| 5 | DD |
| 6.3 | ED |
| 8 · 10 | PD |
| 12.5 to 18 | HD |

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

■ Dimensions

| Cap. (μF) | V Code | 6.3 | | 10 | | 16 | | 25 | | 35 | | 50 | | 63 | | 100 | | |
|-----------|-----------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|--------|-----------|--------|-----------|----------|-----------|----------|----|
| | | 0J | | 1A | | 1C | | 1E | | 1V | | 1H | | 1J | | 2A | | |
| 0.47 | R47 | | | | | | | | | | | 5 × 11 | 11 | | | 5 × 11 | 14 | |
| 1 | 010 | | | | | | | | | | | 5 × 11 | 17 | | | 5 × 11 | 21 | |
| 2.2 | 2R2 | | | | | | | | | | | 5 × 11 | 25 | | | 6.3 × 11 | 34 | |
| 3.3 | 3R3 | | | | | | | | | | | 5 × 11 | 27 | 5 × 11 | 28 | 6.3 × 11 | 39 | |
| 4.7 | 4R7 | | | | | | | | | | 5 × 11 | 34 | 5 × 11 | 34 | 6.3 × 11 | 34 | 6.3 × 11 | 47 |
| 10 | 100 | | | | | 5 × 11 | 42 | 5 × 11 | 42 | 5 × 11 | 43 | 6.3 × 11 | 52 | 6.3 × 11 | 57 | 8 × 11.5 | 71 | |
| 22 | 220 | | | 5 × 11 | 57 | 5 × 11 | 57 | 6.3 × 11 | 65 | 6.3 × 11 | 73 | 8 × 11.5 | 89 | 8 × 11.5 | 95 | 10 × 16 | 135 | |
| 33 | 330 | 5 × 11 | 64 | 5 × 11 | 64 | 5 × 11 | 70 | 6.3 × 11 | 80 | 8 × 11.5 | 100 | 8 × 11.5 | 105 | 10 × 12.5 | 135 | 12.5 × 20 | 220 | |
| 47 | 470 | 5 × 11 | 76 | 5 × 11 | 76 | 6.3 × 11 | 95 | 6.3 × 11 | 95 | 8 × 11.5 | 120 | 10 × 12.5 | 150 | 10 × 16 | 180 | 12.5 × 20 | 240 | |
| 100 | 101 | 6.3 × 11 | 125 | 6.3 × 11 | 125 | 8 × 11.5 | 160 | 8 × 11.5 | 160 | 10 × 16 | 230 | 10 × 20 | 265 | 12.5 × 20 | 320 | 16 × 25 | 425 | |
| 220 | 221 | 8 × 11.5 | 215 | 8 × 11.5 | 215 | 10 × 12.5 | 275 | 10 × 16 | 305 | 12.5 × 20 | 410 | 12.5 × 25 | 480 | 16 × 25 | 575 | 18 × 35.5 | 720 | |
| 330 | 331 | 8 × 11.5 | 265 | 10 × 16 | 345 | 10 × 16 | 375 | 12.5 × 20 | 450 | 12.5 × 20 | 505 | 16 × 25 | 650 | 16 × 31.5 | 655 | | | |
| 470 | 471 | 10 × 12.5 | 370 | 10 × 16 | 410 | 10 × 20 | 485 | 12.5 × 20 | 540 | 12.5 × 25 | 655 | 16 × 31.5 | 835 | 18 × 35.5 | 965 | | | |
| 1000 | 102 | 10 × 20 | 650 | 12.5 × 20 | 720 | 12.5 × 25 | 855 | 16 × 25 | 950 | 16 × 31.5 | 1140 | | | | | | | |
| 2200 | 222 | 12.5 × 25 | 1160 | 16 × 25 | 1280 | 16 × 31.5 | 1510 | 18 × 35.5 | 1620 | | | | | | | | | |
| 3300 | 332 | 16 × 25 | 1570 | 16 × 31.5 | 1690 | 18 × 35.5 | 1980 | | | | | | | | | | | |
| 4700 | 472 | 16 × 31.5 | 2020 | 18 × 35.5 | 2160 | | | | | | | | | | | | | |
| 6800 | 682 | 18 × 35.5 | 2600 | | | | | | | | | | | | | | | |

Rated ripple current (mA_{rms}) at 85°C 120Hz

● Frequency coefficient of rated ripple current

| Cap. (μF) | Frequency | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10 kHz or more |
|--------------|-----------|-------|--------|--------|-------|----------------|
| 0.47 to 47 | | 0.75 | 1.00 | 1.35 | 1.57 | 2.00 |
| 100 to 470 | | 0.80 | 1.00 | 1.23 | 1.34 | 1.50 |
| 1000 to 6800 | | 0.85 | 1.00 | 1.10 | 1.13 | 1.15 |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.