

## NPN-SWITCHING SILICON TRANSISTOR

Qualified per MIL-PRF-19500/251

### DEVICES

|                 |                 |
|-----------------|-----------------|
| <b>2N2218</b>   | <b>2N2219</b>   |
| <b>2N2218A</b>  | <b>2N2219A</b>  |
| <b>2N2218AL</b> | <b>2N2219AL</b> |

### LEVELS

**JAN**  
**JANTX**  
**JANTXV**  
**JANS \***

\* Also available in Radiation Hardened versions. See datasheet for JANSR2N2218 & JANSR2N2219

### ABSOLUTE MAXIMUM RATINGS ( $T_C = +25^\circ\text{C}$ unless otherwise noted)

| Parameters / Test Conditions             | Symbol            | 2N2218<br>2N2219            | 2N221A; L<br>2N2219A; L | Unit             |
|--|-------------------|-----------------------------|-------------------------|------------------|
| Collector-Emitter Voltage                | $V_{CEO}$         | 30                          | 50                      | Vdc              |
| Collector-Base Voltage                   | $V_{CBO}$         | 60                          | 75                      | Vdc              |
| Emitter-Base Voltage                     | $V_{EBO}$         | 5.0                         | 6.0                     | Vdc              |
| Collector Current                        | $I_C$             | 800                         |                         | mA               |
| Total Power Dissipation                  | $P_T$             | @ $T_A = +25^\circ\text{C}$ | 0.8                     | W                |
|  |                   | @ $T_C = +25^\circ\text{C}$ | 3.0                     | W                |
| Operating & Storage Junction Temp. Range | $T_{op}, T_{stg}$ | -55 to +200                 |                         | $^\circ\text{C}$ |

### THERMAL CHARACTERISTICS

| Parameters / Test Conditions         | Symbol          | Value | Unit                      |
|--------------------------------------|-----------------|-------|---------------------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 59    | $^\circ\text{C}/\text{W}$ |

**Note:** (1) Derate linearly 4.6mW/ $^\circ\text{C}$  above  $T_A > +25^\circ\text{C}$   
 (2) Derate linearly 17.0mW/ $^\circ\text{C}$  above  $T_C > +25^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_A = +25^\circ\text{C}$ , unless otherwise noted)

| Parameters / Test Conditions                               | Symbol        | Min. | Max. | Unit           |
|--|---------------|------|------|----------------|
| <b>OFF CHARACTERISTICS</b>                                 |               |      |      |                |
| Collector-Emitter Breakdown Voltage<br>$I_E = 10\text{mA}$ | $V_{(BR)CEO}$ | 30   | 50   | Vdc            |
| 2N2218; 2N2219<br>2N2218A; 2N2219A / AL                    |               |      |      |                |
| Emitter-Base Cutoff Current<br>$V_{EB} = 5.0\text{Vdc}$    | $I_{EBO}$     |      | 10   | $\mu\text{A}$  |
| $V_{EB} = 6.0\text{Vdc}$                                   |               |      | 10   | $\eta\text{A}$ |
| $V_{EB} = 4.0\text{Vdc}$                                   |               |      | 10   |                |
| Collector-Base Cutoff Current<br>$V_{CE} = 30\text{Vdc}$   | $I_{CES}$     |      | 10   | $\eta\text{A}$ |
| $V_{CE} = 50\text{Vdc}$                                    |               |      | 10   |                |



**TO-39 (TO-205AD)**  
 2N2218, 2N2218A  
 2N2219, 2N2219A



**TO-5**  
 2N2218AL  
 2N2219AL

**ELECTRICAL CHARACTERISTICS ( $T_A = +25^\circ\text{C}$ , unless otherwise noted) (Con't)**

| Parameters / Test Conditions   | Symbol    | Min.                  | Max.                     | Unit             |     |
|--|-----------|-----------------------|--------------------------|------------------|-----|
| Collector-Base Cutoff Current  |           |                       |                          |                  |     |
| $V_{CB} = 50\text{Vdc}$<br>2N2218; 2N2219  | $I_{CBO}$ |                       | 10                       | $\eta\text{Adc}$ |     |
| $V_{CB} = 60\text{Vdc}$<br>2N2218; 2N2219  |           |                       | 10                       | $\mu\text{Adc}$  |     |
| $V_{CB} = 60\text{Vdc}$<br>2N2218A; 2N2219A / AL   |           |                       | 10                       | $\eta\text{Adc}$ |     |
| $V_{CB} = 75\text{Vdc}$<br>2N2218A; 2N2219A / AL   |           |                       | 10                       | $\mu\text{Adc}$  |     |
| <b>ON CHARACTERISTICS (3)</b>  |           |                       |                          |                  |     |
| Forward-Current Transfer Ratio   |           |                       |                          |                  |     |
| $I_C = 0.1\text{mA}$ , $V_{CE} = 10\text{Vdc}$<br>2N2218<br>2N2219<br>2N2218A; 2N2218AL<br>2N2219A; 2N2219AL | $h_{FE}$  | 20<br>35<br>30<br>50  |                          |                  |     |
| $I_C = 1.0\text{mA}$ , $V_{CE} = 10\text{Vdc}$<br>2N2218<br>2N2219<br>2N2218A; 2N2218AL<br>2N2219A; 2N2219AL |           | 25<br>50<br>35<br>75  | 150<br>325<br>150<br>325 |                  |     |
| $I_C = 10\text{mA}$ , $V_{CE} = 10\text{Vdc}$<br>2N2218<br>2N2219<br>2N2218A; 2N2218AL<br>2N2219A; 2N2219AL  |           | 35<br>75<br>40<br>100 |                          |                  |     |
| $I_C = 150\text{mA}$ , $V_{CE} = 10\text{Vdc}$<br>2N2218; A; AL<br>2N2219; A; AL                             |           | 40<br>100             | 120<br>300               |                  |     |
| $I_C = 500\text{mA}$ , $V_{CE} = 10\text{Vdc}$<br>2N2218; A; AL<br>2N2219; A; AL                             |           | 20<br>30              |                          |                  |     |
| Collector-Emitter Saturation Voltage   |           |                       |                          |                  |     |
| $I_C = 150\text{mA}$ , $I_B = 15\text{mA}$<br>2N2218; 2N2219<br>2N2218A; 2N2219A / AL                        |           | $V_{CE(sat)}$         |                          | 0.4<br>0.3       | Vdc |
| $I_C = 500\text{mA}$ , $I_B = 50\text{mA}$<br>2N2218; 2N2219<br>2N2218A; 2N2219A / AL                        |           |                       |                          | 1.6<br>1.0       |     |
| Base-Emitter Saturation Voltage  |           |                       |                          |                  |     |
| $I_C = 150\text{mA}$ , $I_B = 15\text{mA}$<br>2N2218; 2N2219<br>2N2218A; 2N2219A / AL                        |           | $V_{BE(sat)}$         | 0.6<br>0.6               | 1.3<br>1.2       | Vdc |
| $I_C = 500\text{mA}$ , $I_B = 50\text{mA}$<br>2N2218; 2N2219<br>2N2218A; 2N2219A / AL                        |           |                       |                          | 2.6<br>2.0       |     |

## DYNAMIC CHARACTERISTICS


| Parameters / Test Conditions  | Symbol     | Min.        | Max. | Unit |
|---|------------|-------------|------|------|
| Magnitude of Small-Signal Forward Current Transfer Ratio<br>$I_C = 20\text{mA}$ , $V_{CE} = 20\text{V}$ , $f = 100\text{MHz}$ | $ h_{fe} $ | 2.5         | 12   |      |
| Small-Signal Forward Current Transfer Ratio<br>$I_C = 1.0\text{mA}$ , $V_{CE} = 10\text{V}$ , $f = 1.0\text{kHz}$             | $h_{fe}$   | 2N2218      | 25   |      |
|   |            | 2N2219      | 50   |      |
|   |            | 2N2218A, AL | 35   |      |
|   |            | 2N2219A, AL | 75   |      |
| Output Capacitance<br>$V_{CB} = 10\text{V}$ , $I_E = 0$ , $100\text{kHz} \leq f \leq 1.0\text{MHz}$                           | $C_{obo}$  |             | 8.0  | pF   |
| Input Capacitance<br>$V_{EB} = 0.5\text{V}$ , $I_C = 0$ , $100\text{kHz} \leq f \leq 1.0\text{MHz}$                           | $C_{ibo}$  |             | 25   | pF   |

## SWITCHING CHARACTERISTICS

| Parameters / Test Conditions  | Symbol    | Min.                  | Max. | Unit           |
|---|-----------|-----------------------|------|----------------|
| $V_{CC} = 30\text{V}$ ; $I_C = 150\text{mA}$ ; $I_{B1} = 15\text{mA}$ |           |                       |      |                |
| Turn-On Time<br>(See Figure 3 of MIL-PRF-19500/251)                   | $t_{on}$  | 2N2218, 2N2219        | 40   | $\eta\text{s}$ |
|   |           | 2N2218A, 2N2219A / AL | 35   |                |
| Turn-Off Time<br>(See Figure 4 of MIL-PRF-19500/251)                  | $t_{off}$ | 2N2218, 2N2219        | 250  | $\eta\text{s}$ |
|   |           | 2N2218A, 2N2219A / AL | 300  |                |

(3) Pulse Test: Pulse Width = 300 $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

## PACKAGE DIMENSIONS

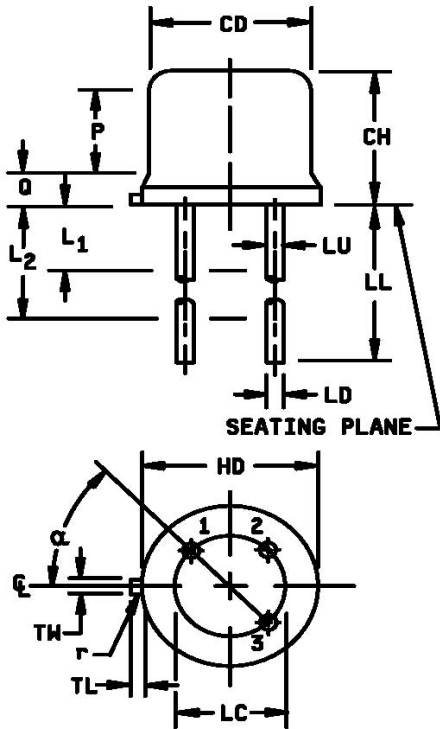

| Symbol         | Dimensions  |      |             |      | Notes |
|----------------|-------------|------|-------------|------|-------|
|                | Inches      |      | Millimeters |      |       |
|                | Min         | Max  | Min         | Max  |       |
| CD             | .305        | .335 | 7.75        | 8.51 |       |
| CH             | .240        | .260 | 6.10        | 6.60 |       |
| HD             | .335        | .370 | 8.51        | 9.40 |       |
| LC             | .200 TP     |      | 5.08 TP     |      | 7     |
| LD             | .016        | .019 | 0.41        | 0.48 | 8, 9  |
| LL             | See note 14 |      |             |      |       |
| LU             | .016        | .019 | 0.41        | 0.48 | 8, 9  |
| L <sub>1</sub> |             | .050 |             | 1.27 | 8, 9  |
| L <sub>2</sub> | .250        |      | 6.35        |      | 8, 9  |
| P              | .100        |      | 2.54        |      | 7     |
| Q              |             | .030 |             | 0.76 | 5     |
| TL             | .029        | .045 | 0.74        | 1.14 | 3, 4  |
| TW             | .028        | .034 | 0.71        | 0.86 | 3     |
| r              |             | .010 |             | 0.25 | 10    |
| α              | 45° TP      |      | 45° TP      |      | 7     |

**NOTES:**

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Beyond r (radius) maximum, TW shall be held for a minimum length of .011 (0.28 mm).
4. Dimension TL measured from maximum HD.
5. Body contour optional within zone defined by HD, CD, and Q.
6. CD shall not vary more than .010 inch (0.25 mm) in zone P. This zone is controlled for automatic handling.
7. Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC.
8. Dimension LU applies between L1 and L2. Dimension LD applies between L2 and LL minimum. Diameter is uncontrolled in L1 and beyond LL minimum.
9. All three leads.
10. The collector shall be internally connected to the case.
11. Dimension r (radius) applies to both inside corners of tab.
12. In accordance with ASME Y14.5M, diameters are equivalent to φx symbology.
13. Lead 1 = emitter, lead 2 = base, lead 3 = collector.
14. For L suffix devices (TO-5), dimension LL = 1.5 inches (38.10 mm) min. and 1.75 inches (44.45 mm) max. For non-L suffix types (TO-39), dimension LL = .5 inch (12.70 mm) min. and .750 inch (19.05 mm) max.

**FIGURE 1.** Physical dimensions (similar to TO-39, TO-5).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.