

**SXG** SERIES

**UPGRADE**

**105°C Overvoltage Venting Specification, Miniaturized**

- Load Life : 105°C 2000 hours.
- This series has specification of vent operation in overvoltage situation. Please consult us for any further details.

RoHS compliance



**◆SPECIFICATIONS**

Items	Characteristics								
Category Temperature Range	-25~+105°C								
Rated Voltage Range	200~450Vdc								
Capacitance Tolerance	±20%(20°C,120Hz)								
Leakage Current(MAX)	$I=3\sqrt{CV}$ (After 5 minutes application of rated voltage) $I$ =Leakage Current( $\mu$ A) $C$ =Capacitance( $\mu$ F) $V$ =Rated Voltage(Vdc)								
Dissipation Factor(MAX) (tan $\delta$ )	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>200~400</td> <td>450</td> <td>(20°C,120Hz)</td> </tr> <tr> <td>tan<math>\delta</math></td> <td>0.15</td> <td>0.20</td> <td></td> </tr> </table>	Rated Voltage (Vdc)	200~400	450	(20°C,120Hz)	tan $\delta$	0.15	0.20	
Rated Voltage (Vdc)	200~400	450	(20°C,120Hz)						
tan $\delta$	0.15	0.20							
Endurance	<p>After applying rated voltage with rated ripple current for 2000 hours at 105°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>	Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.		
Capacitance Change	Within ±20% of the initial value.								
Dissipation Factor	Not more than 200% of the specified value.								
Leakage Current	Not more than the specified value.								
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>200, 250</td> <td>400, 450</td> <td>(120Hz)</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>3</td> <td>8</td> <td></td> </tr> </table>	Rated Voltage (Vdc)	200, 250	400, 450	(120Hz)	Z(-25°C)/Z(20°C)	3	8	
Rated Voltage (Vdc)	200, 250	400, 450	(120Hz)						
Z(-25°C)/Z(20°C)	3	8							

**◆MULTIPLIER FOR RIPPLE CURRENT**

Frequency (Hz)	60(50)	120(100)	500	1k	10k $\leq$
Coefficient	0.77	1.00	1.17	1.22	1.40

**◆OPTION**


	Code
PET Sleeve without plate	EFC

**◆PART NUMBER**

□□□      SXG      □□□□□      M      □□□      SN      D×L  
 Rated Voltage      Series      Capacitance      Capacitance Tolerance      Option      Terminal Code      Case Size

**◆DIMENSIONS**

(mm)

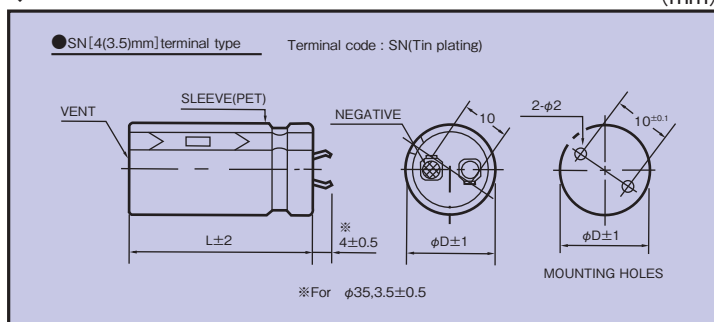

**◆STANDARD SIZE**

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L (mm)	Rated Ripple Current (A r.m.s., 105°C,120Hz)
200	150	20×20	0.66
	180	20×25	0.82
	180	22×20	0.80
	220	20×25	0.95
	220	22×25	1.00
	220	25×20	0.87
	270	20×30	1.10
	270	22×25	1.10
	270	25×20	0.95
	330	20×35	1.20
	330	22×30	1.25
	330	25×25	1.20
	330	30×20	1.15
	390	20×40	1.31
	390	22×30	1.31
	390	25×25	1.31
	390	30×20	1.25
	470	22×35	1.45
	470	25×30	1.45
	470	30×25	1.45
	560	22×40	1.60
	560	25×30	1.60
	560	30×25	1.60
	680	25×35	1.78
	680	30×30	1.78
	820	25×40	1.95
	820	30×35	2.11
	1000	30×35	2.40
1200	30×40	2.65	
1500	35×45	2.70	
250	270	25×30	1.15
	330	25×30	1.26
	390	30×25	1.42
	470	30×30	1.61
	470	35×25	1.61
	560	30×35	1.84
	560	35×30	1.84
	680	35×30	1.96
	820	35×35	2.26
	400	39	20×20
47		20×20	0.40
56		20×25	0.45
56		22×20	0.40
68		20×25	0.49
68		22×25	0.52
68		25×20	0.49
82		20×30	0.64
82		22×25	0.64
82		25×20	0.60
100		20×35	0.70
100		22×30	0.70
100		25×25	0.70
100		30×20	0.60

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L (mm)	Rated Ripple Current (A r.m.s., 105°C,120Hz)	
400	120	20×40	0.75	
	120	22×30	0.75	
	120	25×25	0.75	
	120	30×20	0.70	
	150	22×35	0.88	
	150	25×30	0.88	
	150	30×25	0.85	
	150	35×20	0.80	
	180	22×40	0.95	
	180	25×30	0.95	
	180	30×25	0.95	
	180	35×25	0.95	
	220	25×35	1.10	
	220	30×30	1.10	
	220	35×25	1.10	
	270	25×40	1.22	
	270	30×30	1.22	
	270	35×25	1.22	
	330	30×35	1.44	
	330	35×30	1.44	
	390	30×40	1.55	
	390	35×35	1.60	
	470	35×40	1.90	
	450	47	22×20	0.35
		47	22×25	0.35
		56	22×25	0.44
		68	22×30	0.53
		68	25×25	0.53
82		22×35	0.64	
82		25×25	0.64	
100		22×40	0.69	
100		25×30	0.69	
100		30×25	0.69	
120		22×45	0.75	
120		25×35	0.75	
120		30×25	0.75	
150		22×50	0.88	
150		25×40	0.88	
150		30×30	0.88	
150		35×25	0.80	
180		25×45	0.98	
180		30×30	0.98	
180		35×25	0.98	
220		25×50	1.10	
220		30×35	1.10	
220		35×30	1.10	
270		30×35	1.28	
270		30×40	1.28	
270		35×35	1.28	
330		30×50	1.45	
330		35×35	1.45	
330	35×40	1.45		
390	35×40	1.60		
470	35×50	1.85		

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Rubycon:

[450SXG220MEFCSN35X30](#) [400SXG100MEFCSN30X20](#) [450SXG56MEFCSN22X25](#) [250SXG470MEFCSN30X30](#)  
[400SXG68MEFCSN20X25](#) [400SXG68MEFCSN25X20](#) [250SXG820MEFCSN35X35](#) [450SXG68MEFCSN25X25](#)  
[400SXG82MEFCSN22X25](#) [450SXG100MEFCSN22X40](#) [400SXG47MEFCSN20X20](#) [450SXG100MEFCSN30X25](#)  
[200SXG220MEFCSN22X25](#) [450SXG150MEFCSN30X30](#) [400SXG150MEFCSN35X20](#) [450SXG82MEFCSN25X25](#)  
[200SXG150MEFCSN20X20](#) [450SXG180MEFCSN25X45](#) [450SXG220MEFCSN25X50](#) [450SXG270MEFCSN35X35](#)  
[450SXG120MEFCSN22X45](#) [450SXG330MEFCSN30X50](#) [450SXG47MEFCSN22X25](#) [400SXG120MEFCSN30X20](#)  
[450SXG100MEFCSN25X30](#) [200SXG330MEFCSN30X20](#) [450SXG68MEFCSN22X30](#) [450SXG150MEFCSN35X25](#)  
[400SXG82MEFCSN20X30](#) [450SXG47MEFCSN22X20](#) [250SXG680MEFCSN35X30](#) [450SXG120MEFCSN30X25](#)  
[400SXG82MEFCSN25X20](#) [200SXG270MEFCSN25X20](#) [400SXG39MEFCSN20X20](#) [450SXG150MEFCSN22X50](#)  
[450SXG330MEFCSN35X40](#) [250SXG390MEFCSN30X25](#) [250SXG470MEFCSN35X25](#) [450SXG82MEFCSN22X35](#)  
[250SXG330MEFCSN25X30](#) [400SXG56MEFCSN20X25](#) [200SXG180MEFCSN22X20](#) [200SXG180MEFCSN20X25](#)  
[200SXG1500MEFCSN35X45](#) [200SXG220MEFCSN25X20](#) [400SXG68MEFCSN22X25](#) [400SXG56MEFCSN22X20](#)  
[400SXG180MEFCSN25X30](#) [450SXG150MEFCSN25X40](#) [200SXG390MEFCSN30X20](#) [200SXG1000MEFCSN30X35](#)  
[450SXG220MEFCSN30X35](#) [450SXG270MEFCSN30X35](#) [450SXG270MEFCSN30X40](#) [450SXG330MEFCSN35X35](#)  
[450SXG390MEFCSN35X40](#) [450SXG470MEFCSN35X50](#) [450SXG120MEFCSN25X35](#) [450SXG180MEFCSN30X30](#)  
[450SXG180MEFCSN35X25](#) [400SXG330MEFCSN35X30](#) [400SXG390MEFCSN30X40](#) [400SXG390MEFCSN35X35](#)  
[400SXG470MEFCSN35X40](#) [400SXG220MEFCSN30X30](#) [400SXG220MEFCSN35X25](#) [400SXG270MEFCSN25X40](#)  
[400SXG270MEFCSN30X30](#) [400SXG270MEFCSN35X25](#) [400SXG330MEFCSN30X35](#) [400SXG150MEFCSN25X30](#)  
[400SXG150MEFCSN30X25](#) [400SXG180MEFCSN22X40](#) [400SXG180MEFCSN30X25](#) [400SXG180MEFCSN35X25](#)  
[400SXG220MEFCSN25X35](#) [400SXG100MEFCSN22X30](#) [400SXG100MEFCSN25X25](#) [400SXG120MEFCSN20X40](#)  
[400SXG120MEFCSN22X30](#) [400SXG120MEFCSN25X25](#) [400SXG150MEFCSN22X35](#) [200SXG820MEFCSN25X40](#)  
[200SXG820MEFCSN30X35](#) [250SXG270MEFCSN25X30](#) [250SXG560MEFCSN30X35](#) [250SXG560MEFCSN35X30](#)  
[400SXG100MEFCSN20X35](#) [200SXG470MEFCSN30X25](#) [200SXG560MEFCSN22X40](#) [200SXG560MEFCSN25X30](#)  
[200SXG560MEFCSN30X25](#) [200SXG680MEFCSN25X35](#) [200SXG680MEFCSN30X30](#) [200SXG330MEFCSN25X25](#)  
[200SXG390MEFCSN20X40](#) [200SXG390MEFCSN22X30](#) [200SXG390MEFCSN25X25](#) [200SXG470MEFCSN22X35](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.