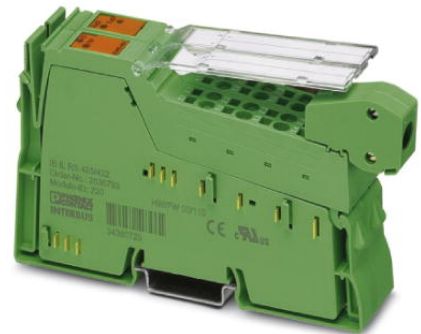



IB IL RS 485/422-PAC

Order No.: 2861933

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2861933>

Inline RS-485/422 function terminal block, complete with accessories
(connector and labeling field), 1 serial input and output channel

Commercial data

GTIN (EAN)	 4 017918 894627
sales group	K413
Pack	1 pcs.
Customs tariff	85389091
Catalog page information	Page 297 (AX-2009)

Product notes

WEEE/RoHS-compliant since:
07/21/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Product description

The IB IL RS 485/422 INTERBUS Inline function terminal with standard interface RS-485/ 422 is a communications terminal which allows intelligent I/O devices with a corresponding serial interface to operate on the INTERBUS system.

During data transmission, you can choose between two different protocols and two different operating modes. If only one I/O device is connected, the full duplex mode (RS-422) must be set. In the half duplex mode an RS-485 network can be established.

The terminal block is configured through INTERBUS. Two words are available for each input parameter and output parameter data in the PCP channel. Parity, data bits and stop bits and a transmission speed up to 19200 baud can be configured.

The terminal block also has a process data input word (status word) and output word (control word). The transmitted data is temporarily stored in a 1 Kbyte buffer and the received data in a 4 kbyte buffer.

To guarantee data exchange, a software handshake can be programmed for the mutual signaling of "clear to send" and "clear to receive".

The INTERBUS Inline function terminals can be labeled using hinged labeling fields. The fields have insert cards that can be labeled individually to suit the application. Additionally, there is the ZBFM-6... Zack strip for labeling the terminal points.

Technical data

Interfaces

Interface	Inline local bus
Type of connection	Inline data jumper
Transmission speed	500 kBit/s
Interface	Either RS-485 half duplex or RS-422 full duplex (as alternative only)
Type of connection	Spring-cage connection
Transmission speed	110 Bit/s ... 38400 Bit/s (configurable)

Power supply

Typical current consumption	170 mA
I/O voltage	24 V DC (via voltage jumper)
Peripherals voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)

Electrical isolation

Test section	5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	RS-485/422 interface / 7.5 V supply (bus logics) 500 V AC 50 Hz 1 min
	RS-485/422 interface / 24 V supply (I/O) 500 V AC 50 Hz 1 min
	RS-485/422 interface / functional earth ground 500 V AC 50 Hz 1 min
	7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min
	7.5 V supply (bus logics) / functional earth ground 500 V AC 50 Hz 1 min
	24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min

Serial input/output channel

Input buffer	4 kByte
Output buffer	1 kByte
Transmission speed	500 kBit/s
Parity	Even, odd or no parity
Data bits	7 or 8
Stop bits	1 or 2
Transmission type	Transparent mode, end-end mode, dual buffer mode, 3964R, XON/XOFF, Modbus RTU / ASCII

General data

Weight	135 g
Number of connectors	2
Width	24.4 mm
Height	136.8 mm
Depth	71.5 mm

Inline potential routing

Communications power U_L	7.5 V (via voltage jumper)
Current consumption from U_L	Typ. 170 mA
	max. 260 mA (all connections of the serial interface are short-circuited)

Certificates / Approvals



Certification

ABS, BV, CUL, DNV, GL, GOST, LR, UL

Accessories

Item	Designation	Description
0809492	ESL 62X10	Insert strip for laser printer, lettering field: 62 x 10 mm
2727501	IB IL FIELD 2	Labeling field, width: 12.2 mm


Marking

Plug/Adapter


2732664	IB IL AO/CNT-PLSET	Connector set
---------	--------------------	---------------

Diagrams/Drawings


Connection diagram

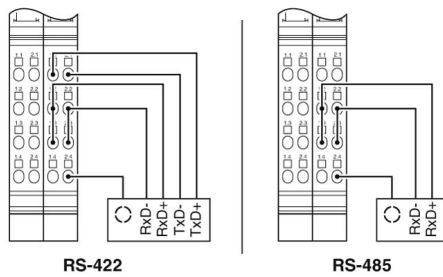

Block diagram

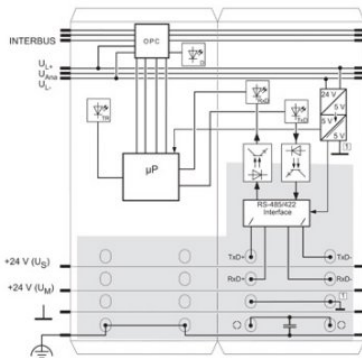

Dimensioned drawing

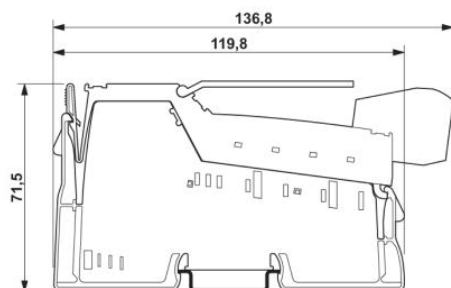

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.