THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
NOMINAL IMPEDANCE (OHMS) 50 ±1	Force to Engage (Lbs MAX) 15	TEMPERATURE RATING -65° TO +165°C
Frequency Range (GHz) DC to 40	Disengage (Lbs) 5.0 MIN	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level 335	Center Contact Retention: N/A	Thermal Shock MIL-STD-202, Method 107, Condition B
VSWR: DC to 18 GHz: 1.20 MAX; 18 to 26.5 GHz: 1.35 MAX; 26.5 to 240 GHz: 1.7 MAX	Cable Retention: Axial: 20 Lbs. Min. Rotational: 16 In. Oz.	Corrosion - MIL-STD-202, Method 101, Condition B
Insertion Loss $.012\sqrt{F}$ GHz (dB min)	Interface per MIL-STD-348A, Figure 326-1a	
Corona, 70,000 Ft (VRMS MIN) 190	DSCC Reference Part Number: 94008ZCG-2	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 500		
Contact Resistance (Milliohms MAX)		
Center Contact 6.0		
Outer Contact 2.0		
Cable to Housing 0.5		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 325		
I.R.(Megohms MIN) 5,000		

DESIGNED FOR USE WITH ø.047 [1.19] SEMI-RIGID CABLE	
CABLE ENTRY DIAMETER MINIMUM	
HOUSING	.050 [1.27]
CONTACT	.015 [0.38]

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REV PER ECO 17-008740	7-19-17	E	CT

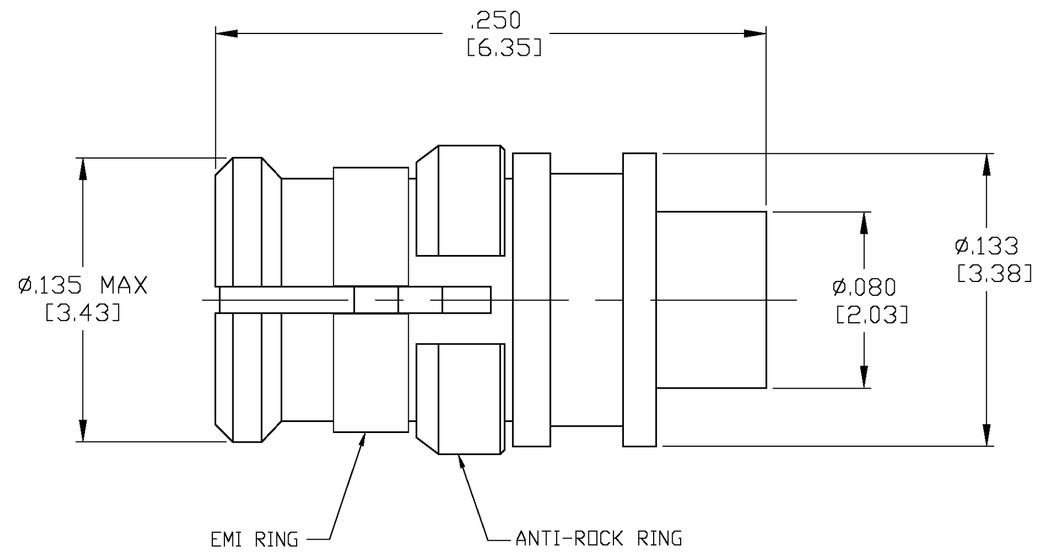

COMPONENT	MATERIAL	FINISH
HOUSING CENTER CONTACT ANTI-ROCK RING EMI RING	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER ASTM-B-488
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A

1056521

1056521-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005 [0.13]
4 PLC ± -
ANGLES ± -

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN C.C.THOMAS 19-APR-05
CHK R.GROSS 20-APR-05
APVD R.GROSS 20-APR-05
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT 0.000000

TE Connectivity

NAME: OSMP STRAIGHT CABLE JACK DIRECT SOLDER ATTACHMENT —

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1056521	—

CUSTOMER DRAWING | SCALE 20:1 | SHEET 1 OF 1 | REV E

1471-9 (1/15)

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.

Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.