

11mm Snap-In, Insulated and Metal Shaft

Application

- ✓ TV/Video, Audio, Home appliance, Musical instrument

Feature

- ✓ Closed structure helps reducing dust



■Specification

Total Rotational Angle	300±5°
Maximum Operating Voltage	50V AC, 20V DC (RV110TF series is designed for AC voltage only)
Insulation Resistance	100MΩ at DC500V
Dielectric Strength	AC300V for 1 minute
Rotational Torque	20-200 gf.cm (RV110F-40B1: 10-200 gf.cm)
Click Torque	Rotational torque + 20-200 gf.cm (RV110F-40B1: Rotational torque + 10-200 gf.cm)
Rotational Stop Strength of the Shaft	With bushing: 5 kgf.cm min; without bushing: 4kgf.cm min
Push/Pull Strength of the Shaft	6kgf for 3 sec
Rotation Life	15,000 cycles

■How to order

RV110F-20 – 15A - B10K - 0C

[Model](#)

[Shaft Type](#)

Taper and Resistance Value

Order Code	Taper	Resistance Value
A100K	Log/A	100KΩ
B1M	Linear/B	1MΩ
C500K	Rev-log/C	500KΩ

Taper: A, B and C

Resistance Value: 1KΩ to 500KΩ and 1MΩ

*Contact us for other requirements.

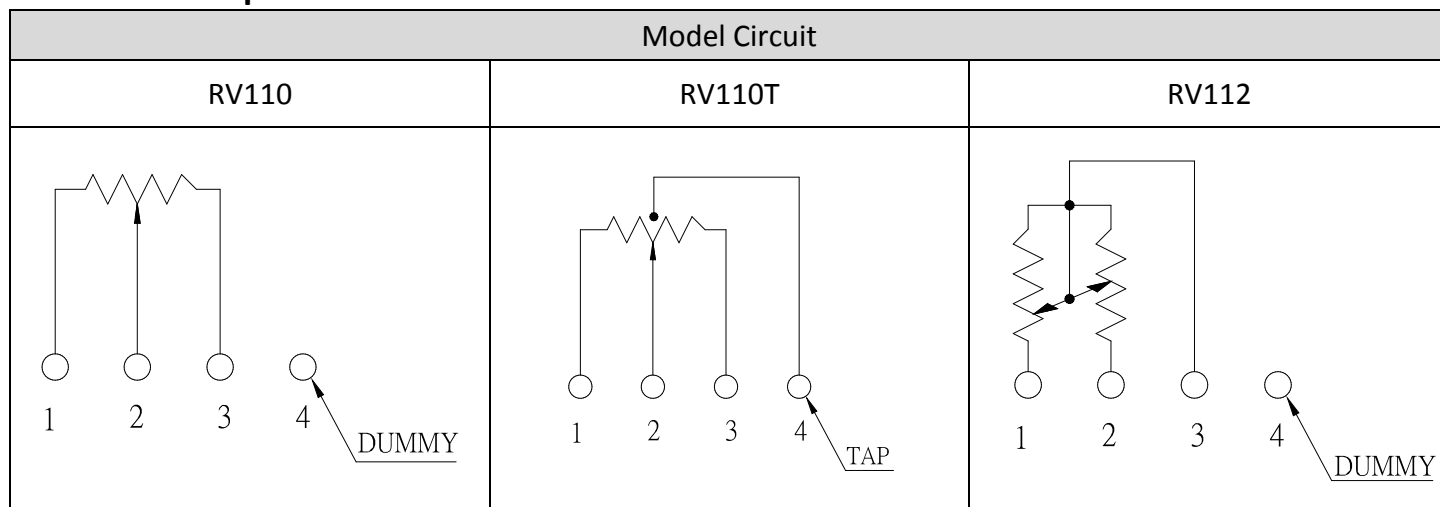
** RV112F series only has W taper

Click

Order Code	Description
Blank	No click
0C	With center click

11mm Snap-In, Insulated and Metal Shaft


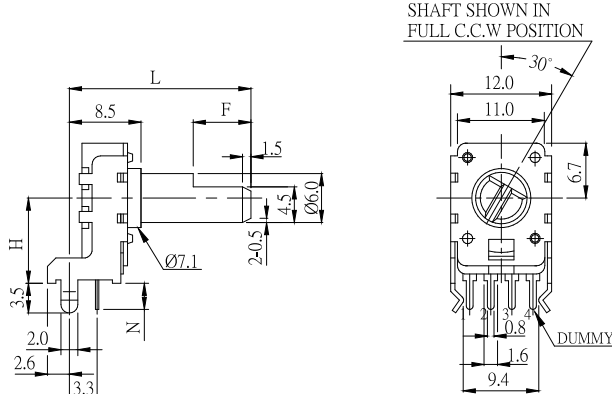


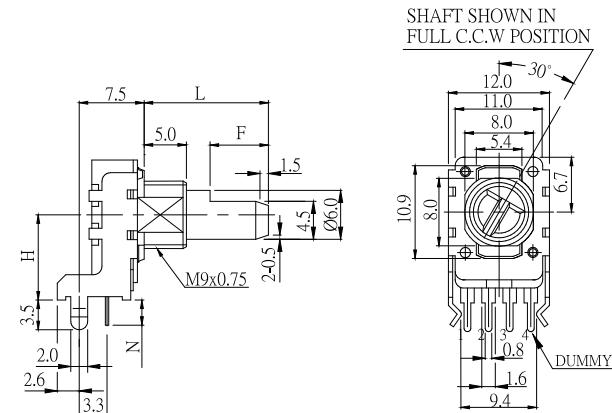


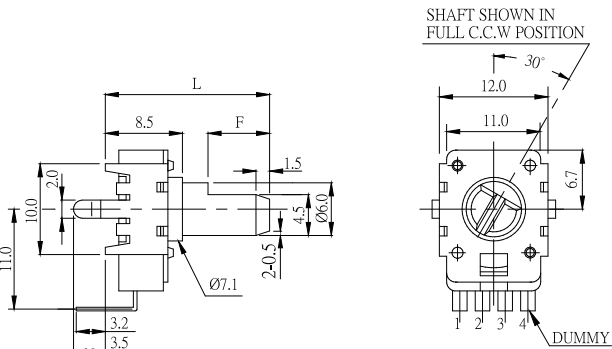

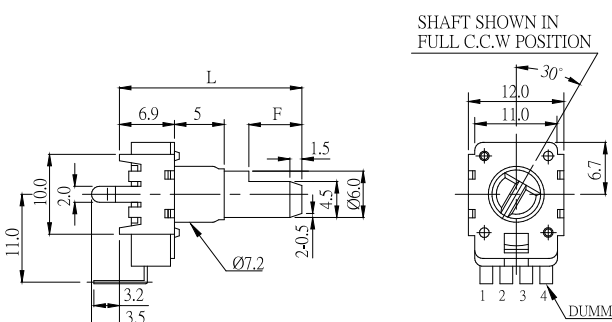

■Model Description



Model	Number of Unit	Terminal Type	With Sleeve or Bushing	Tap
RV110F-20	Single unit	Horizontal	N/A	N/A
RV110F-21	Single unit	Horizontal	N/A	N/A
RV110F-20E1	Single unit	Horizontal	Bushing	N/A
RV110F-21E1	Single unit	Horizontal	Bushing	N/A
RV110F-40	Single unit	Vertical	N/A	N/A
RV110CF-40	Single unit	Vertical	Sleeve	N/A
RV110F-40B1	Single unit	Vertical	Bushing	N/A
RV110F-40E1	Single unit	Vertical	Bushing	N/A
RV110TF-20	Single unit	Horizontal	N/A	With tap
RV110TF-20E1	Single unit	Horizontal	Bushing	With tap
RV110TF-40	Single unit	Vertical	N/A	With tap
RV110TCF-40	Single unit	Vertical	Sleeve	With tap
RV110TF-40B1	Single unit	Vertical	Bushing	With tap
RV110TF-40E1	Single unit	Vertical	Bushing	With tap
RV112F-40	Dual unit	Vertical	N/A	N/A

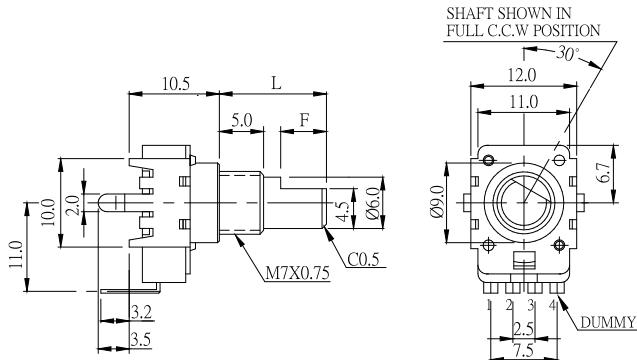
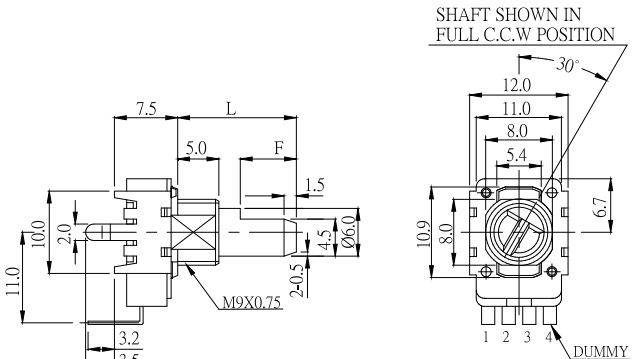

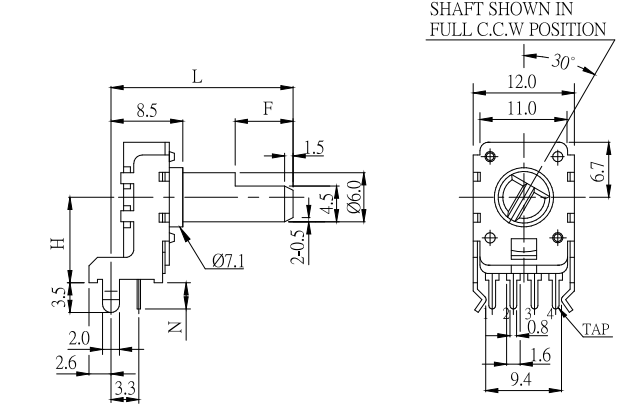

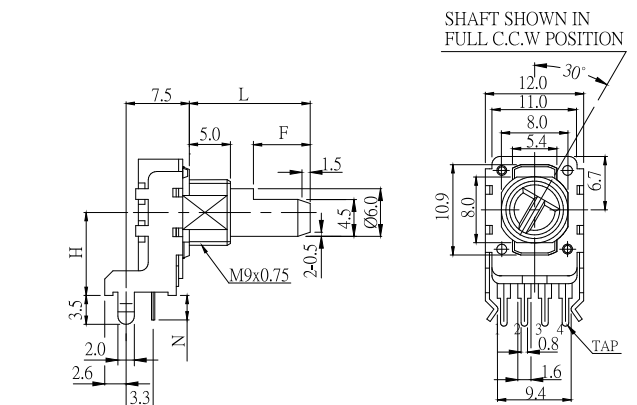
[Back to top](#)

11mm Snap-In, Insulated and Metal Shaft

Order Code	Outline Drawing											
RV110F-20 RV110F-21		SHAFT SHOWN IN FULL C.C.W POSITION  Dimensions: L, 8.5, F, 1.5, 2-0.5, 4.5, Ø6.0, H, 3.5, 2.0, 2.6, 3.3, Ø7.1, 12.0, 11.0, 30°, 6.7, 9.4, 1.6, 0.8, 2.5, 7.5, 4-Ø1.0, 2-2.1, 13.0, 2-2.0, 3.3, DUMMY	<table border="1"><thead><tr><th>Type</th><th>H</th><th>N</th></tr></thead><tbody><tr><td>20</td><td>10.0</td><td>3.2</td></tr><tr><td>21</td><td>12.5</td><td>4.5</td></tr></tbody></table>  P.C.B. MOUNTING HOLE DETAIL	Type	H	N	20	10.0	3.2	21	12.5	4.5
Type	H	N										
20	10.0	3.2										
21	12.5	4.5										
RV110F-20E1 RV110F-21E1		SHAFT SHOWN IN FULL C.C.W POSITION  Dimensions: L, 7.5, 5.0, F, 1.5, 2-0.5, 4.5, Ø6.0, H, 3.5, 2.0, 2.6, 3.3, M9x0.75, 12.0, 11.0, 8.0, 5.4, 30°, 6.7, 10.9, 8.0, 9.4, 1.6, 0.8, 2.5, 7.5, 4-Ø1.0, 2-2.1, 13.0, 2-2.0, 3.3, DUMMY, BUSHING SURFACE	<table border="1"><thead><tr><th>Type</th><th>H</th><th>N</th></tr></thead><tbody><tr><td>20</td><td>10.0</td><td>3.2</td></tr><tr><td>21</td><td>12.5</td><td>4.5</td></tr></tbody></table>  P.C.B. MOUNTING HOLE DETAIL	Type	H	N	20	10.0	3.2	21	12.5	4.5
Type	H	N										
20	10.0	3.2										
21	12.5	4.5										
RV110F-40		SHAFT SHOWN IN FULL C.C.W POSITION  Dimensions: L, 8.5, F, 1.5, 2-0.5, 4.5, Ø6.0, H, 11.0, 10.0, 2.0, 3.2, 3.5, Ø7.1, 12.0, 11.0, 30°, 6.7, 9.4, 1.6, 0.8, 2.5, 7.5, 4-Ø1.0, 2-2.1, 13.0, 2-2.0, 11.0, DUMMY	 P.C.B. MOUNTING HOLE DETAIL									
RV110CF-40		SHAFT SHOWN IN FULL C.C.W POSITION  Dimensions: L, 6.9, 5, F, 1.5, 2-0.5, 4.5, Ø6.0, H, 11.0, 10.0, 2.0, 3.2, 3.5, Ø7.2, 12.0, 11.0, 30°, 6.7, 9.4, 1.6, 0.8, 2.5, 7.5, 4-Ø1.0, 2-2.1, 13.0, 2-2.0, 11.0, DUMMY	 P.C.B. MOUNTING HOLE DETAIL									

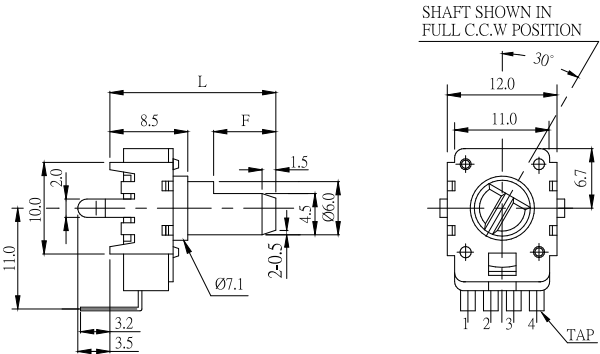
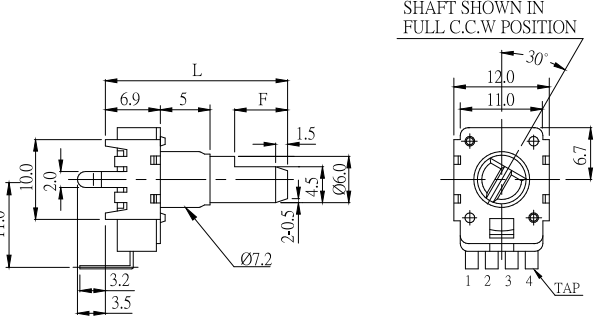

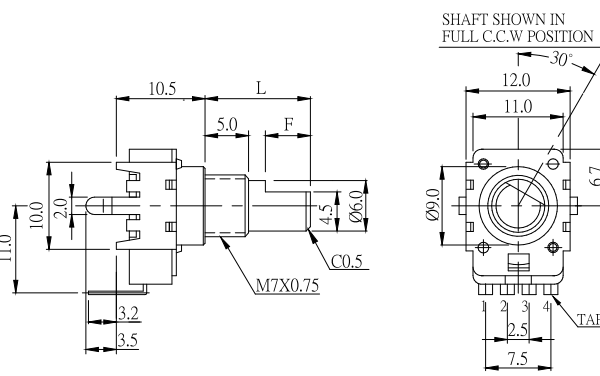
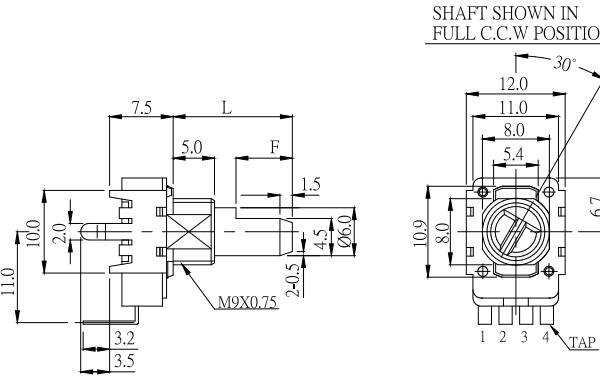
[Back to top](#)

11mm Snap-In, Insulated and Metal Shaft

Order Code	Outline Drawing									
RV110F-40B1	  SHAFT SHOWN IN FULL C.C.W POSITION P.C.B. MOUNTING HOLE DETAIL									
RV110F-40E1	  SHAFT SHOWN IN FULL C.C.W POSITION P.C.B. MOUNTING HOLE DETAIL									
RV110TF-20 RV110TF-21	  SHAFT SHOWN IN FULL C.C.W POSITION <table><thead><tr><th>Type</th><th>H</th><th>N</th></tr></thead><tbody><tr><td>20</td><td>10.0</td><td>3.2</td></tr><tr><td>21</td><td>12.5</td><td>4.5</td></tr></tbody></table> P.C.B. MOUNTING HOLE DETAIL	Type	H	N	20	10.0	3.2	21	12.5	4.5
Type	H	N								
20	10.0	3.2								
21	12.5	4.5								
RV110TF-20E1 RV110TF-21E1	  SHAFT SHOWN IN FULL C.C.W POSITION <table><thead><tr><th>Type</th><th>H</th><th>N</th></tr></thead><tbody><tr><td>20</td><td>10.0</td><td>3.2</td></tr><tr><td>21</td><td>12.5</td><td>4.5</td></tr></tbody></table> P.C.B. MOUNTING HOLE DETAIL	Type	H	N	20	10.0	3.2	21	12.5	4.5
Type	H	N								
20	10.0	3.2								
21	12.5	4.5								


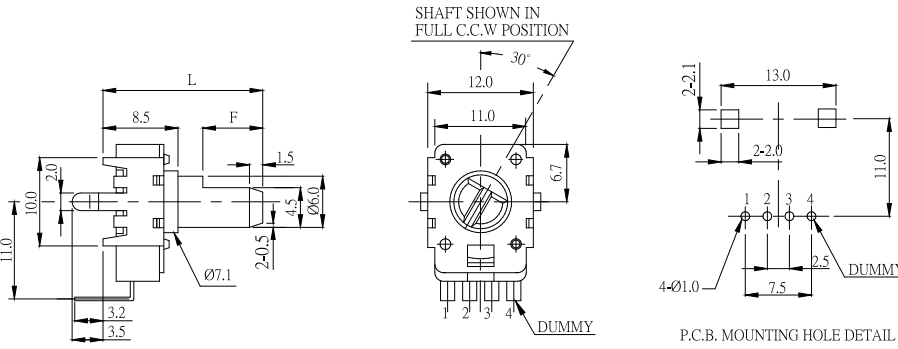
[Back to top](#)

11mm Snap-In, Insulated and Metal Shaft

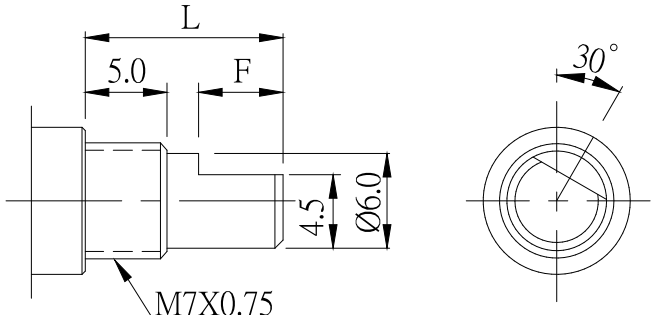
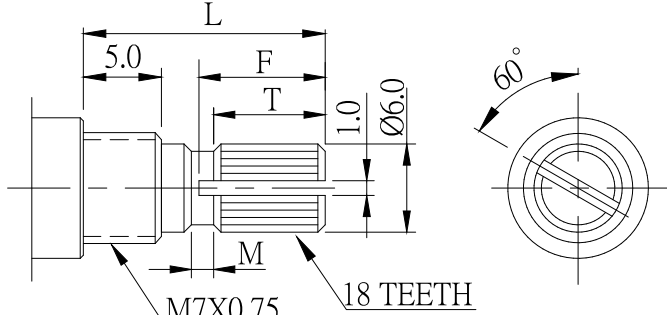
Order Code	Outline Drawing
RV110TF-40	 SHAFT SHOWN IN FULL C.C.W POSITION  P.C.B. MOUNTING HOLE DETAIL
RV110TCF-40	 SHAFT SHOWN IN FULL C.C.W POSITION  P.C.B. MOUNTING HOLE DETAIL
RV110TF-40B1	 SHAFT SHOWN IN FULL C.C.W POSITION  P.C.B. MOUNTING HOLE DETAIL
RV110TF-40E1	 SHAFT SHOWN IN FULL C.C.W POSITION  P.C.B. MOUNTING HOLE DETAIL

[Back to top](#)

11mm Snap-In, Insulated and Metal Shaft

Order Code	Outline Drawing
RV112F-40	  SHAFT SHOWN IN FULL C.C.W POSITION P.C.B. MOUNTING HOLE DETAIL

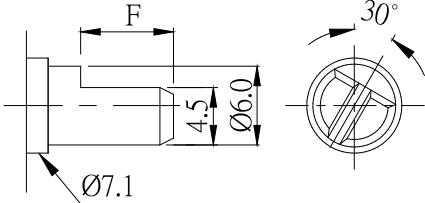
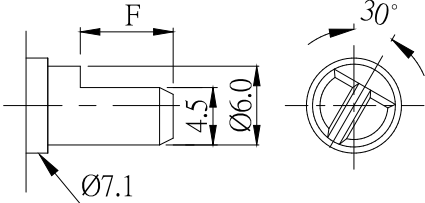
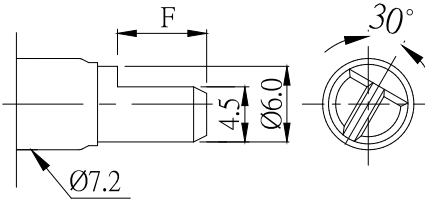
■ Metal Shaft Type

F Type	K Type																
RV110F-40B1-(L)F RV110TF-40B1-(L)F	RV110F-40B1-(L)K RV110TF-40B1-(L)K																
																	
<table><tr><th>Order Code</th><th>15F</th><th>20F</th><th>25F</th></tr><tr><td>L</td><td>15</td><td>20</td><td>25</td></tr></table>	Order Code	15F	20F	25F	L	15	20	25	<table><tr><th>Order Code</th><th>15K</th><th>20K</th><th>25K</th></tr><tr><td>L</td><td>15</td><td>20</td><td>25</td></tr></table>	Order Code	15K	20K	25K	L	15	20	25
Order Code	15F	20F	25F														
L	15	20	25														
Order Code	15K	20K	25K														
L	15	20	25														

[Back to top](#)

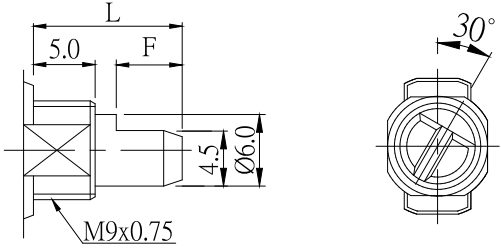
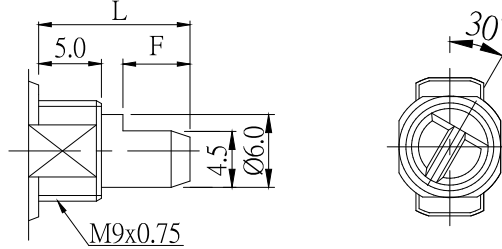
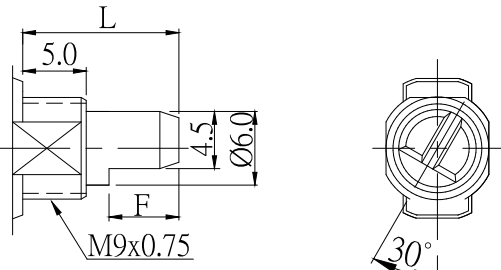
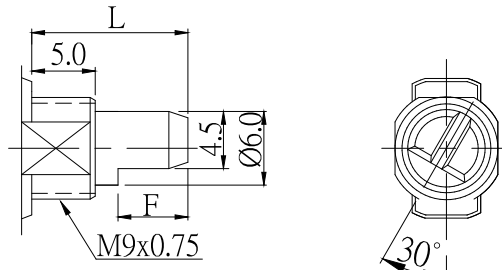
11mm Snap-In, Insulated and Metal Shaft

■ A / AW Plastic Shaft Type

RV110F-20 (21)-(L)A RV110TF-20 (21)-(L)A	RV110F-40-(L)A RV110TF-40-(L)A RV112F-40-(L)A	RV110CF-40-(L)A RV110TCF-40-(L)A
		

Order Code	*15A	20A	225A	25A	275A	30A	325A	35A	375A
L	15	20	21	25	27.5	30	32.5	35	37.5
F	4.5	7	7	7 12	12	12	12	12	12

**15 mm is not available for RV110CF-40 and RV110CTF-40 models.

RV110(T)F-20E1(21E1)-(L)A	RV110(T)F-40E1-(L)A
	
RV110(T)F-20E1(21E1)-(L)AW	RV110(T)F-40E1-(L)AW
	

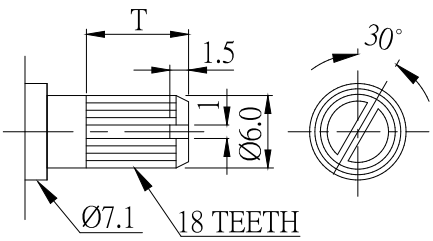
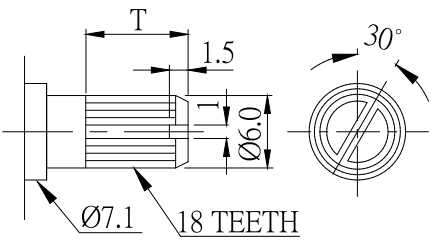
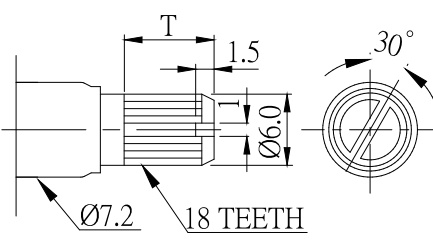
Order Code	125A	135A	15A	175A	20A	225A	25A	275A	29A	30A
	125AW	135AW	15AW	175AW	20AW	225AW	25AW	275AW	29AW	30AW
L	12.5	13.5	15	17.5	20	22.5	25	27.5	29	30
F	7	7	7	7* 12	12	12	12	12	12	12

**17.5mm with F = 7mm is only available for A type, not AW type.

[Back to top](#)

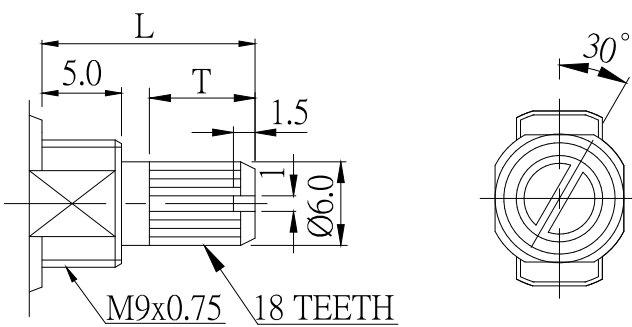
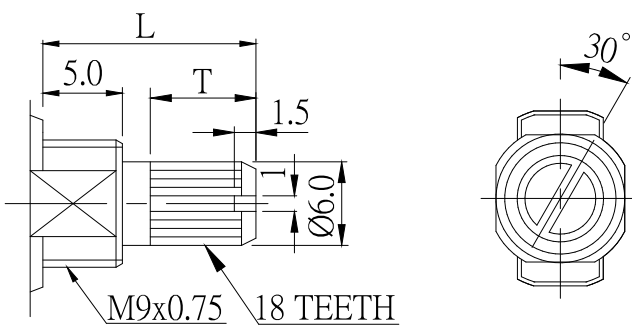
11mm Snap-In, Insulated and Metal Shaft

■ B Plastic Shaft Type

RV110F-20 (21)-(L)B RV110TF-20 (21)-(L)B	RV110F-40-(L)B RV110TF-40-(L)B RV112F-40-(L)B	RV110CF-40-(L)B RV110TCF-40-(L)B
		

Order Code	*15B	20B	225B	25B	275B	30B	375B
L	15	20	21	25	27.5	30	37.5
T	6	7	7	12	12	12	12

**15 mm shaft is not available for RV110CF-40 and RV110CTF-40 models.

RV110F-20E1(21E1)-(L)B RV110TF-20E1(21E1)-(L)B	RV110F-40E1-(L)B RV110TF-40E1-(L)B
	

Order Code	125B	15B	175B	20B	225B	25B
L	12.5	15	17.5	20	22.5	25
T	7	7	7 12	12	12	12

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

[Back to top](#)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Alpha (Taiwan):

[RV110F-40-15A-A10K](#) [RV110F-40-20B-A10K](#) [RV110F-20-15B-A10K](#) [RV110F-40-15B-A10K-0020](#) [RV110F-20-15B-B10K](#) [RV110F-20-15A-B100K](#) [RV110F-40-15A-B100K](#) [RV110F-20-15B-A100K](#) [RV110F-20-15B-B100K](#) [RV110F-40-15B-B100K](#) [RV110F-40-15A-B10K](#) [RV110F-20-15A-A100K](#) [RV110F-40-20B-B10K](#) [RV110F-40-15B-B10K](#) [RV110F-40-15A-A100K](#) [RV110F-40-20B-A100K](#) [RV110F-20-15A-B10K](#) [RV110F-20-15A-A10K](#) [RV110F-40-15B-A100K](#) [RV110F-20-20B-A10K](#) [RV110F-20-20B-A100K](#) [RV110F-20-20B-B10K](#) [RV110F-20-20B-B100K](#) [RV110F-40-20B-B100K](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.