



Grove - UV Sensor

Release date : 9/20/2015

Version : 1.0

Wiki: [http://www.seeedstudio.com/wiki/Grove - UV Sensor](http://www.seeedstudio.com/wiki/Grove_-_UV_Sensor)

Bazaar: <http://www.seeedstudio.com/depot/Grove-UV-Sensor-p-1540.html>

Document Revision History

Revision	Date	Author	Description
1.0	Sep 21, 2015	Victor.He	Create file

Contents

Document Revision History.....	2
1. Introduction	2
2. Features.....	3
3. Specification	4
4. Usage.....	5
4.1 Example	5
5. Resource.....	7

Disclaimer

For physical injuries and possessions loss caused by those reasons which are not related to product quality, such as operating without following manual guide, natural disasters or force majeure, we take no responsibility for that.


Under the supervision of Seeed Technology Inc., this manual has been compiled and published which covered the latest product description and specification. The content of this manual is subject to change without notice.

Copyright

The design of this product (including software) and its accessories is under tutelage of laws. Any action to violate relevant right of our product will be penalized through law. Please consciously observe relevant local laws in the use of this product.

1. Introduction

The Grove – UV Sensor is used for detecting the intensity of incident ultraviolet(UV) radiation. This form of electromagnetic radiation has shorter wavelengths than visible radiation. The Grove - UV Sensor is based on the sensor GUVA-S12D which has a wide spectral range of 200nm-400nm. The module outputs electrical signal which varies with the UV intensity, which gives your suggestion if it is a good idea to beach today.

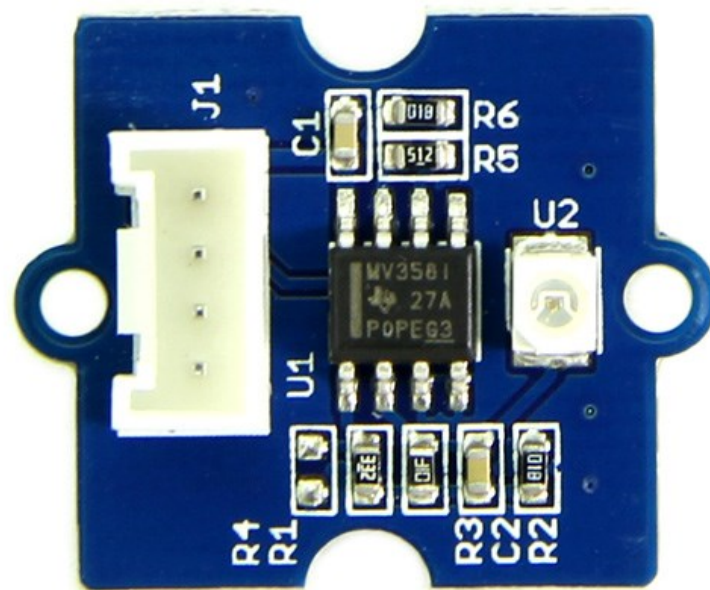

2. Features

- High stability
- Good Sensitivity
- Low power consumption
- Schottky type photodiode sensor
- Wide response range
- Grove Interface


3. Specification

Item	Min	Typical	Max	Unit
Operating Voltage	3.0	5.0	5.1	VDC
Current		0.31		mA
Output Voltage				mV
Response wavelength	200	~	370	nm
Working Temperature	-30	~	85	°C

4. Usage

UV sensors are used in many different applications. Examples include pharmaceuticals, automobiles, and robotics. UV sensors are also used in the printing industry for solvent handling and dyeing processes. In addition, UV sensors are also used in the chemical industry for the production, storage, and transportation of chemicals.

The fact of the UV sensor work is: In sunlight, the UV index and Photocurrent are a linear relationship.

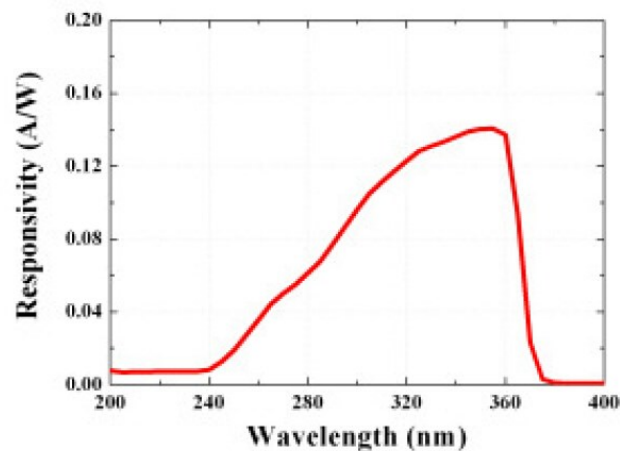

About our Grove - UV Sensor, we have converted Photocurrent to corresponding voltage value collected by Arduino/Seeeduino. The output voltage and the UV index is linear:

$$\text{illumination intensity} = 307 * V_{sig}$$

where:

V_{sig} is the value of voltage measured from the SIG pin of the Grove interface, unit V.

illumination intensity unit: mW/m^2 for the combination strength of UV light with wavelength range: 240nm~370nm

Note: To calculate the UV index value, please refer to <http://www2.epa.gov/sunwise/uv-index>. It's hard to say that the measurement from this sensor can be converted to the EPA standard UV index, but can be estimated roughly.

$$\text{UV Index} = \text{illumination intensity} / 200$$

4.1 Example

- Connect it to A0 port of [Grove - Base Shield](#).
- Plug the Grove - Base Shield into Arduino/Seeeduino and connect them to PC using a USB cable.
- The demo code as show below.

```
void setup() {  
  
    Serial.begin(9600);  
}  
  
void loop()  
{  
    int sensorValue;  
    long sum=0;  
    for(int i=0;i<1024;i++)  
    {  
        sensorValue=analogRead(A0);  
        sum=sensorValue+sum;  
        delay(2);  
    }  
    sum = sum >> 10;  
    Serial.print("The voltage value:");  
    Serial.print(sum*4980.0/1023.0);  
    Serial.println("mV");  
    delay(20);  
    Serial.print("\n");  
}
```

5. Resource

[Grove - UV Sensor Eagle File](#)

[Grove - UV Sensor Schematic.pdf](#)

[UV Sensor Datasheet](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.