

3 Watts

- International Medical Approvals
- 4000 VAC Reinforced Insulation
- Meets IEC60601-1, 3rd Edition
- 2 MOPP Isolation at 250 VAC
- 2 μ A Patient Leakage Current
- DIP24 Package
- EN55011 Level A With No External Components
- 3 Year Warranty



Dimensions:

JHL03:
1.25 x 0.80 x 0.40" (31.15 x 20.32 x 10.20 mm)

Models & Ratings


Input Voltage	Output Voltage	Output Current	Input Current		Maximum Capacitive Load ⁽³⁾	Efficiency ⁽⁴⁾	Model Number
			No Load ⁽¹⁾	Full Load ⁽²⁾			
10-17 V	5.0 V	600 mA	56 mA	325 mA	720 μ F	76%	JHL0312S05
	12.0 V	250 mA	72 mA	316 mA	300 μ F	78%	JHL0312S12
	15.0 V	200 mA	67 mA	315 mA	240 μ F	78%	JHL0312S15
	± 12.0 V	± 125 mA	43 mA	304 mA	± 140 μ F	81%	JHL0312D12
	± 15.0 V	± 100 mA	56 mA	303 mA	± 120 μ F	80%	JHL0312D15
20-30 V	5.0 V	600 mA	38 mA	167 mA	720 μ F	74%	JHL0324S05
	12.0 V	250 mA	37 mA	165 mA	300 μ F	78%	JHL0324S12
	15.0 V	200 mA	23 mA	146 mA	240 μ F	82%	JHL0324S15
	± 12.0 V	± 125 mA	29 mA	150 mA	± 140 μ F	80%	JHL0324D12
	± 15.0 V	± 100 mA	42 mA	166 mA	± 120 μ F	80%	JHL0324D15

Notes

1. Input current measured at nominal input voltage.
2. Input current measured at lowest input voltage.

3. Maximum capacitive load is per output.
4. Typical values.

Mechanical Details

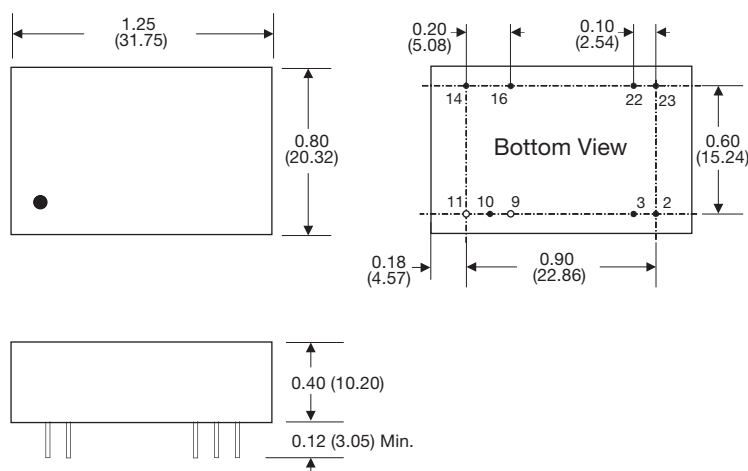

Pin Connections		
Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
10	Trim	Trim
11	No Pin	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

Notes

1. All dimensions are in inches (mm)
2. Weight: 0.04 lbs (20 g) approx.
3. Pin diameter: 0.02 $\pm$ 0.002 (0.5 $\pm$ 0.05)
4. Pin pitch tolerance: $\pm$ 0.014 ($\pm$ 0.35)
5. Case tolerance: $\pm$ 0.02 ($\pm$ 0.5)

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage Range	10		17	VDC	12 V nominal
	20		30	VDC	24 V nominal
Input Current					See Models and Ratings table
Inrush Current			25	A	At 30 VDC input
Input Filter	Pi type				
Patient Leakage Current			2	µA	
Undervoltage Lockout	On at >8.8 V. Off <8.3 V				12 V models
	On at >17.5 V. Off <17.0 V				24 V models
Input Surge			25	VDC	12 V models for 3 s
			50	VDC	24 V models for 3 s

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage	5		30	V	See Models and Ratings table
Output Voltage Trim			±10	%	Via external resistors, see Application Notes
Initial Set Accuracy			±1	%	on V1
			±2	%	on V2 of dual output models
Minimum Load	0			A	No minimum load required
Start Up Delay		5		ms	
Start Up Rise Time		2		ms	
Line Regulation			±0.3	%	
Load Regulation			±1	%	0 - 100% load
Cross Regulation			±4	%	On dual output models with one output set to 50% load and the other varied from 10% to 100% load (D05 20% to 100%)
Transient Response			4	% deviation	Recovery to within 1% in <500 µs for a 50% load change at 0.25 A/µs rate
Ripple & Noise			1	% pk-pk	20 MHz bandwidth
Short Circuit Protection					Trip & Restart (hiccup mode), auto recovery
Overload Protection	120		200	%	Trip & Restart (hiccup mode)
Overvoltage Protection	115		140	%	
Temperature Coefficient			0.03	%/°C	

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		80		%	See Models and Ratings table
Isolation	4000			VAC	For 1 min. Double/reinforced with a working voltage of 250 VAC. Meets 2 x MOPP per 3rd edition of IEC60601-1 5000 VAC for 10 ms in accordance with IEC60664-1
Patient Leakage Current			2	µA	
Input to Output Capacitance			20	pF	
Switching Frequency		250		kHz	
Power Density			7.5	W/in ³	
Mean Time Between Failure		>1		MHrs	MIL-HDBK-217F, +25 °C GB
Weight		0.04 (20.0)		lb (g)	

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-20		+80	°C	See derating curve
Storage Temperature	-40		+100	°C	
Case Temperature			+100	°C	
Humidity	5		90	%RH	Non-condensing
Cooling					Natural convection
Shock	±3 shocks in each plane, total 18 shocks of 30 g : 11 ms halfsine. Conforms to EN60068-2-27 & EN60068-2-47				
Vibration	10-500 Hz at 2 g sweep and endurance at resonance in all 3 planes. Conforms to EN60068-2-6				

EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Conducted	EN55011	Level A	
Radiated	EN55011	Level A	

EMC: Immunity


Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Immunity	IEC60601-1-2	Ed 4.0: 2014	As Below	
ESD Immunity	EN61000-4-2	±8 kv Contact, ±15 kv Air	A	
Radiated Immunity	EN61000-4-3	10 V/m	A	80 MHz - 2.7 GHz plus discrete communication proximity field frequencies
EFT/Burst	EN61000-4-4	2	A	
Surges	EN61000-4-5	1	A	
Conducted Immunity	EN61000-4-6	3 Vm	A	
Magnetic Fields	EN61000-4-8	30 A/m	A	
Safety Approvals	ANSI/AMMI ES60601-1 3rd Edition, CSA-22.2 No.60601-1:2008, IEC60601-1 3rd Edition			

Safety Approvals


Safety Agency	Safety Standard	Notes & Conditions
CB Report	IEC60601-1 Including Risk Management	Medical
UL	ANSI/AAMI ES60601-1 3rd Ed. & CSA C22.2, No.60601-1:2008	Medical
EN	EN60601-1	Medical

Application Notes

Derating Curve

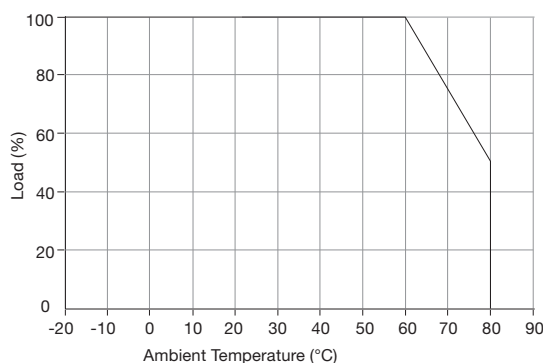

External Output Trim

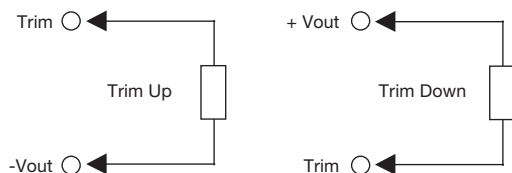

For 5 V output:
 Trim +10%, R = 3.4 k typical
 Trim -10%, R = 1.1 k typical

For 12 V output:
 Trim +10%, R = 5.9 k typical
 Trim -10%, R = 11.3 k typical

For 15 V output:
 Trim +10%, R = 8.4 k typical
 Trim -10%, R = 10.4 k typical

For ±12 V output:
 Trim +10%, R = 12.8 k typical
 Trim -10%, R = 9.5 k typical

For ±15 V output:
 Trim +10%, R = 18 k typical
 Trim -10%, R = 14.8 k typical



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.