

MAX9065**Ultra-Small, nanoPower, Window Comparator
in 4 UCSP and 5 SOT23****General Description**

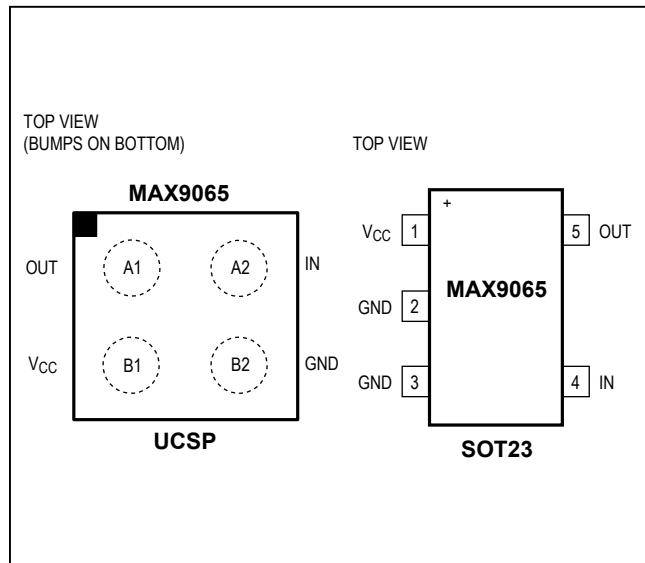
The MAX9065 is an ultra-small, low-power, window comparator ideal for a wide variety of portable electronics applications such as cell phones, portable media players, and notebooks that have extremely tight board space and power constraints. It comes in both a 4-bump UCSP™ package with a 1mm x 1mm footprint (as small as two 0402 resistors) and a 5-pin SOT23 package.

The MAX9065 features a common-mode input range of -0.3V to +5.5V independent of supply voltage. The input current goes to zero when the MAX9065 is powered down ($V_{CC} = 0$). Additionally, the MAX9065 features high RF immunity.

The MAX9065 has a push-pull output and consumes only 1 μ A (max) supply current. The MAX9065 operates down to 1.0V over the extended -40°C to +85°C temperature range.

Applications

- Cell Phones
- Portable Media Players
- Electronic Toys
- Notebook Computers
- Portable Medical Devices

Pin Configurations**Features**

- Tiny 1mm x 1mm 4-Bump UCSP
 - Footprint = Two 0402 Resistors
 - Also Available in 5-Pin SOT23 Package
- Ultra-Low Power Operating Current
 - 1 μ A (max)
- -0.3V to +5.5V Input Voltage Range
- 1.0V to 5.5V V_{CC} Range
- 3.0V and 4.2V Trigger Points
- -40°C to +85°C Extended Temperature Range

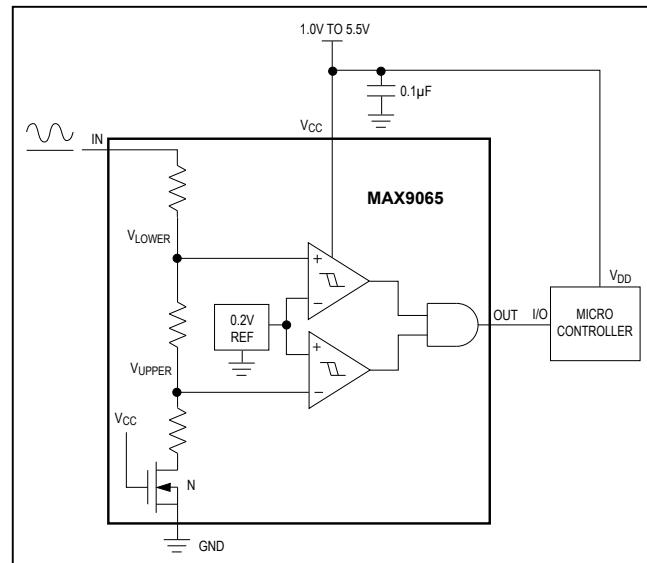
Ordering Information

PART	PIN-PACKAGE	TOP MARK
MAX9065EBS+G45	4 UCSP	AGC
MAX9065EUK+	5 SOT23	AFFL
MAX9065AEWS+TCNB	4 WLP	AGO

Note: All devices are specified over the extended -40°C to +85°C operating temperature range.

+Denotes a lead-free/RoHS-compliant package.

G45 = Protective die coating.

Typical Operating Circuit

UCSP is a trademark of Maxim Integrated Products, Inc.

Absolute Maximum Ratings

V_{CC} , IN to GND	-0.3V to +6V
OUT to GND	-0.3V to ($V_{CC} + 0.3V$)
Output Short-Circuit Current Duration	10s
Input Current into Any Terminal	$\pm 20\text{mA}$
Continuous Power Dissipation	

4-Bump UCSP (derate 3.0mW/ $^{\circ}\text{C}$ above +70 $^{\circ}\text{C}$) 238mW5-Pin SOT23 (derate 3.9mW/ $^{\circ}\text{C}$ above +70 $^{\circ}\text{C}$) 312mW4-Bump WLP (derate 3mW/ $^{\circ}\text{C}$ above +70 $^{\circ}\text{C}$) 915mW

Operating Temperature Range	-40 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$
Junction Temperature	+150 $^{\circ}\text{C}$
Storage Temperature Range	-65 $^{\circ}\text{C}$ to +150 $^{\circ}\text{C}$
Lead Temperature (SOT23 only, soldering 10s)	+300 $^{\circ}\text{C}$
Soldering Temperature (reflow)	+260 $^{\circ}\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics

($V_{CC} = 3.3\text{V}$, $T_A = -40^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$. Typical values are at $T_A = +25^{\circ}\text{C}$, unless otherwise noted.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
DC CHARACTERISTICS							
Upper Threshold Voltage	UTV	MAX9065EBS+ 4 UCSP	$T_A = +25^{\circ}\text{C}$	4.158	4.20	4.242	V
			$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$	4.10		4.30	
		MAX9065EUK+ 5 SOT23	$T_A = +25^{\circ}\text{C}$	4.04	4.20	4.36	
			$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$	3.98		4.42	
		MAX9065AEBS+ 4 UCSP	$T_A = +25^{\circ}\text{C}$	1.152	1.20	1.248	
			$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$	1.132		1.268	
Lower Threshold Voltage	LTV	MAX9065EBS+ 4 UCSP	$T_A = +25^{\circ}\text{C}$	2.94	3.00	3.06	V
			$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$	2.92		3.08	
		MAX9065EUK+ 5 SOT23	$T_A = +25^{\circ}\text{C}$	2.88	3.00	3.12	
			$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$	2.83		3.17	
		MAX9065AEBS+ 4 UCSP	$T_A = +25^{\circ}\text{C}$	0.576	0.60	0.624	
			$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$	0.566		0.634	
Input Voltage Range	V_{IN}			-0.3		+5.5	V
Hysteresis	V_{HYS}	(Note 2)			± 1.0		%
Resistor String Input Resistance	R_{IN}			5.8	11	17.7	M Ω
Input Shutdown Current	I_{IN_SHDN}	$V_{CC} = 0\text{V}$, $V_{IN} = 5.5\text{V}$			1	15	nA
Output Voltage Low	V_{OL}	$I_{SINK} = 100\mu\text{A}$, $V_{CC} = 1\text{V}$, $T_A = +25^{\circ}\text{C}$			0.2		V
		$I_{SINK} = 1.2\text{mA}$, $V_{CC} = 3.3\text{V}$			0.3		
		$I_{SINK} = 1.2\text{mA}$, $V_{CC} = 5.5\text{V}$			0.5		
Output Voltage High	V_{OH}	$I_{SOURCE} = 25\mu\text{A}$, $V_{CC} = 1\text{V}$, $T_A = +25^{\circ}\text{C}$			$V_{CC} - 0.2$		V
		$I_{SOURCE} = 0.3\text{mA}$, $V_{CC} = 3.3\text{V}$			$V_{CC} - 0.3$		
		$I_{SOURCE} = 0.75\text{mA}$, $V_{CC} = 5.5\text{V}$			$V_{CC} - 0.5$		
AC CHARACTERISTICS							
Propagation Delay	t_{PD}	Overdrive = $\pm 100\text{mV}$ (Notes 3, 4)			25		μs
Fall Time	t_F	$C_L = 10\text{pF}$			14		ns
Rise Time	t_R	$C_L = 10\text{pF}$			30		ns

Electrical Characteristics (continued)(V_{CC} = 3.3V, T_A = -40°C to +85°C. Typical values are at T_A = +25°C, unless otherwise noted.) (Note 1)

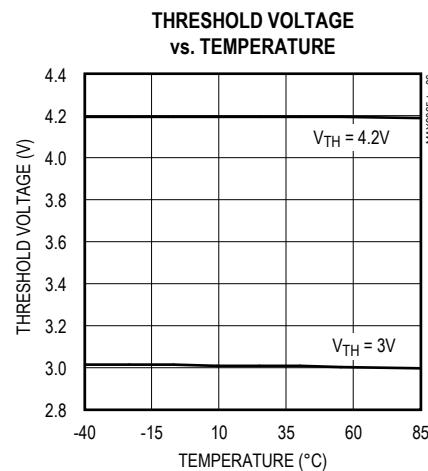
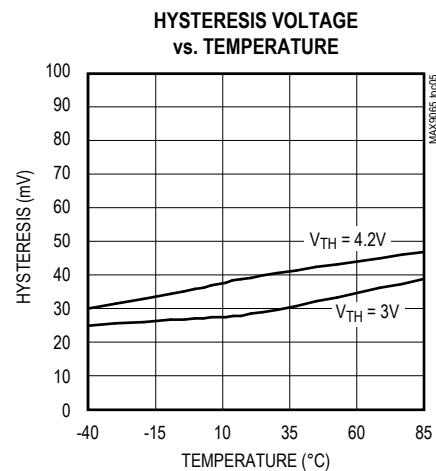
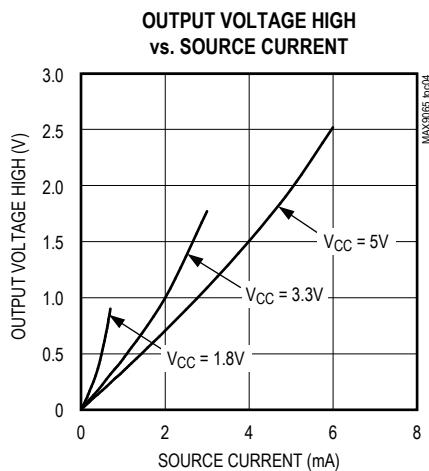
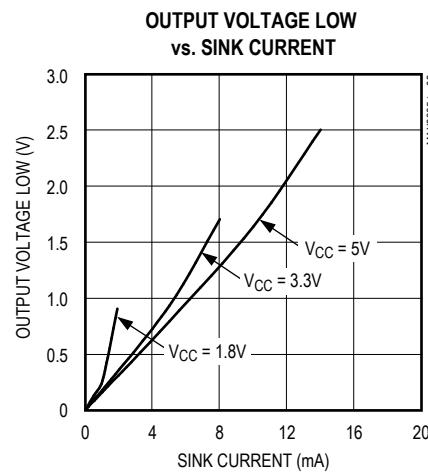
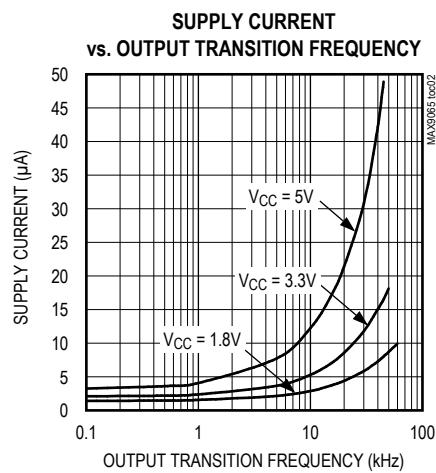
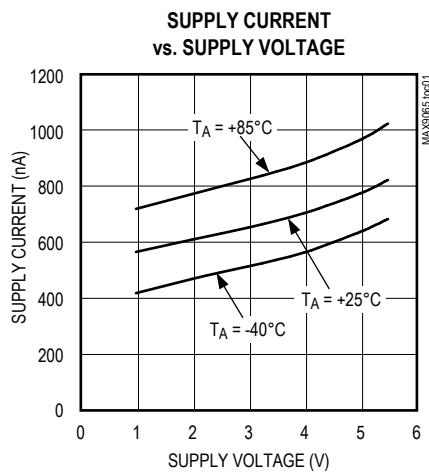
PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
POWER SUPPLY						
Supply Voltage	V _{CC}	Guaranteed by V _{OS} tests	1	5.5	5.5	V
Supply Current	I _{CC}	V _{CC} = 5.5V	0.7	1.35	1.35	μA
		V _{CC} = 1.0V, T _A = +25°C	0.6	1.0	1.0	
Power-Supply Rejection Ratio	PSRR	V _{CC} = 0.9V to 5.5V, T _A = +25°C	40	53	53	dB
Power-Up Time	t _{ON}		3	3	ms	

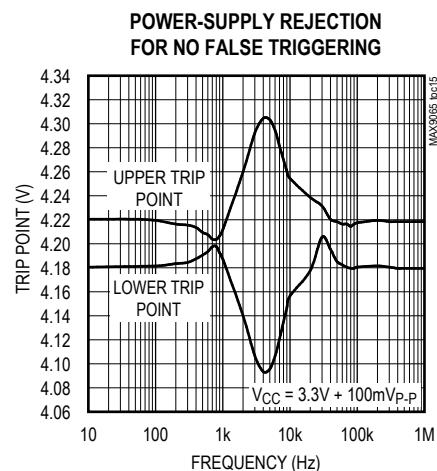
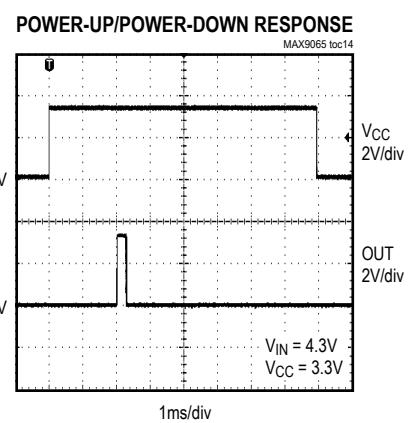
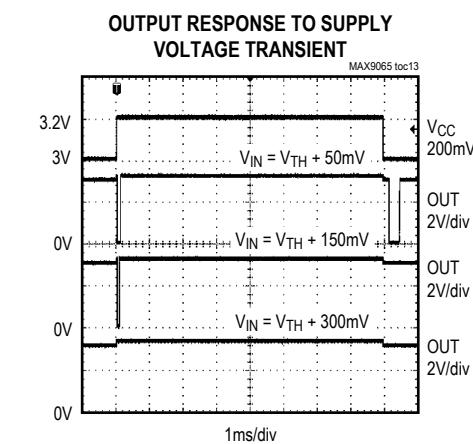
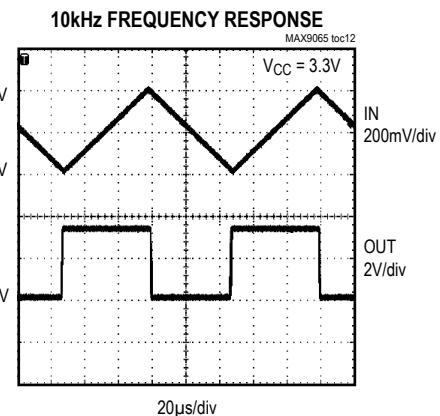
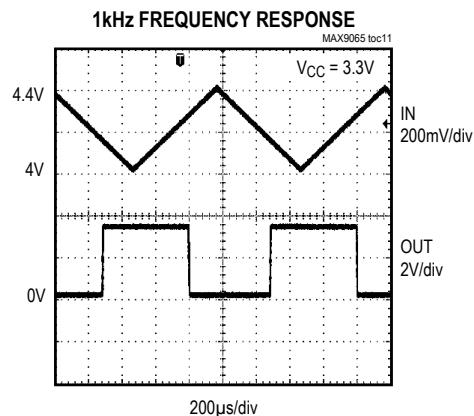
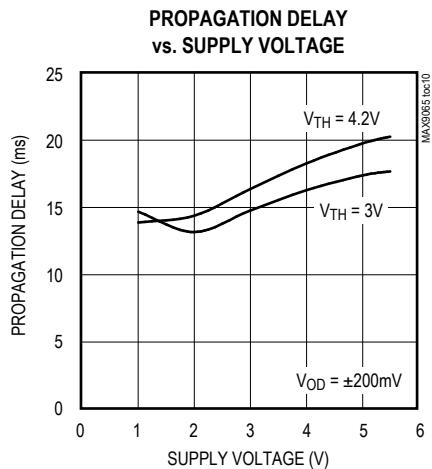
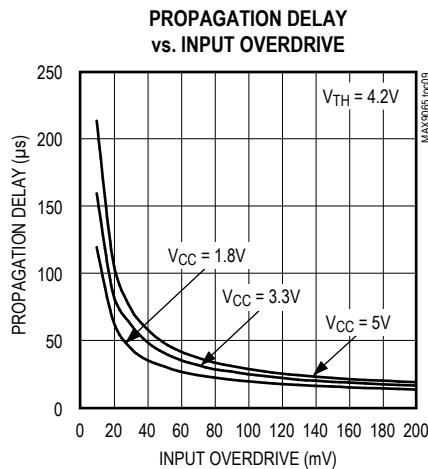
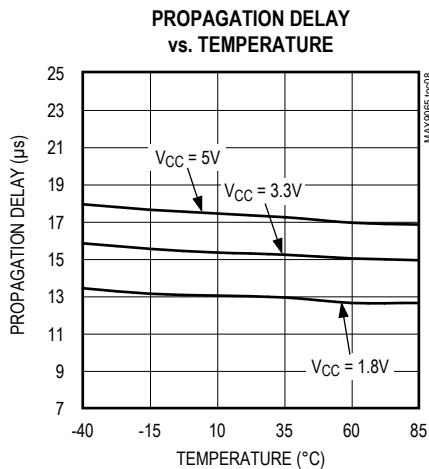
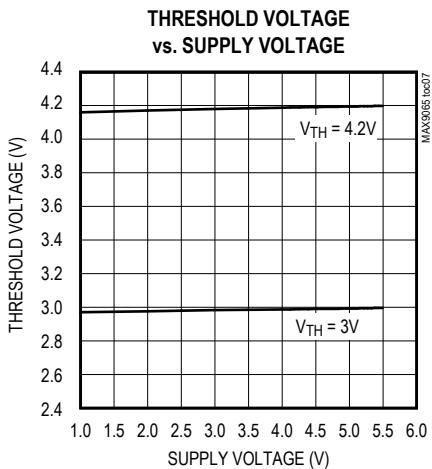
Note 1: All devices are 100% production tested at T_A = +25°C. Temperature limits are guaranteed by design.

Note 2: Hysteresis is the input voltage difference between the two switching points.

Note 3: Overdrive is defined as the voltage above or below the average of the switching points.

Note 4: Guaranteed by ATE and/or bench characterization over temperature.

Typical Operating Characteristics(V_{CC} = 3.3V, T_A = -40°C to +85°C. Typical values are at T_A = +25°C, unless otherwise noted.)

Typical Operating Characteristics (continued)(V_{CC} = 3.3V, T_A = -40°C to +85°C. Typical values are at T_A = +25°C, unless otherwise noted.)

Pin Description

PIN		NAME	FUNCTION
SOT23	UCSP		
1	B1	V _{CC}	External Supply Input. Bypass to ground with a 0.1µF bypass capacitor.
2, 3	B2	GND	Ground
4	A2	IN	Window Comparator Input
5	A1	OUT	Push-Pull Output

Detailed Description

The MAX9065 is an extremely small window comparator designed for compact, low-current applications, featuring a supply current of less than 1µA (max).

MAX9065 Operation

At the heart of the MAX9065 are two comparators, a resistor-divider with a disconnect switch, a 200mV reference, digital logic circuitry, and an output stage (see the [Typical Operating Circuit](#)).

The digital logic circuitry and the output stage together behave like an AND gate. The gate's inputs are the outputs of the two comparators. When either comparator's output is low, the output asserts low. When both comparator's outputs are high, the output asserts high.

When power is applied to V_{CC}, the n-channel FET at the bottom of the resistor-divider is turned on. The resistor-divider provides two voltages, V_{UPPER} and V_{LOWER}, for comparison with an internal 0.2V reference voltage. When the input voltage exceeds 4.2V, V_{UPPER} is greater than 0.2V, causing the output to assert low. When the input voltage falls below 3.0V, V_{LOWER} is less than 0.2V, causing the output also to assert low. With the input voltage between 3.0V and 4.2V, the output asserts high, indicating that the input voltage is within the desired range. [Table 1](#) summarizes the operation of the MAX9065.

When V_{CC} goes to 0V, the n-channel FET is turned off, eliminating the resistor-divider as a leakage path for current.

Table 1. MAX9065 Operation

INPUT VOLTAGE	OUTPUT
V _{IN} > 4.2V	Low
3.0V < V _{IN} < 4.2V	High
V _{IN} < 3.0V	Low

Table 2. MAX9065A Operation

INPUT VOLTAGE	OUTPUT
V _{IN} > 1.2V	Low
0.6V < V _{IN} < 1.2V	High
V _{IN} < 0.6V	Low

MAX9065A Operation

The resistor-divider provides two voltages, V_{UPPER} and V_{LOWER}, for comparison with an internal 0.2V reference voltage. When the input voltage exceeds 1.2V, V_{UPPER} is greater than 0.2V, causing the output to assert low.

When the input voltage falls below 0.6V, V_{LOWER} is less than 0.2V, causing the output also to assert low. With the input voltage between 0.6V and 1.2V, the output asserts high, indicating that the input voltage is within the desired range. [Table 2](#) summarizes the operation of the MAX9065A.

Applications

The MAX9065 is designed specifically to monitor the voltage on a single lithium battery. Keeping the voltage on a lithium battery within a tight range is important to prevent damage to the battery. Specifically, ensuring that the battery's voltage neither exceeds 4.2V nor falls below 3.0V lengthens the lifetime of the battery and avoids any hazardous battery conditions.

Hysteresis

There are four trip points for hysteresis. See [Figure 1](#).

Power-Supply Considerations

Bypass V_{CC} with a 0.1µF capacitor to ground.

Chip Information

PROCESS: BiCMOS

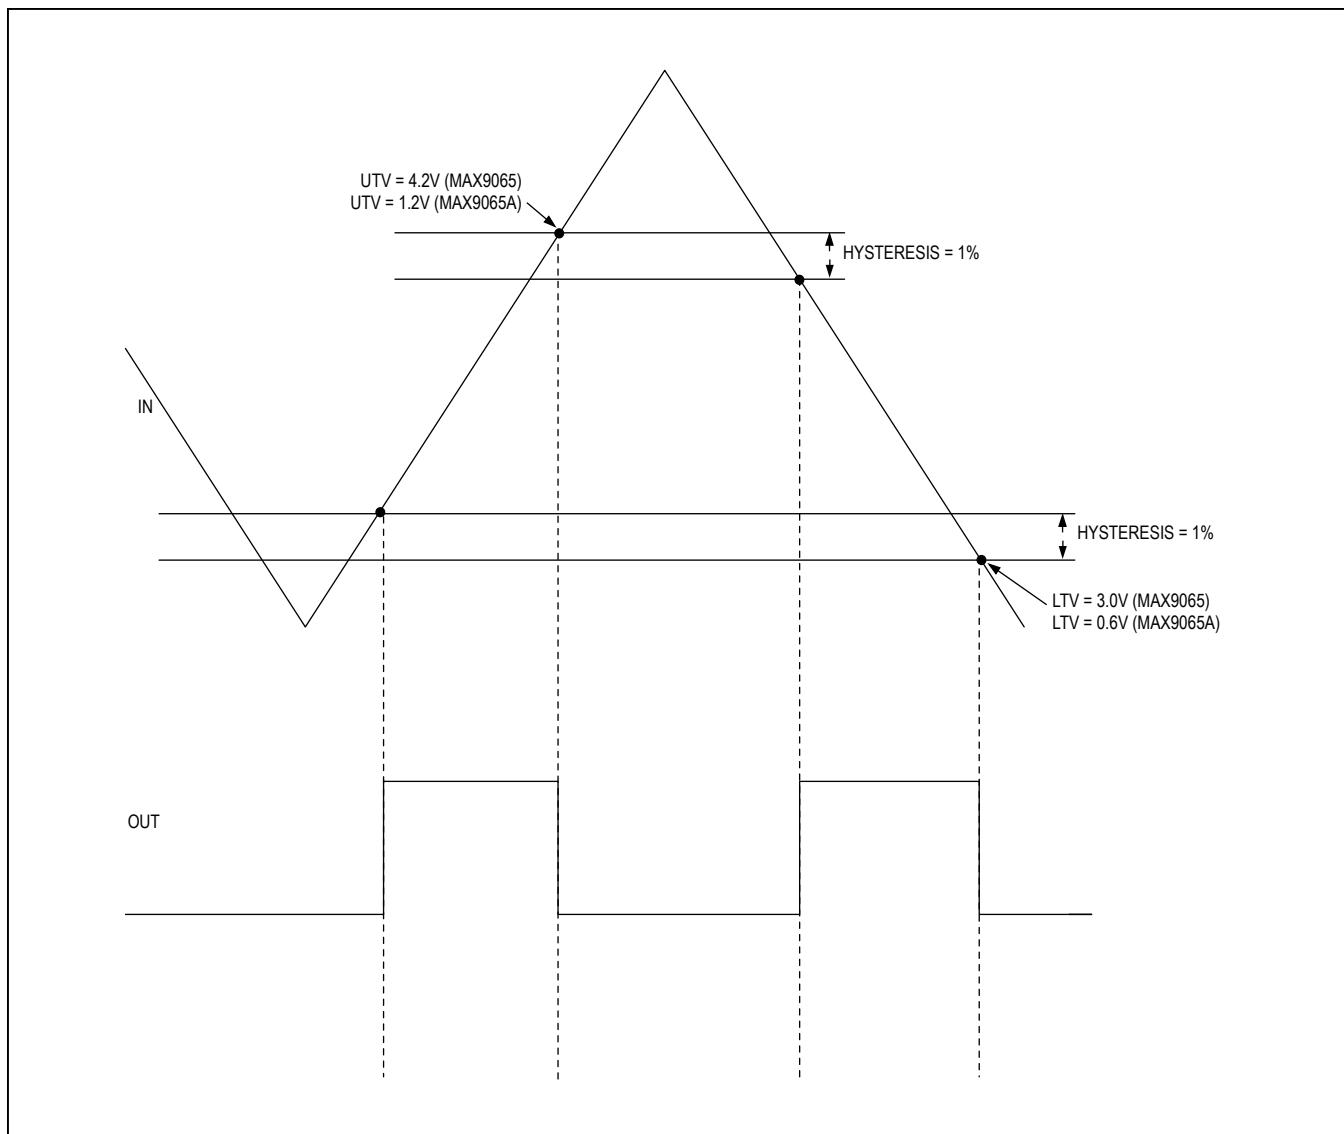
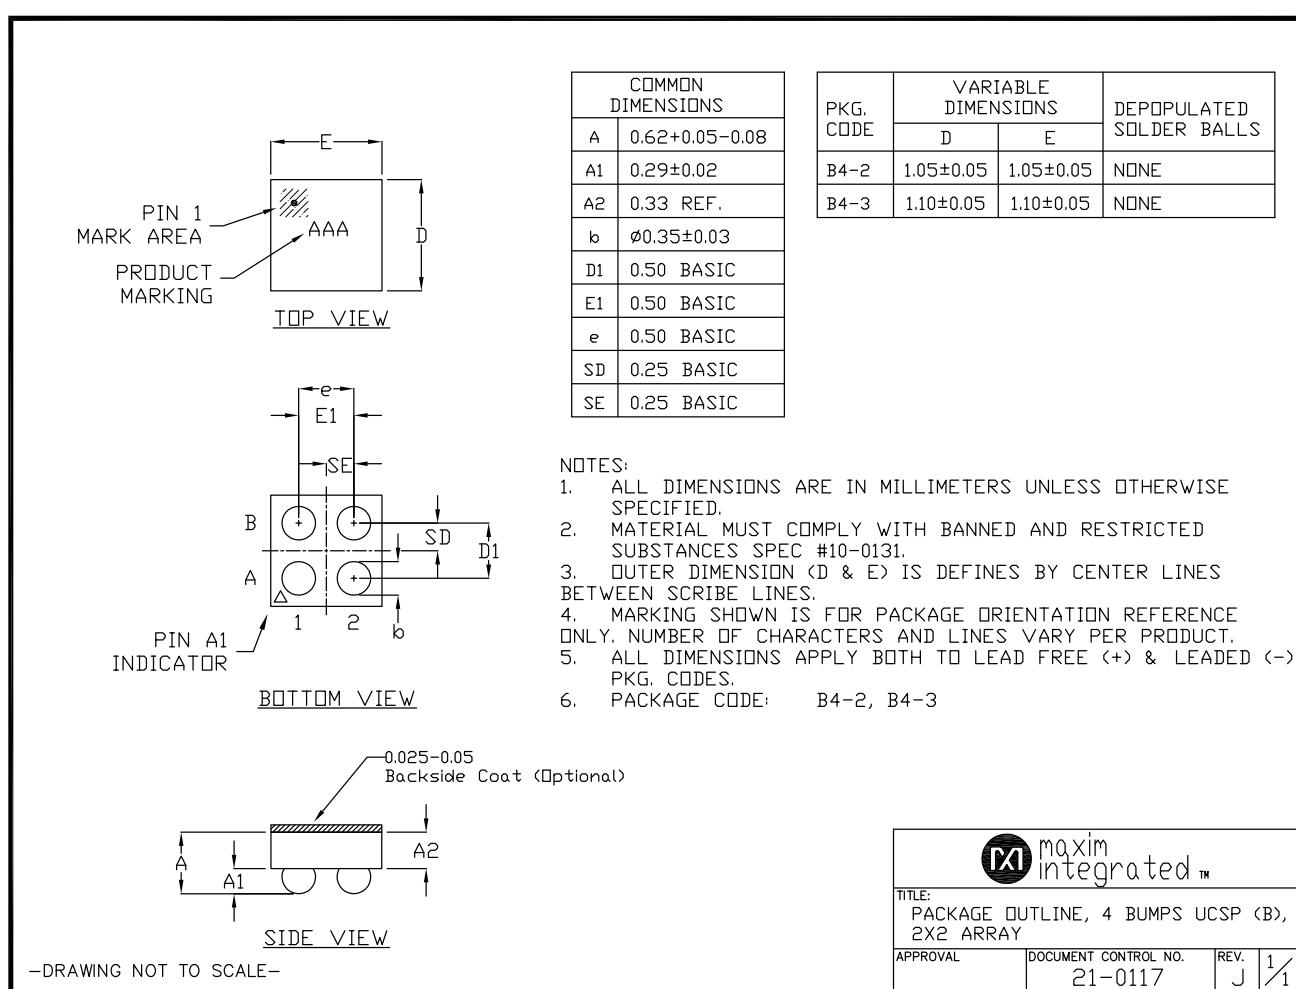


Figure 1. Hysteresis Trip Points

Package Information

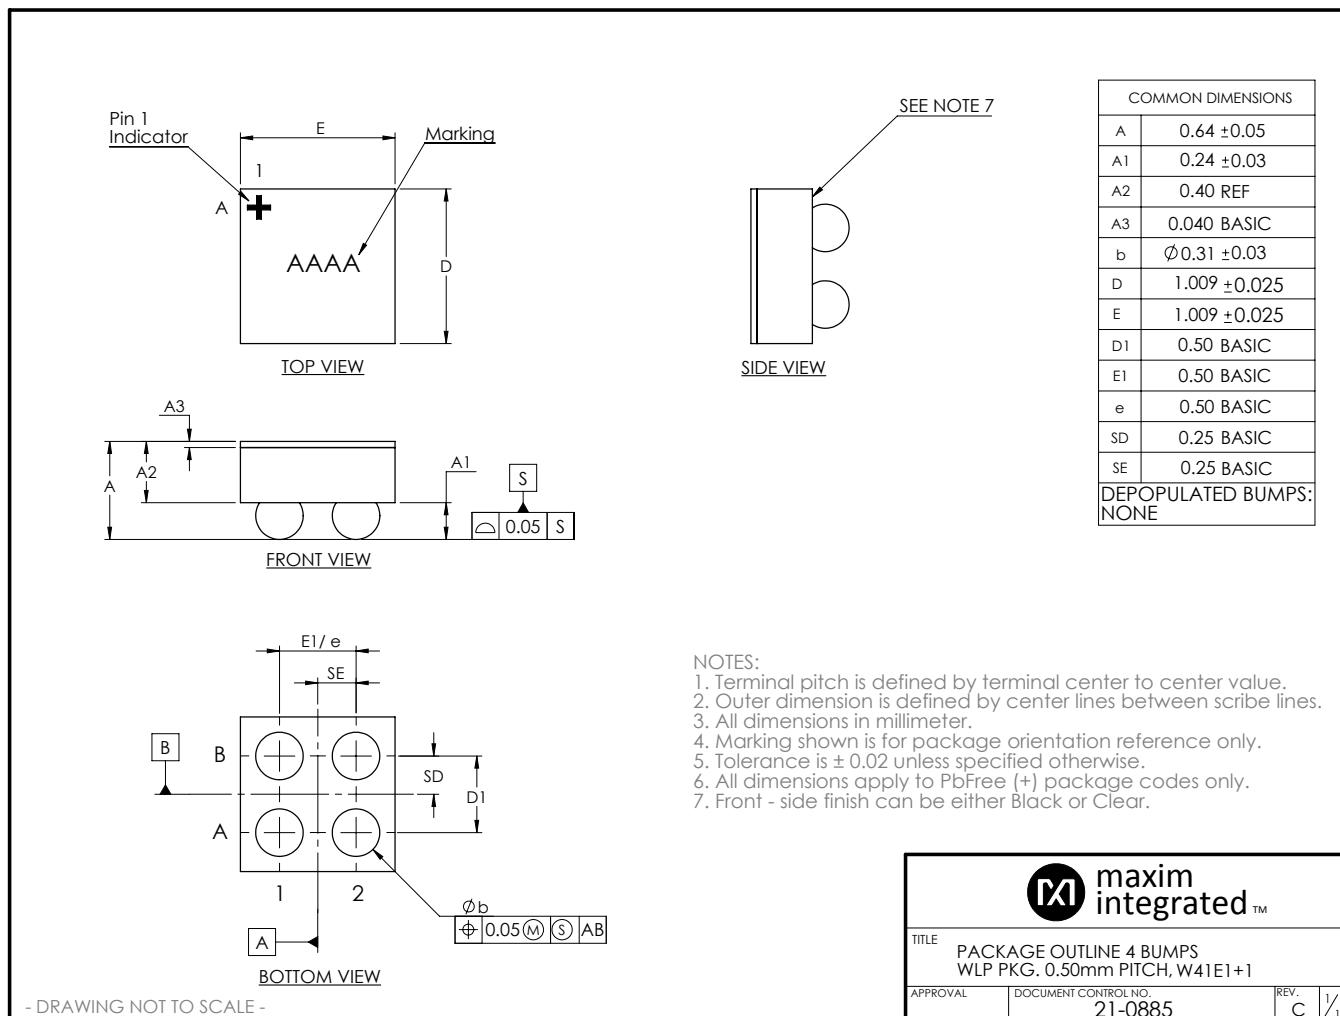
For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a “+”, “#”, or “-” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
5 SOT23	U5+2	21-0057	90-0174
4 UCSP	B4+1	21-0117	Refer to Application Note 1891
4 WLP	W41E1+1	21-0885	90-0366



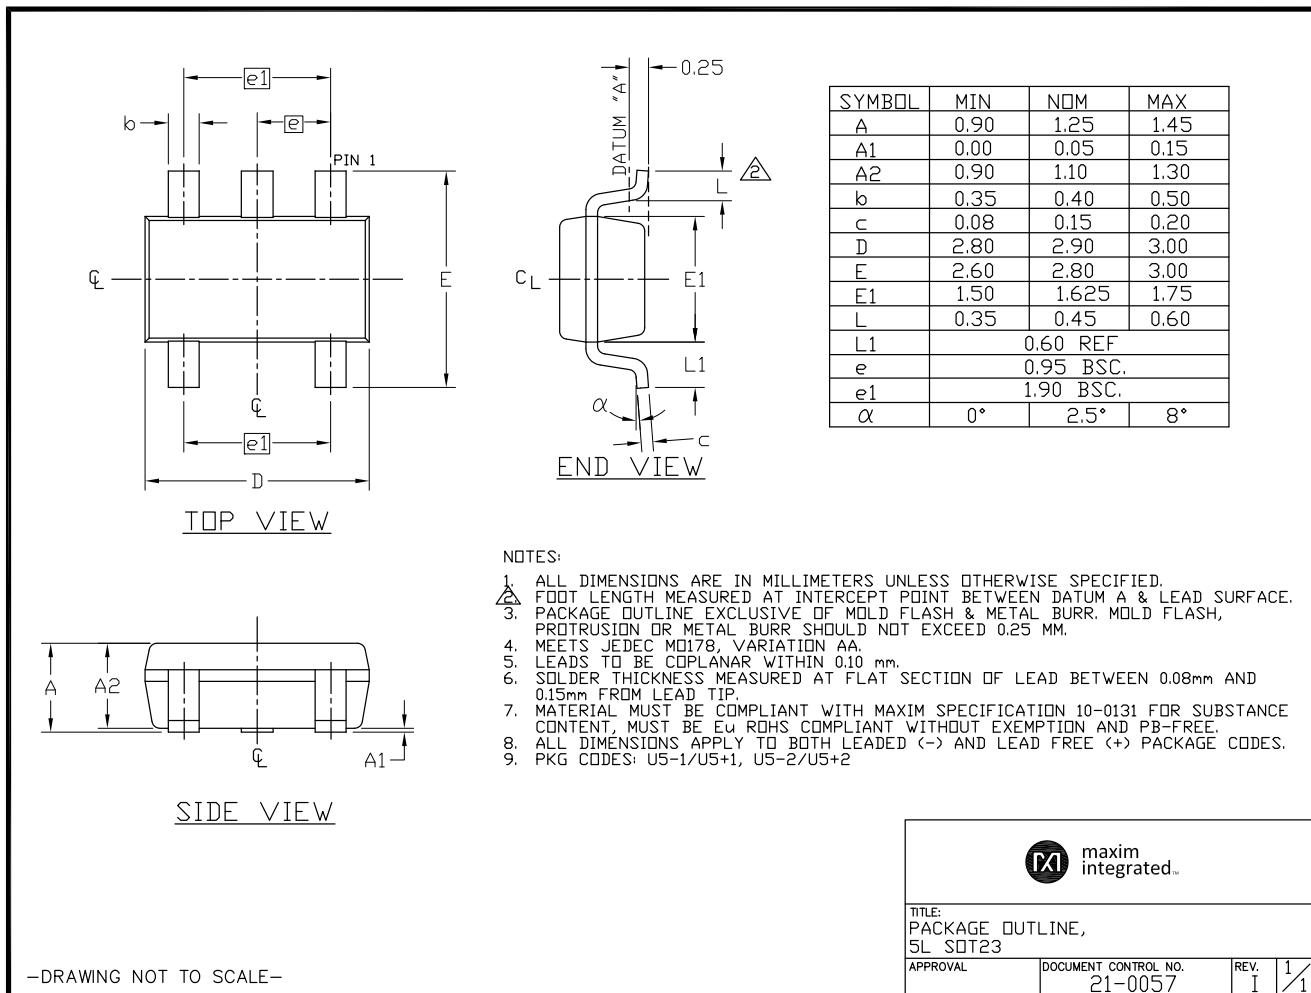
Package Information (continued)

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a “+”, “#”, or “-” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.



Package Information (continued)

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a “+”, “#”, or “-” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.



Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	7/08	Initial release	—
1	10/08	Removed future part reference from 5 SOT23 package	1
2	1/11	Added G45 designation	1
3	8/15	Corrected error in <i>Typical Operating Circuit</i>	1
4	3/17	Updated title to include "nanoPower" and updated package outline drawings	1–10

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.