


## T90 Series, 30A PCB Relay

- 30A, 1 Form A (NO); 20A, 1 Form C (CO)
- Available as open frame or sealed construction
- Meets UL 508 and 873 Spacing - 3.18 through air, 6.36 over surface
- UL class F insulation system standard

Typical applications  
HVAC, Appliances, Industrial Controls

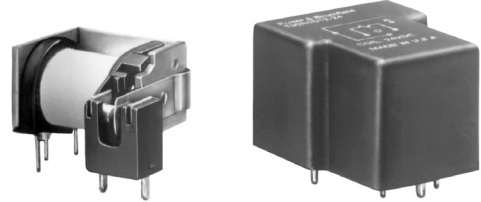

### Approvals

UL E22575; CSA LR15734  
Technical data of approved types on request

### Contact Data

Contact arrangement	1 form A (NO), 1 form B (NC), 1 form C (CO)
Rated voltage	277VAC
Max. switching voltage	277VAC
Rated current	30A
Limiting continuous current	30A
Limiting making current	30A
Limiting breaking current	30A
Contact material	AgCdO
Min. recommended contact load	1A, 5VDC or 12VAC
Initial contact resistance	75 mΩ at 1A at 5VDC or 12VAC
Frequency of operation, with load	360hr
Operate/release time max., including bounce	15/15ms

### Contact ratings

Type	Load	Cycles
<b>Typical</b>		
AgCdO, open style relay		
NO	30A, 240VAC, general purpose	100x10 <sup>3</sup>
NO	20A, 240VAC, resistive heater	100x10 <sup>3</sup>
CO	20A/10A, 240VAC, general purpose	100x10 <sup>3</sup>
CO	20A/10A, 28VDC, resistive	100x10 <sup>3</sup>

### UL 508/873

AgCdO		
NO	30A, 240VAC, general purpose	100x10 <sup>3</sup>
NC	15A, 240VAC, general purpose	100x10 <sup>3</sup>
CO	20A/10A, 240VAC, general purpose	100x10 <sup>3</sup>
NO	20A, 240VAC, resistive	100x10 <sup>3</sup>
NC	15A, 240VAC, resistive	100x10 <sup>3</sup>
CO	20A/10A, 240VAC, resistive	100x10 <sup>3</sup>
NO	80LRA/30FLA, 240VAC	30x10 <sup>3</sup>
NC	30LRA/10FLA, 240VAC	30x10 <sup>3</sup>
CO	53.6LRA/20FLA / 20LRA/6.7FLA, 240VAC	100x10 <sup>3</sup>
NO	98LRA/22FLA, 120VAC	100x10 <sup>3</sup>
NO	2HP, 240VAC	1x10 <sup>3</sup>
NC	1/2HP, 240VAC	1x10 <sup>3</sup>
NO	1HP, 120VAC	1x10 <sup>3</sup>
NC	1/4HP, 120VAC	1x10 <sup>3</sup>
NO	6A, 277VAC, ballast	100x10 <sup>3</sup>
NC	3A, 277VAC, ballast	6x10 <sup>3</sup>
NO	TV5, 240VAC, tungsten	6x10 <sup>3</sup>
NC	TV3, 240VAC, tungsten	6x10 <sup>3</sup>
NO	20A, 28VDC, resistive	100x10 <sup>3</sup>
NC	10A, 28VDC, resistive	100x10 <sup>3</sup>

All ratings at 25°C (unless otherwise noted) with relay properly vented. Remove vent nib from enclosed relays after soldering and cleaning for optimum life.

Mechanical endurance	10x10 <sup>6</sup> ops.
----------------------	-------------------------

### Coil Data


Coil voltage range	5 to 110VDC
Max. coil power	1.0W
Max. coil temperature	155°C
Coil insulation system according UL	Class F

### Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power W
5	5	3.75	0.5	27	900
6	6	4.5	0.6	40	900
9	9	6.75	0.9	97	900
12	12	9	1.2	155	900
18	18	13.5	1.8	380	900
24	24	18	2.4	660	900
48	48	36	4.8	2560	900
110	110	82.5	11	13450	900

All figures are given for coil without preenergization, at ambient temperature +23°C.

### Ambient temperature vs. coil voltage – 1W coil

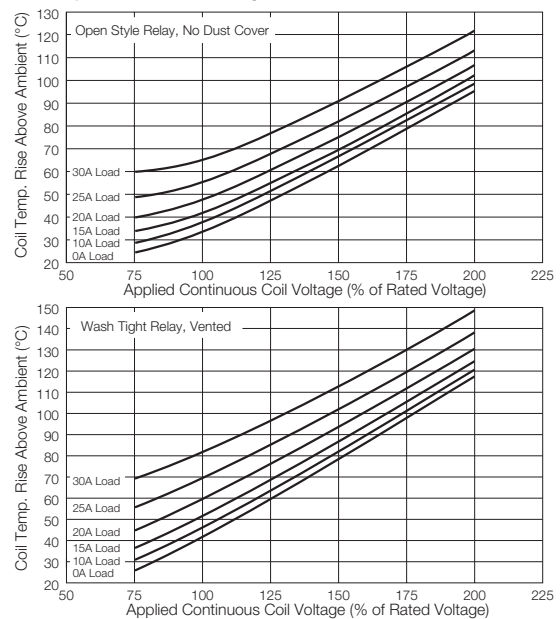

Data graphed above are average values and should be verified in application. Tests were conducted within a 2' (.6m) cube (still air); at nominal coil power @ 25°C; with normally open contact loaded; and with 4' (1.22m) long, #10AWG load wires. P.C. board relays were mounted to a 30A, single side P.C. board. Coil rise test conducted with a 30A PC board to maintain 20°C max. rise at 30°C. The relay connections and wiring must be designed with an adequate cross section to ensure proper current flow and heat dissipation. After cleaning process knock-off nib should be removed for optimum life of wash-tight relays.

**T90 Series, 30A PCB Relay (Continued)**

**Insulation Data**

Initial dielectric strength	
between open contacts	1500V <sub>rms</sub>
between contact and coil	1500V <sub>rms</sub>
Initial insulation resistance	
between insulated elements	1x10 <sup>9</sup> Ω
Clearance/creepage	
between contact and coil	3.17mm

**Other Data**

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customersupport/rohssupportcenter](http://www.te.com/customersupport/rohssupportcenter)

Ambient temperature  
DC coil -55°C to 85°C <sup>1)</sup>

Category of environmental protection  
IEC 61810 RT0 - open, RTII - flux proof

**Other Data (continued)**

Vibration resistance (functional)	1.65mm max excursions, 10-55 Hz
Shock resistance (functional)	10g for 11msec
Shock resistance (destructive)	100g
Terminal type	pcb-tht
Weight	20g open relay 26g wash-tight relay


Resistance to soldering heat THT  
IEC 60068-2-20 250°C

Packaging/unit tray/50 pcs., box/500 pcs.


1) Operating ambient temperature must consider "Must Operate Voltage Change Over Temperature," Contact Temperature Rise, Coil Temperature Rise (If coil is not allowed to cool) and Maximum Coil Temperature. Specification ambient considers 20A load with coil cooled to ambient.

**Dimensions**

T90N

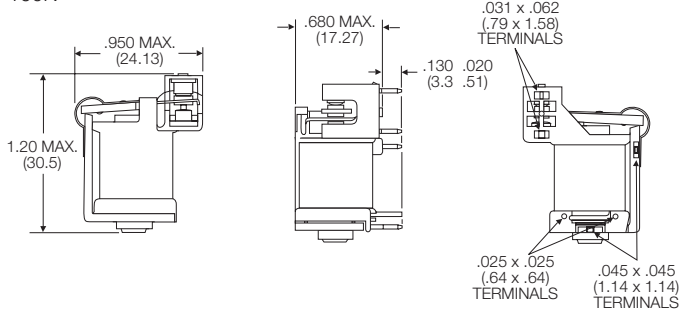


T90S

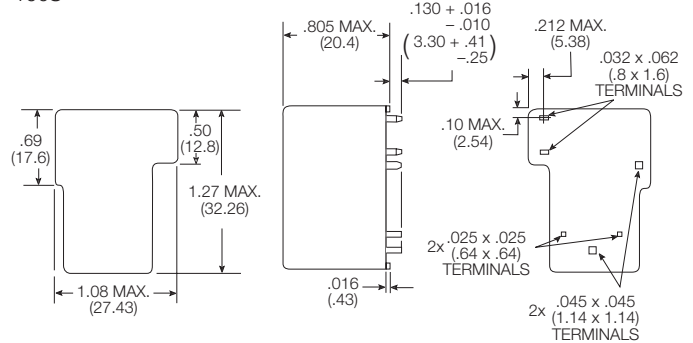


**Terminal assignment**

Bottom view on pins

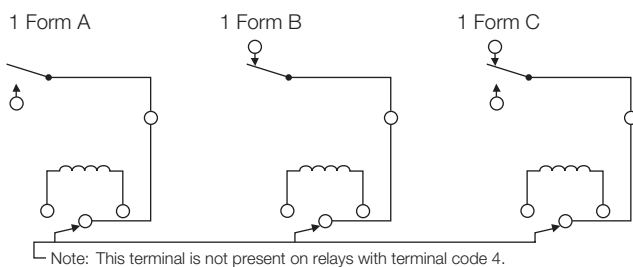

**PCB layout**

Bottom view on pins

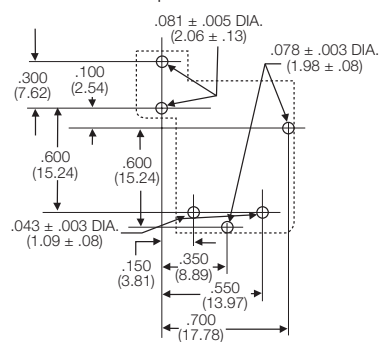


Only necessary terminals are present on single throw models and terminal code 4 models. Consequently, some holes will be unnecessary for those models.

**Accessory**

Optional plastic dust cover is a snap-on unit, open on the PC board side of the relay. The cover, when ordered with the relay, is shipped separately. It is designed to be snapped into place by the customer after the relay has been assembled to the PC board.

Product Code	Description	Part Number
35C620A	Black dust cover, for use on T90N relay	4-1393209-2

35C620A

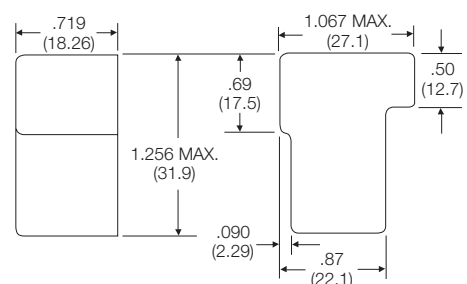

**T90 Series, 30A PCB Relay (Continued)**
**Product code structure**

Typical product code

**T90 S 5 D 1 2 -24**
**Type**
**T90** Power PCB relay T90

**Enclosure**
**N** Open, no enclosure (snap-on dust cover available as an option)

**S** Wash-tight, sealed plastic case with knock off nib for ventilation

**Contact arrangement**
**1** 1 form A (1 NO)

**2** 1 form B (1 NC)

**5** 1 form C (1 CO)

**Coil Input**
**D** DC voltage

**Mounting and termination**
**1** PCB terminals

**4** PCB terminals, no common terminal between coil terminals (see pcb layout/terminal assignment drawing)

Note: Terminal code 4 recommended for UL 873 applications. Consult factory for use of terminal code 1 for UL 873 applications.

**Contact material**
**2** AgCdO

**Coil voltage**

Coil code: please refer to coil versions table

Product Code	Enclosure	Contacts	Terminals	Contact Material	Coil	Part Number			
T90N1D12-5	open, no cover	1 form A, 1 NO	pcb	AgCdO	5 VDC	7-1393208-4			
T90N1D12-9					9 VDC	7-1393208-5			
T90N1D12-12					12 VDC	6-1393208-5			
T90N1D12-18					18 VDC	6-1393208-8			
T90N1D12-24					24 VDC	7-1393208-0			
T90N1D12-48					48 VDC	7-1393208-3			
T90N1D12-110					110 VDC	6-1393208-4			
T90N1D42-12			pcb, no extra COM		12 VDC	7-1393208-7			
T90N1D42-24					24 VDC	7-1393208-9			
T90N5D12-5			1 form C, 1 CO		pcb		5 VDC	9-1393208-5	
T90N5D12-12							12 VDC	8-1393208-6	
T90N5D12-18							18 VDC	9-1393208-0	
T90N5D12-24							24 VDC	9-1393208-3	
T90N5D12-48							48 VDC	9-1393208-4	
T90N5D12-110	110 VDC	8-1393208-5							
T90N5D42-12				pcb, no extra COM				12VDC	9-1393208-9
T90N5D42-24			24 VDC		1393209-2				
T90S1D12-5			wash tight	1 form A, 1 NO	pcb			5 VDC	1-1393209-8
T90S1D12-6								6 VDC	1-1393209-9
T90S1D12-9								9 VDC	2-1393209-0
T90S1D12-12								12 VDC	1-1393209-2
T90S1D12-18								18 VDC	1-1393209-3
T90S1D12-24	24 VDC	1-1393209-6							
T90S1D42-12							pcb, no extra COM		12 VDC
T90S1D42-24			24 VDC	2-1393209-5					
T90S1D42-48			48 VDC	2-1393209-6					
T90S5D12-5			1 form C, 1 CO	pcb		5 VDC	3-1393209-4		
T90S5D12-12						12 VDC	2-1393209-8		
T90S5D12-18						18 VDC	3-1393209-0		
T90S5D12-24						24 VDC	3-1393209-1		
T90S5D12-48	48 VDC	3-1393209-3							
T90S5D42-12						pcb, no extra COM		12 VDC	1423094-1
T90S5D42-18								18 VDC	3-1393209-8
T90S5D42-24					24 VDC	4-1393209-0			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.