



### FEATURES

- UL 60950 recognised
- 4:1 Wide range voltage input
- Operating temperature range -40°C to 105°C with derating
- 1kVDC Isolation “Hi Pot Test”
- 3.3V, 5V & 12V outputs
- No electrolytic capacitors
- Continuous short circuit protection

### PRODUCT OVERVIEW

The NCS1 series of DC/DC converters offers a single output voltage from input voltage ranges of 4.5-18V and 9-36V. The NCS1 is housed in an industry standard package with a standard pinout.

Applications include telecommunications, battery powered systems, process control and distributed power systems.

### SELECTION GUIDE

| Order Code  | Input Voltage | Output Voltage | Output Current | Efficiency 5V or 24V Input. |        | Efficiency 12V Input. |        | Ripple and Noise |            | Isolation Capacitance | MTTF <sup>1</sup> |
|-------------|---------------|----------------|----------------|-----------------------------|--------|-----------------------|--------|------------------|------------|-----------------------|-------------------|
|             | Nom. V        | V              | mA             | Min. %                      | Typ. % | Min. %                | Typ. % | Typ. mVp/p       | Max. mVp/p |                       |                   |
| NCS1S1203SC | 12            | 3.3            | 303            | 73                          | 77     | 71                    | 75     | 24               | 70         | 24                    | 1020              |
| NCS1S1205SC | 12            | 5              | 200            | 76                          | 79     | 74                    | 77     | 25               | 50         | 30                    | 915               |
| NCS1S1212SC | 12            | 12             | 83             | 75                          | 78     | 75                    | 79     | 40               | 120        | 35                    | 1130              |
| NCS1S2403SC | 24            | 3.3            | 303            | 76                          | 78.5   | 73                    | 76     | 35               | 70         | 28                    | 1217              |
| NCS1S2405SC | 24            | 5              | 200            | 79                          | 82     | 77                    | 80     | 27               | 50         | 42                    | 1022              |
| NCS1S2412SC | 24            | 12             | 83             | 80                          | 83     | 77                    | 80     | 28               | 120        | 42                    | 943               |

### INPUT CHARACTERISTICS

| Parameter                      | Conditions      | Min.              | Typ. | Max. | Units  |
|--------------------------------|-----------------|-------------------|------|------|--------|
| Voltage range                  | 12V input types | 4.5               | 12   | 18   | V      |
|                                | 24V input types | 9                 | 24   | 36   |        |
| Input current                  | NCS1S12XX       | 5V input voltage  |      | 0.26 | A      |
|                                |                 | 12V input voltage |      | 0.1  |        |
|                                | NCS1S24XX       | 12V input voltage |      | 0.1  |        |
|                                |                 | 24V input voltage |      | 0.05 |        |
| Input reflected ripple current | NCS1S12XX       |                   | 5    | 30   | mA p-p |
|                                | NCS1S24XX       |                   | 5    | 15   |        |

### OUTPUT CHARACTERISTICS

| Parameter                                    | Conditions                                      | Min. | Typ. | Max. | Units             |
|--|---|------|------|------|-------------------|
| Rated power                                  | All output types                                |      |      | 1    | W                 |
| Minimal load to meet datasheet specification |   | 10   |      |      | %                 |
| Voltage set point accuracy                   | All output types                                |      | ±1   | ±2   | %                 |
| Line regulation                              | Low line to high line                           |      |      | ±0.5 | %                 |
| Load regulation                              | All output types                                |      |      | 0.5  | %                 |
| Transient response                           | Peak deviation (12.5-37.5% & 37.5-12.5% swing)  |      |      | 5    | %V <sub>out</sub> |
|  | Settling time (within 5% V <sub>out</sub> Nom.) |      |      | 2    | ms                |

### ISOLATION CHARACTERISTICS

| Parameter              | Conditions                | Min. | Typ. | Max. | Units |
|------------------------|---------------------------|------|------|------|-------|
| Isolation test voltage | Flash tested for 1 second | 1000 |      |      | VDC   |
| Resistance             | Viso = 1kVDC              | 1    |      |      | GΩ    |

### GENERAL CHARACTERISTICS

| Parameter           | Conditions  | Min. | Typ. | Max. | Units |
|---------------------|---|------|------|------|-------|
| Switching frequency |   | 100  |      | 400  | kHz   |
| Control pin input   | Module on, pin unconnected or open collector floating |      |      |      |       |
|                     | Module off  |      |      | 0.8  | V     |



For full details go to [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

<sup>1</sup> Calculated using MIL-HDBK-217 FN2, parts stress method with nominal input voltage at full load.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

### TEMPERATURE CHARACTERISTICS

| Parameter                           | Conditions                          | Min. | Typ. | Max. | Units |
|-------------------------------------|-------------------------------------|------|------|------|-------|
| Operation                           |                                     | -40  |      | 105  | °C    |
| Storage                             |                                     | -50  |      | 125  |       |
| Case temperature rise above ambient | 100% Load, Nom $V_{IN}$ , Still Air |      | 15   | 22   |       |

### ABSOLUTE MAXIMUM RATINGS

|  |            |
|--|------------|
| Short-circuit protection (for SELV input voltages)                           | Continuous |
| Control pin input voltage  | 18V Max    |
| Lead temperature 1.0mm from case for 10 seconds (to JEDEC JESD22-B106 ISS C) | 260°C      |
| Input voltage, NCS1 12V input types  | 25V        |
| Input voltage, NCS1 24V input types  | 40V        |

### APPLICATION NOTES

#### Maximum Output Capacitance

Maximum output capacitance should not exceed:

| Output Voltage | Maximum Load Capacitance |
|----------------|--------------------------|
| V              | µF                       |
| 3.3            | 470                      |
| 5              | 470                      |
| 12             | 220                      |


#### Start-up times

Typical start up times for this series, with a typical input voltage rise time of 2.2µs and output capacitance of 10µF, are shown in the table below. The product series will start into the maximum output capacitance with increased start times.

| Part No.           | Start-up times |
|--------------------|----------------|
|                    | ms             |
| <b>NCS1S1203SC</b> | 6              |
| <b>NCS1S1205SC</b> | 9              |
| <b>NCS1S1212SC</b> | 20             |
| <b>NCS1S2403SC</b> | 12             |
| <b>NCS1S2405SC</b> | 7              |
| <b>NCS1S2412SC</b> | 12             |

#### Control Pin

The NCS1 converters have a shutdown feature which enables the user to put the converter into a low power state. The control pin connects directly to the base of an internal transistor, and the switch off mechanism for the NCS1 works by forward biasing this NPN transistor. If the pin is left open (high impedance), the converter will be ON (there is no allowed low state for this pin), but once a control voltage is applied with sufficient drive current, the converter will be switched OFF. A suitable application circuit is shown below.

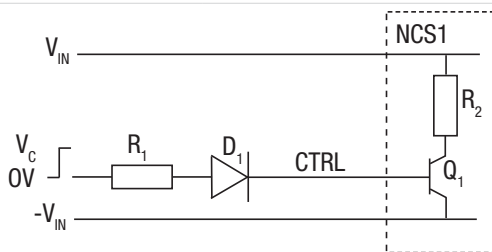

$D_1$  (e.g. 1N4003) is required to provide high impedance when the signal is low. From the NCS1 specification, the drive current to operate this function is recommended to be 3mA, and hence the value of  $R_1$  can be derived as follows:

$$R_1 = \frac{V_c - V_D - V_Q}{I_c}$$

Assuming  $V_c=5V$ ,  $V_D=0.7V$  and  $V_Q=1V$ :

$$R_1 = \frac{5 - 0.7 - 1.0}{3 \times 10^{-3}} = 1100\Omega$$

## TECHNICAL NOTES

### ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NCS1 series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The NCS1 has been recognized by Underwriters Laboratory for functional insulation, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

### REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NCS1 series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

## SAFETY APPROVAL

The NCS1 series has been recognized by Underwriters Laboratory (UL) to UL 60950 for functional insulation to a maximum case temperature of 105°C. File number E151252 applies.

The NCS1 Series of converters are not internally fused so to meet the requirements of UL 60950 an anti-surge input line fuse should always be used with ratings as defined below.

NCS1S12xxSC: 1A

NCS1S24xxSC: 0.5A

All fuses should be UL approved and rated to at least the maximum allowable DC input voltage.

## RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. The pin termination finish on this product series is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems.

## CHARACTERISATION TEST METHODS


### Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

|       |  |
|-------|--|
| C1    | 1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC/DC converter                                |
| C2    | 10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC/DC converter with an ESR of less than 100mΩ at 100 kHz |
| C3    | 100nF multilayer ceramic capacitor, general purpose  |
| R1    | 450Ω resistor, carbon film, ±1% tolerance  |
| R2    | 50Ω BNC termination  |
| T1    | 3T of the coax cable through a ferrite toroid  |
| RLOAD | Resistive load to the maximum power rating of the DC/DC converter. Connections should be made via twisted wires  |


Measured values are multiplied by 10 to obtain the specified values.

### Differential Mode Noise Test Schematic

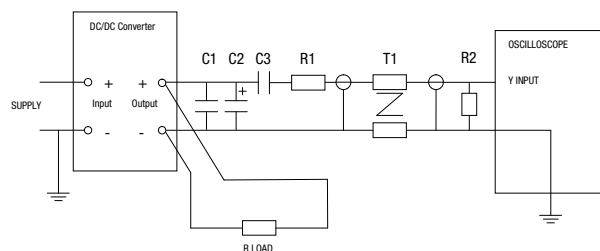


**EFFICIENCY VS LOAD**


**NCS1S1203SC**

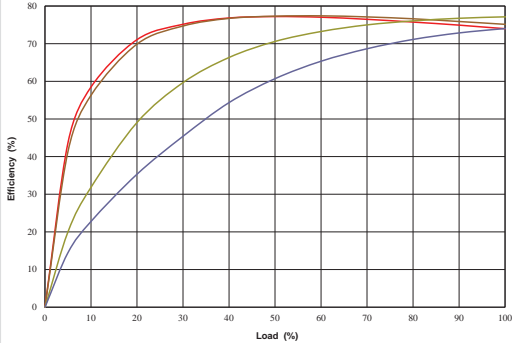


**NCS1S1205SC**

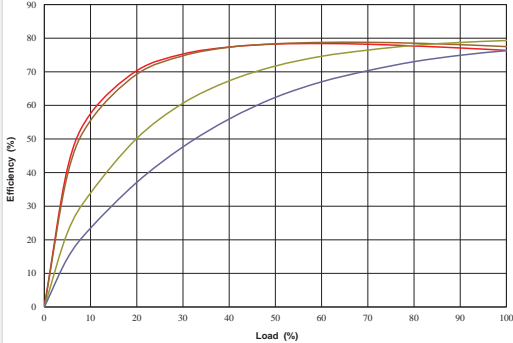


**NCS1S1212SC**

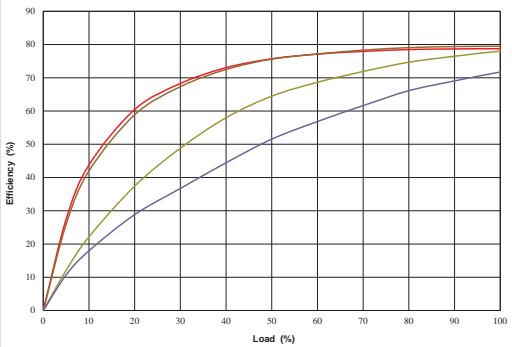


**NCS1S2403SC**

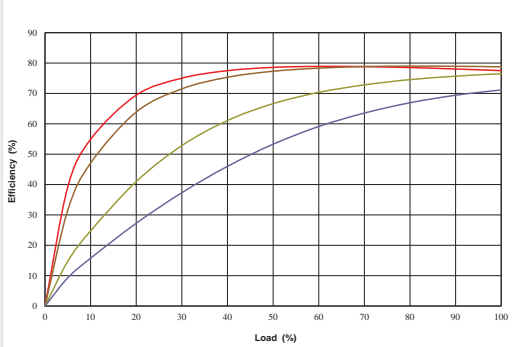

**NCS1S2405SC**

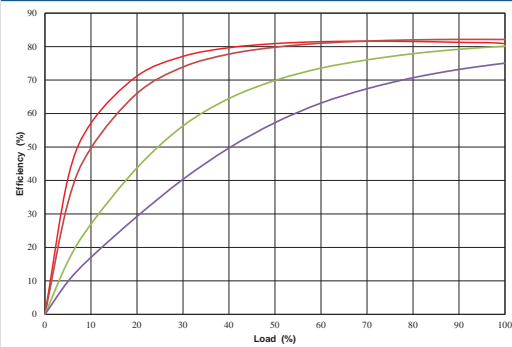


**NCS1S2412SC**

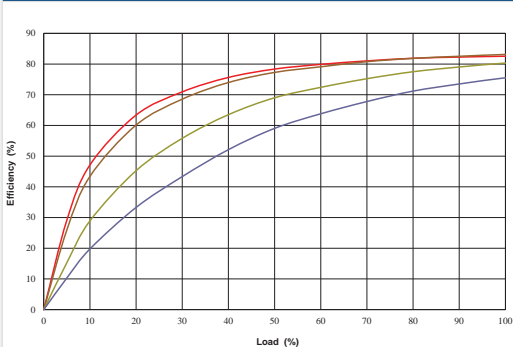


**TEMPERATURE DERATING**


**NCS1S1203SC**

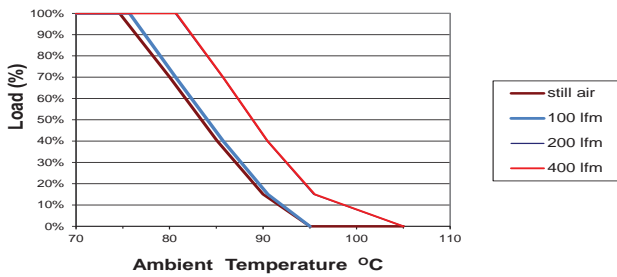


**NCS1S1205SC**

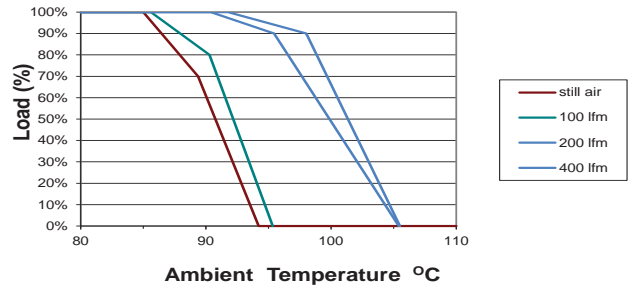


**NCS1S1212SC**

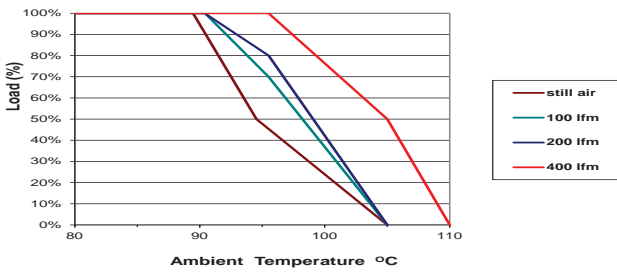


**NCS1S2403SC**

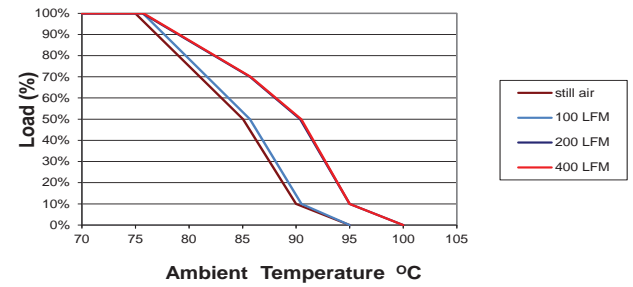

**NCS1S2405SC**

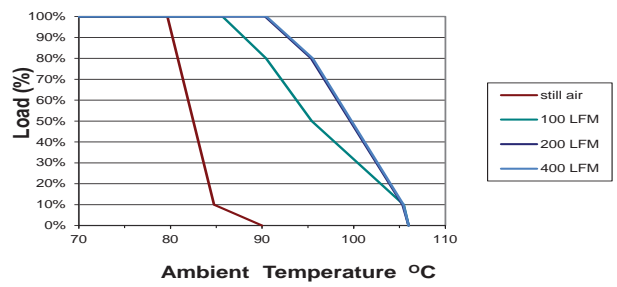

**NCS1S2412SC**

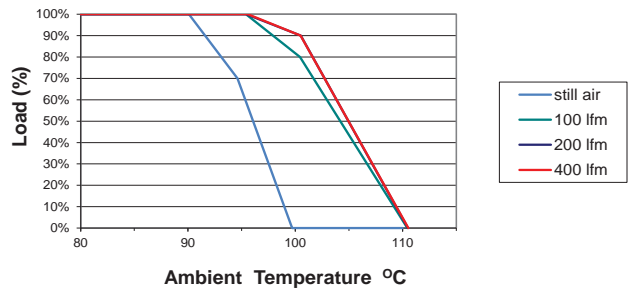

## EMC FILTERING AND SPECTRA


### FILTERING

The module includes a basic level of filtering, the following table shows the additional input capacitor and input inductor typically required to meet EN 55022 Curve A Quasi-Peak EMC limit, as shown in the following plots.


| Part Number        | Capacitor | Inductor | Common Mode Choke |
|--------------------|-----------|----------|-------------------|
| <b>NCS1S1203SC</b> | 330nF     | 500µH    |                   |
| <b>NCS1S1205SC</b> | 330nF     | 500µH    |                   |
| <b>NCS1S1212SC</b> | 2.2µF     | 2.2mH    |                   |
| <b>NCS1S2403SC</b> | 330nF     | 500µH    | 700µH             |
| <b>NCS1S2405SC</b> | 330nF     | 500µH    |                   |
| <b>NCS1S2412SC</b> | 330nF     | 500µH    |                   |

**EMC FILTERING AND SPECTRA**


**NCS1S1203SC**

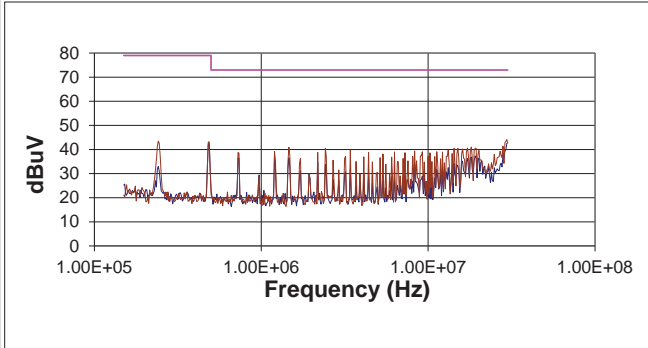


**NCS1S1205SC**

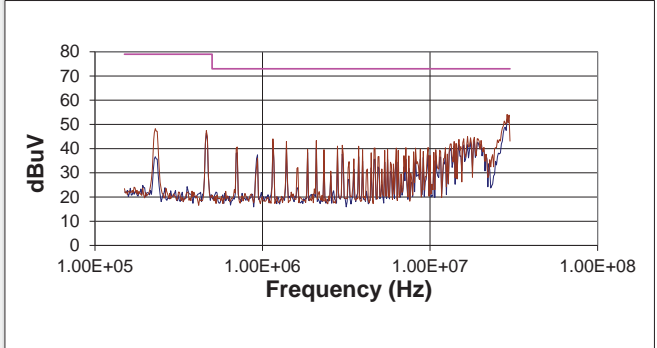


**NCS1S1212SC**

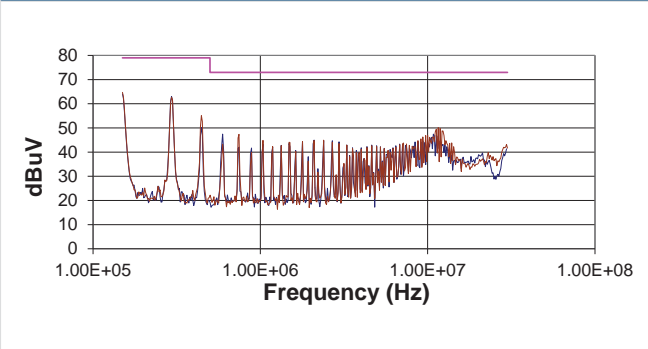


**NCS1S2403SC**

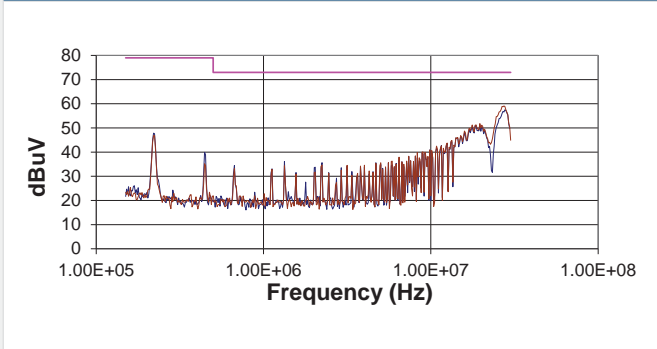

**NCS1S2405SC**

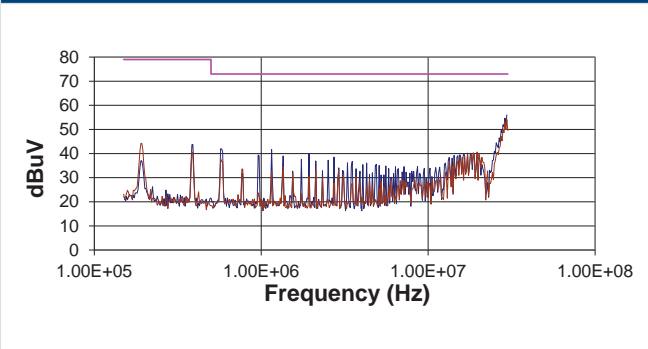


**NCS1S2412SC**

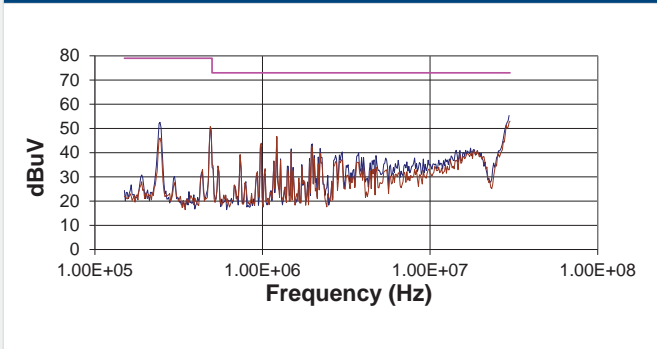

**PACKAGE SPECIFICATIONS**

**MECHANICAL DIMENSIONS**

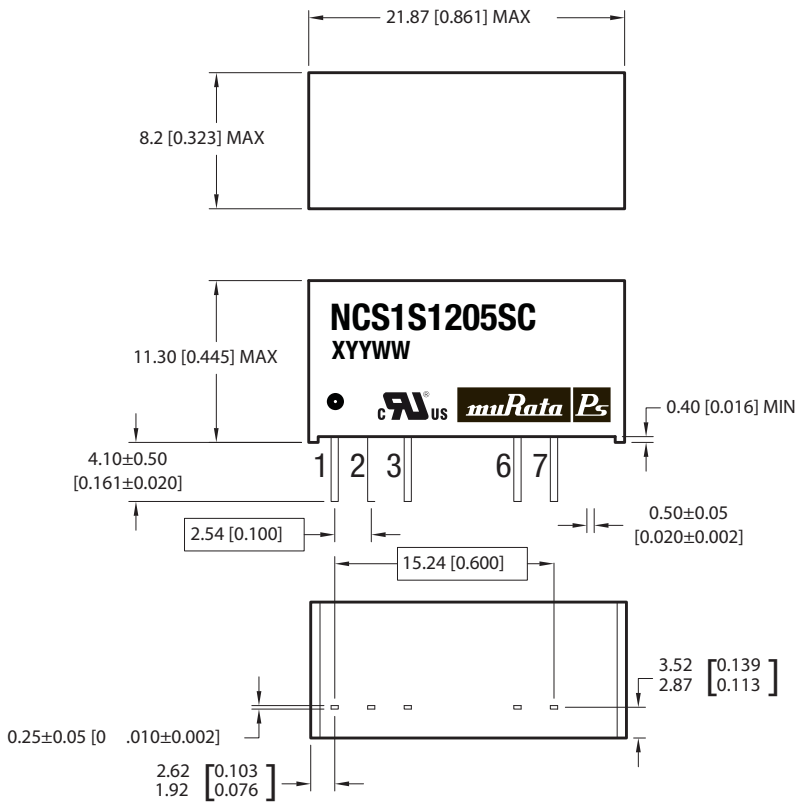


All dimensions in millimetres (inches)  $\pm 0.5$  (0.020) except pin to pin tolerance  $\pm 0.25$  (0.010).  
All pins on a 2.54 (0.100) pitch and within 0.25 (0.010) of true position.

Weight: 3.3g

**PIN CONNECTIONS**

| Pin | Function |
|-----|----------|
|     | Single   |
| 1   | -VIN     |
| 2   | +VIN     |
| 3   | Control  |
| 6   | +VOUT    |
| 7   | -VOUT    |


**TUBE OUTLINE DIMENSIONS**



All dimensions in millimetres  $\pm 0.5$  (inches  $\pm 0.01$ ).  
Tube length: 520  $\pm 2$  (20.47 inches  $\pm 0.079$ ).

Quantity: 23

**RECOMMENDED FOOTPRINT DETAILS**

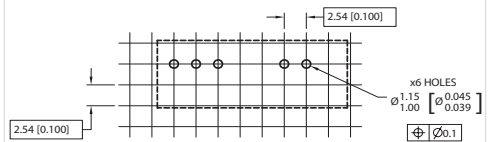

All dimensions in mm (inches)  $\pm 0.25$  ( $\pm 0.010$ ).

Murata Power Solutions, Inc.  
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
ISO 9001 and 14001 REGISTERED



This product is subject to the following **operating requirements** and the **Life and Safety Critical Application Sales Policy**:  
Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.  
© 2015 Murata Power Solutions, Inc.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.