
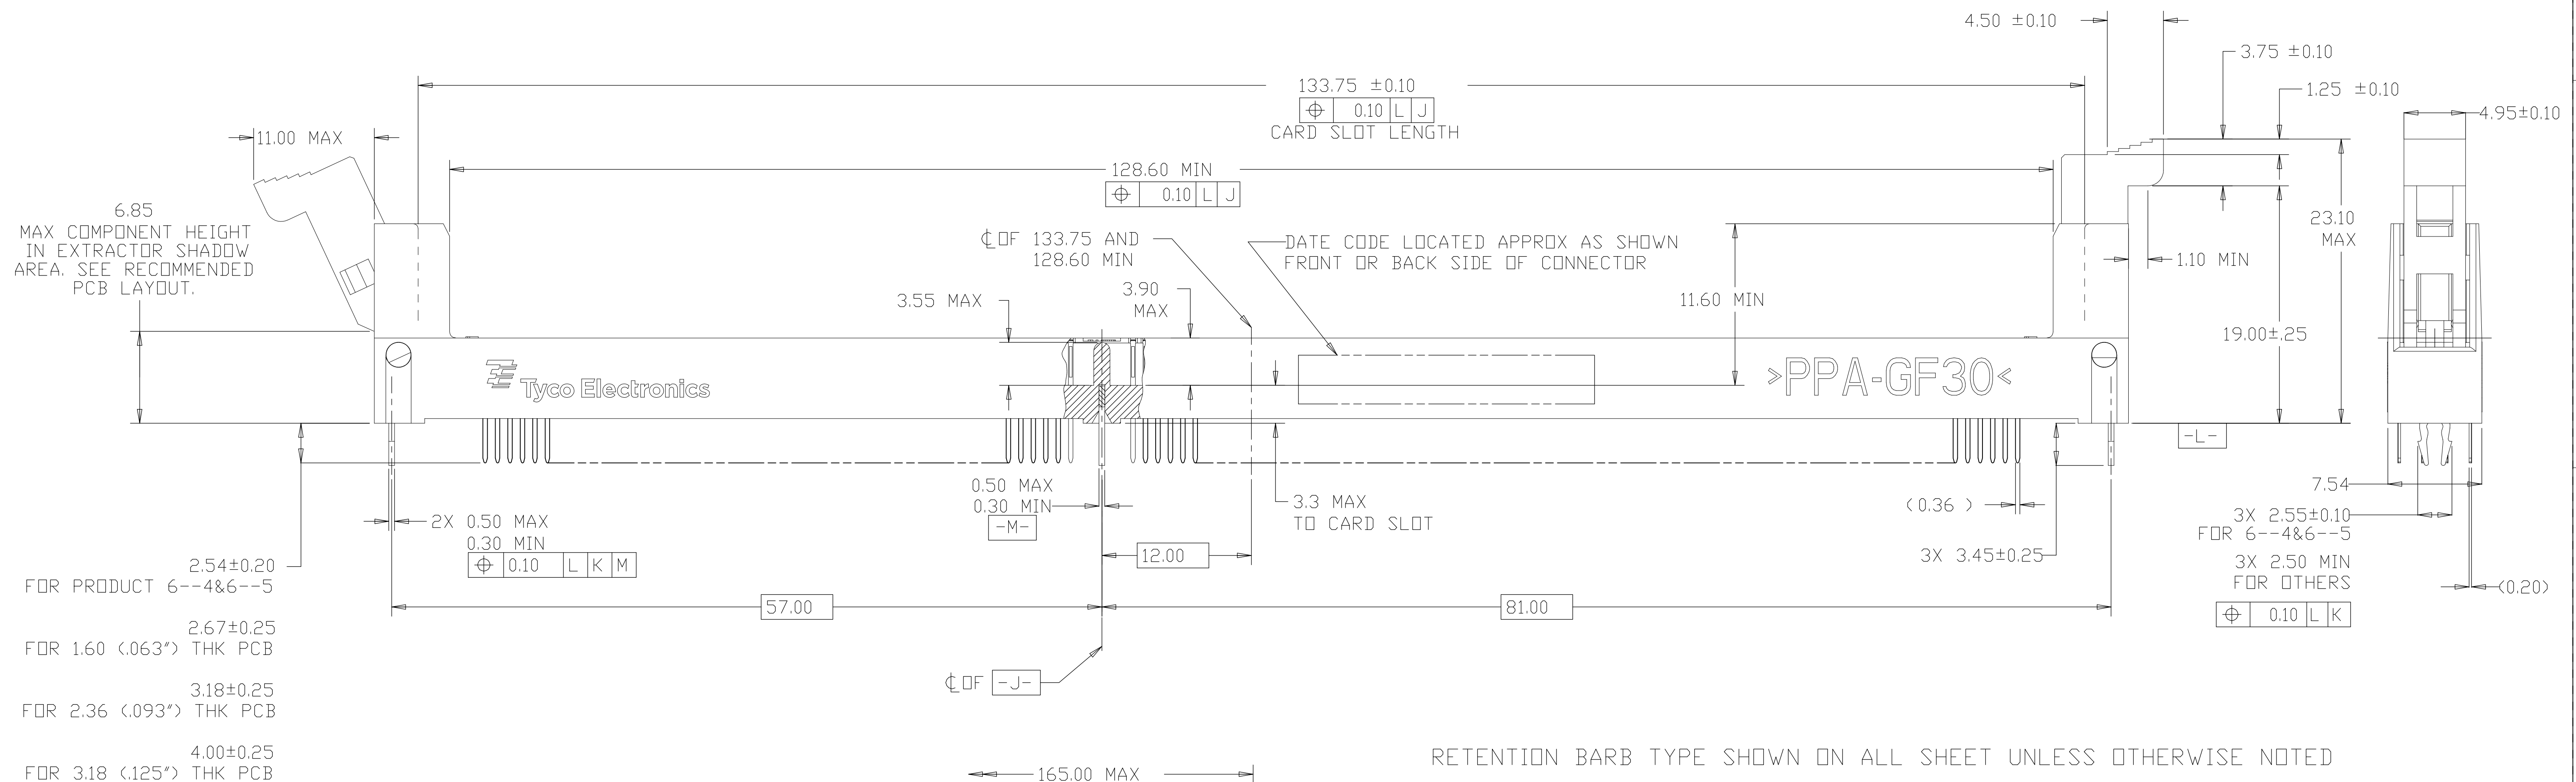


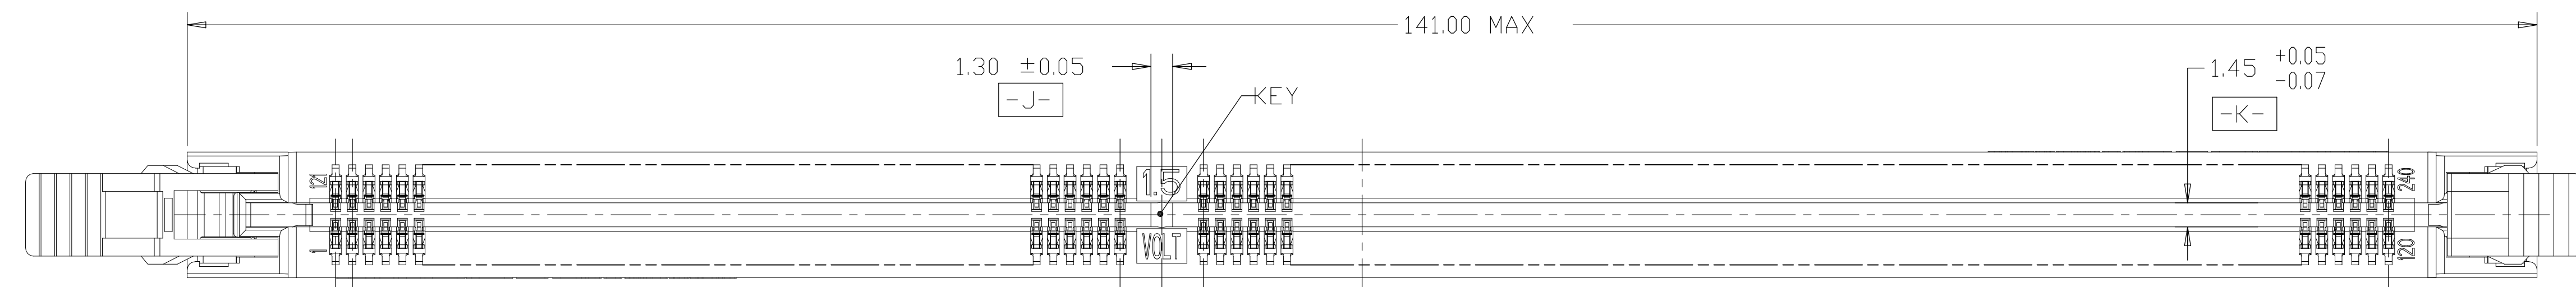

RETENTION BARB TYPE SHOWN ON ALL SHEET UNLESS OTHERWISE NOTED

 MATERIALS:

HOUSING: HIGH TEMPERATURE NYLON, UL94 V-0
EXTRACTOR: HIGH TEMPERATURE NYLON, UL94 V-0
CONTACTS: COPPER ALLOY
RETENTION BARB: BRASS, TIN PLATED

2 INTERFACE FINISH:

(1) 0.00038 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.
(2) 0.00008 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.
(3) 0.00076 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.

△₃ FINISHED HOLE SIZE. 0.15 MAXIMUM ANNULAR RING.

4 KEEP OUT ZONE.


5 KEEP OUT AREA RESERVED FOR SOCKET EXTRACTORS, BOTH ENDS.


6 SOLDER TAIL FINISH:

0.00300 MIN THK MATTE TIN OVER 0.00127 MIN THK NICKEL.


 LED LOCATION AS APPLICABLE PER CUSTOMER.

 DATUM  IS CONNECTOR SIDE SURFACE OF PCB.

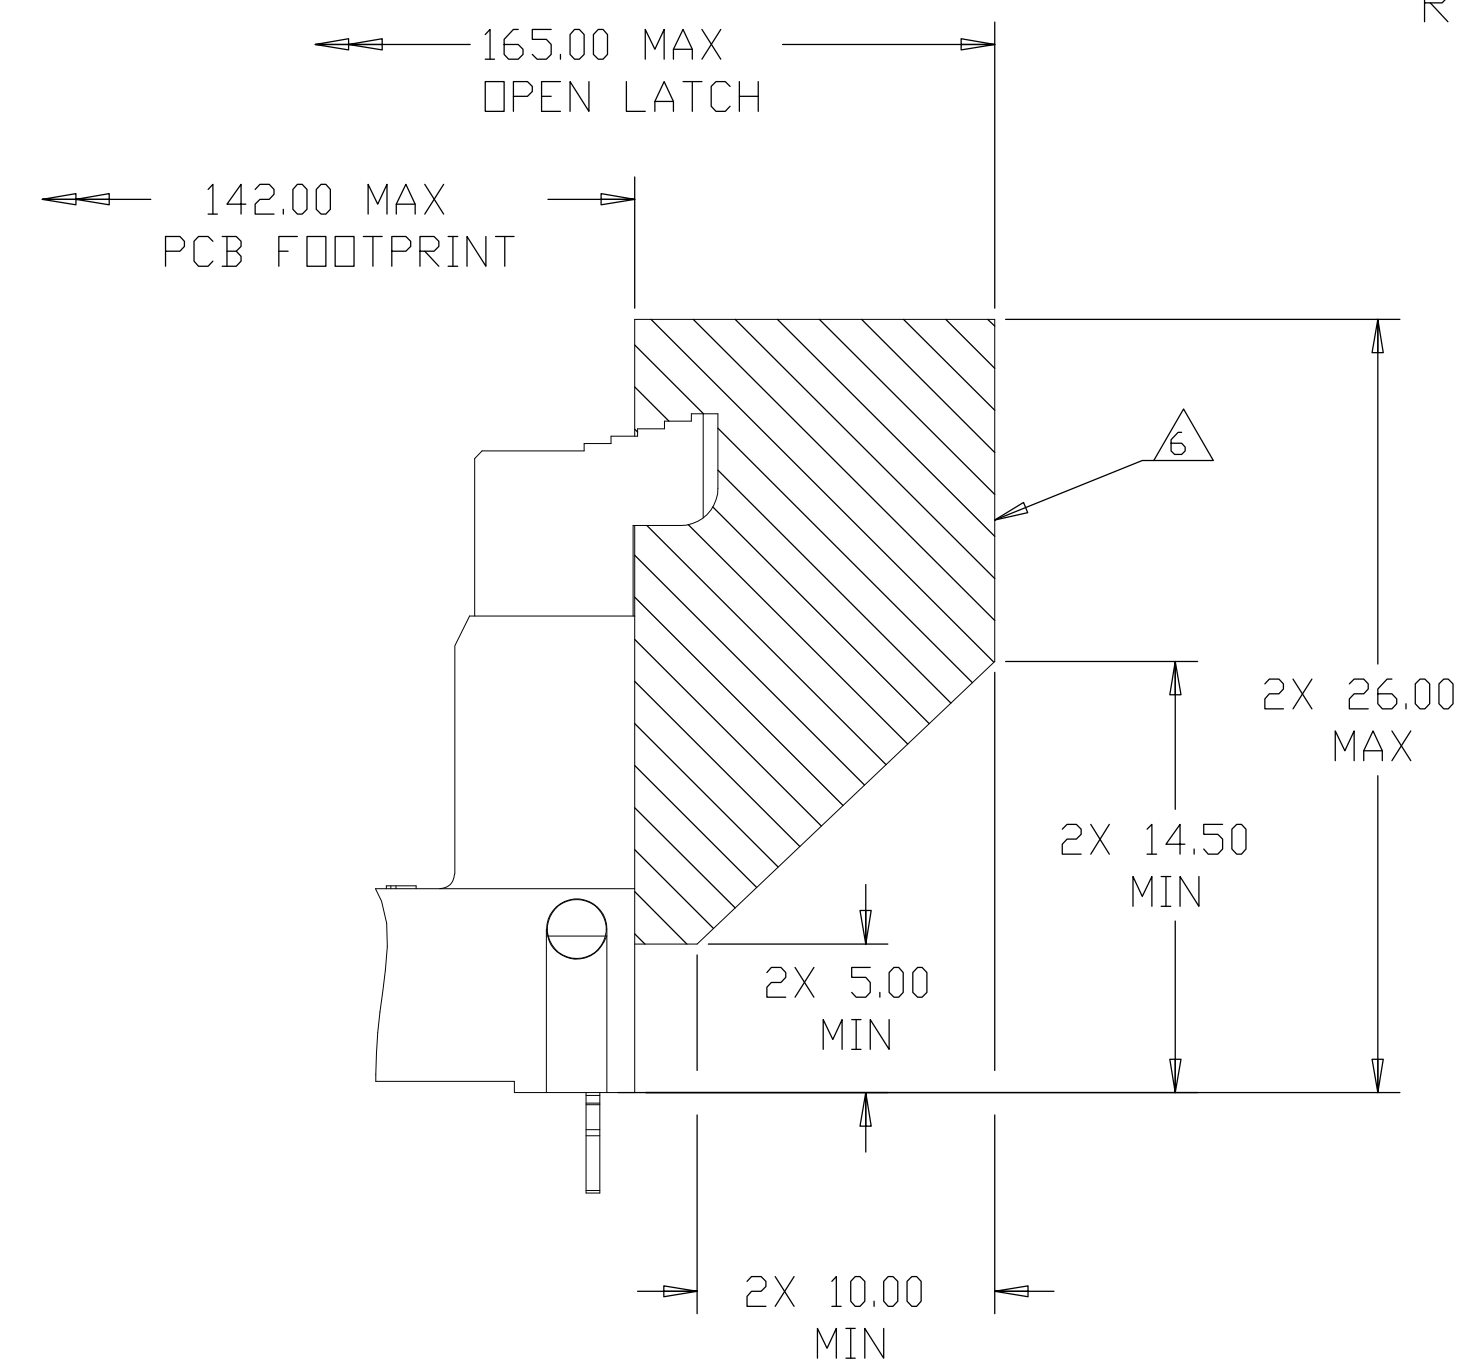

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: 28FB2007 LEO ZHOU CHK: 28FB2007 STEVEN YAO		 TE Connectivity	
DIMENSIONS: mm		APVD: 28FB2007 STEVEN YAO			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 		PRODUCT SPEC: 108-2256 APPLICATION SPEC: 114-13154		NAME: SOCKET ASSEMBLY, VERTICAL DDR3 DIMM, SOLDER TAIL, 240 POSITION	
MATERIAL: 		FINISH: 		SIZE: A1	CAGE CODE: 00779
		WEIGHT: -		DRAWING NO: C-1932000	
		CUSTOMER DRAWING		SCALE: 4:1 SHEET 1 of 4 REV: H7	


LOC	DIST	REVISIONS				
ES	00	REV	LTR	DESCRIPTION	DATE	OWN
				SEE SHEET 1		

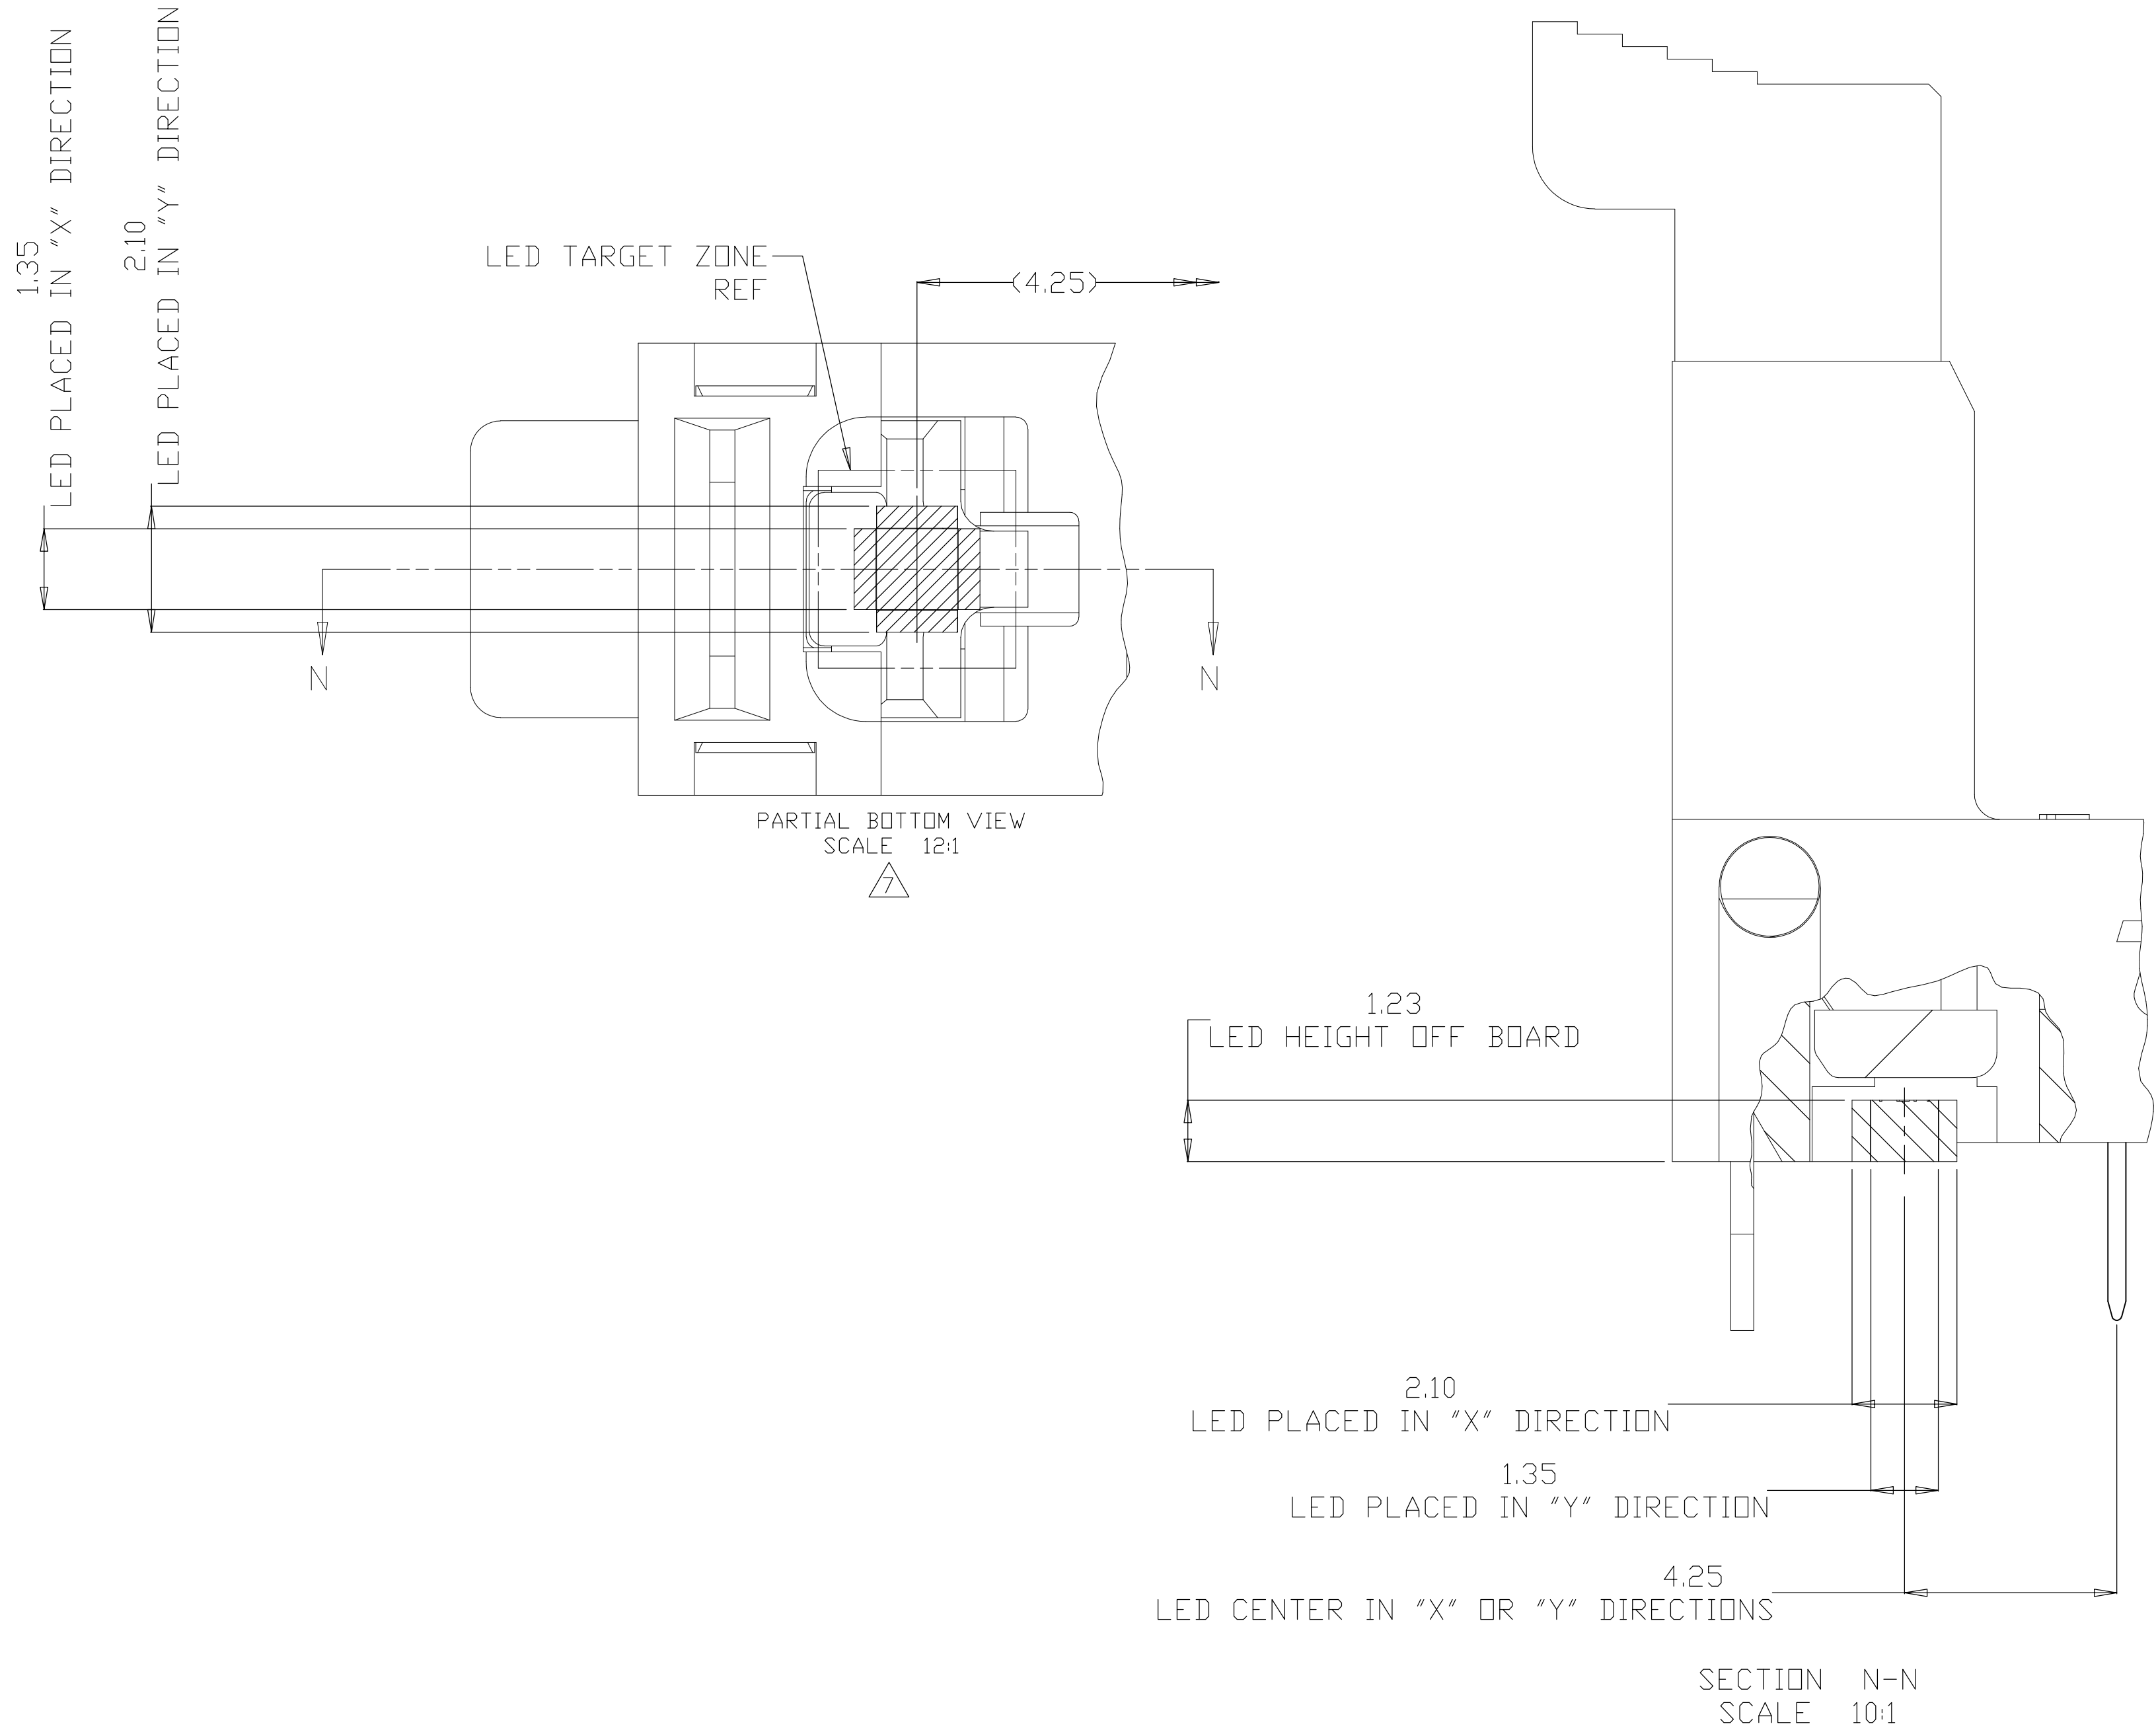

RETENTION BARB	BLACK	BLACK	0.00076 MIN (30u'')	2.54	7-1932000-6	
	NATURAL			2.54	7-1932000-5	
	NATURAL	BLUE(2935U)	0.00038 MIN(15u'')	2.67	7-1932000-2	
	NATURAL	PINK(701C)	0.00008 MIN (3u'', FLASH)	2.54	6-1932000-5	
		BLUE(284C)		2.54	6-1932000-4	
	BLACK	BLACK	0.00076 MIN (30u'')	4.00	5-1932000-2	
	NATURAL	BLACK		3.18	5-1932000-1	
				4.00	4-1932000-8	
				3.18	4-1932000-7	
	NATURAL	GREEN(368C) BLUE(284C) ORANGE(021C)	0.00038 MIN (15u'')	2.67	4-1932000-6	
				2.67	3-1932000-3	
				2.67	2-1932000-5	
	BLACK	BLACK	0.00038 MIN (15u'')	2.67	2-1932000-1	
				3.18	1-1932000-7	
			0.00008 MIN(3u'')	2.67	1-1932000-6	
	NATURAL	BLACK		4.00	1-1932000-5	
			0.00038 MIN (15u'')	3.18	1-1932000-1	
				2.67	1-1932000-0	
	0.00008 MIN(3u'')	2.67	1932000-7			
		NATURAL	NATURAL	0.00038 MIN (15u'')	4.00	1932000-6
					3.18	1932000-5
	0.00008 MIN (3u'', FLASH)			2.67	1932000-4	
		4.00	1932000-3			
3.18			1932000-2			
2.67	1932000-1					
HOUSING STYLE	EXTRACTOR COLOR	HOUSING COLOR	CONTACT GOLD INTERFACE	TAIL LENGTH	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LEO ZHOU 28FEB2007	TE Connectivity		
DIMENSIONS: mm		CHK STEVEN YAO 28FEB2007			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD STEVEN YAO 28FEB2007	NAME		
0 PLC ± - 1 PLC ± 0.5 2 PLC ± 0.13 3 PLC ± 0.013 4 PLC ± 0.0001 ANGLES ± -		PRODUCT SPEC	SOCKET ASSEMBLY, VERTICAL DDR3 DIMM, SOLDER TAIL, 240 POSITION		
MATERIAL		APPLICATION SPEC			
FINISH		WEIGHT	SIZE CAGE CODE DRAWING NO		
-		-	A1 00779 1932000		
CUSTOMER DRAWING		SCALE 4:1		SHEET 2 OF 4	REV H7



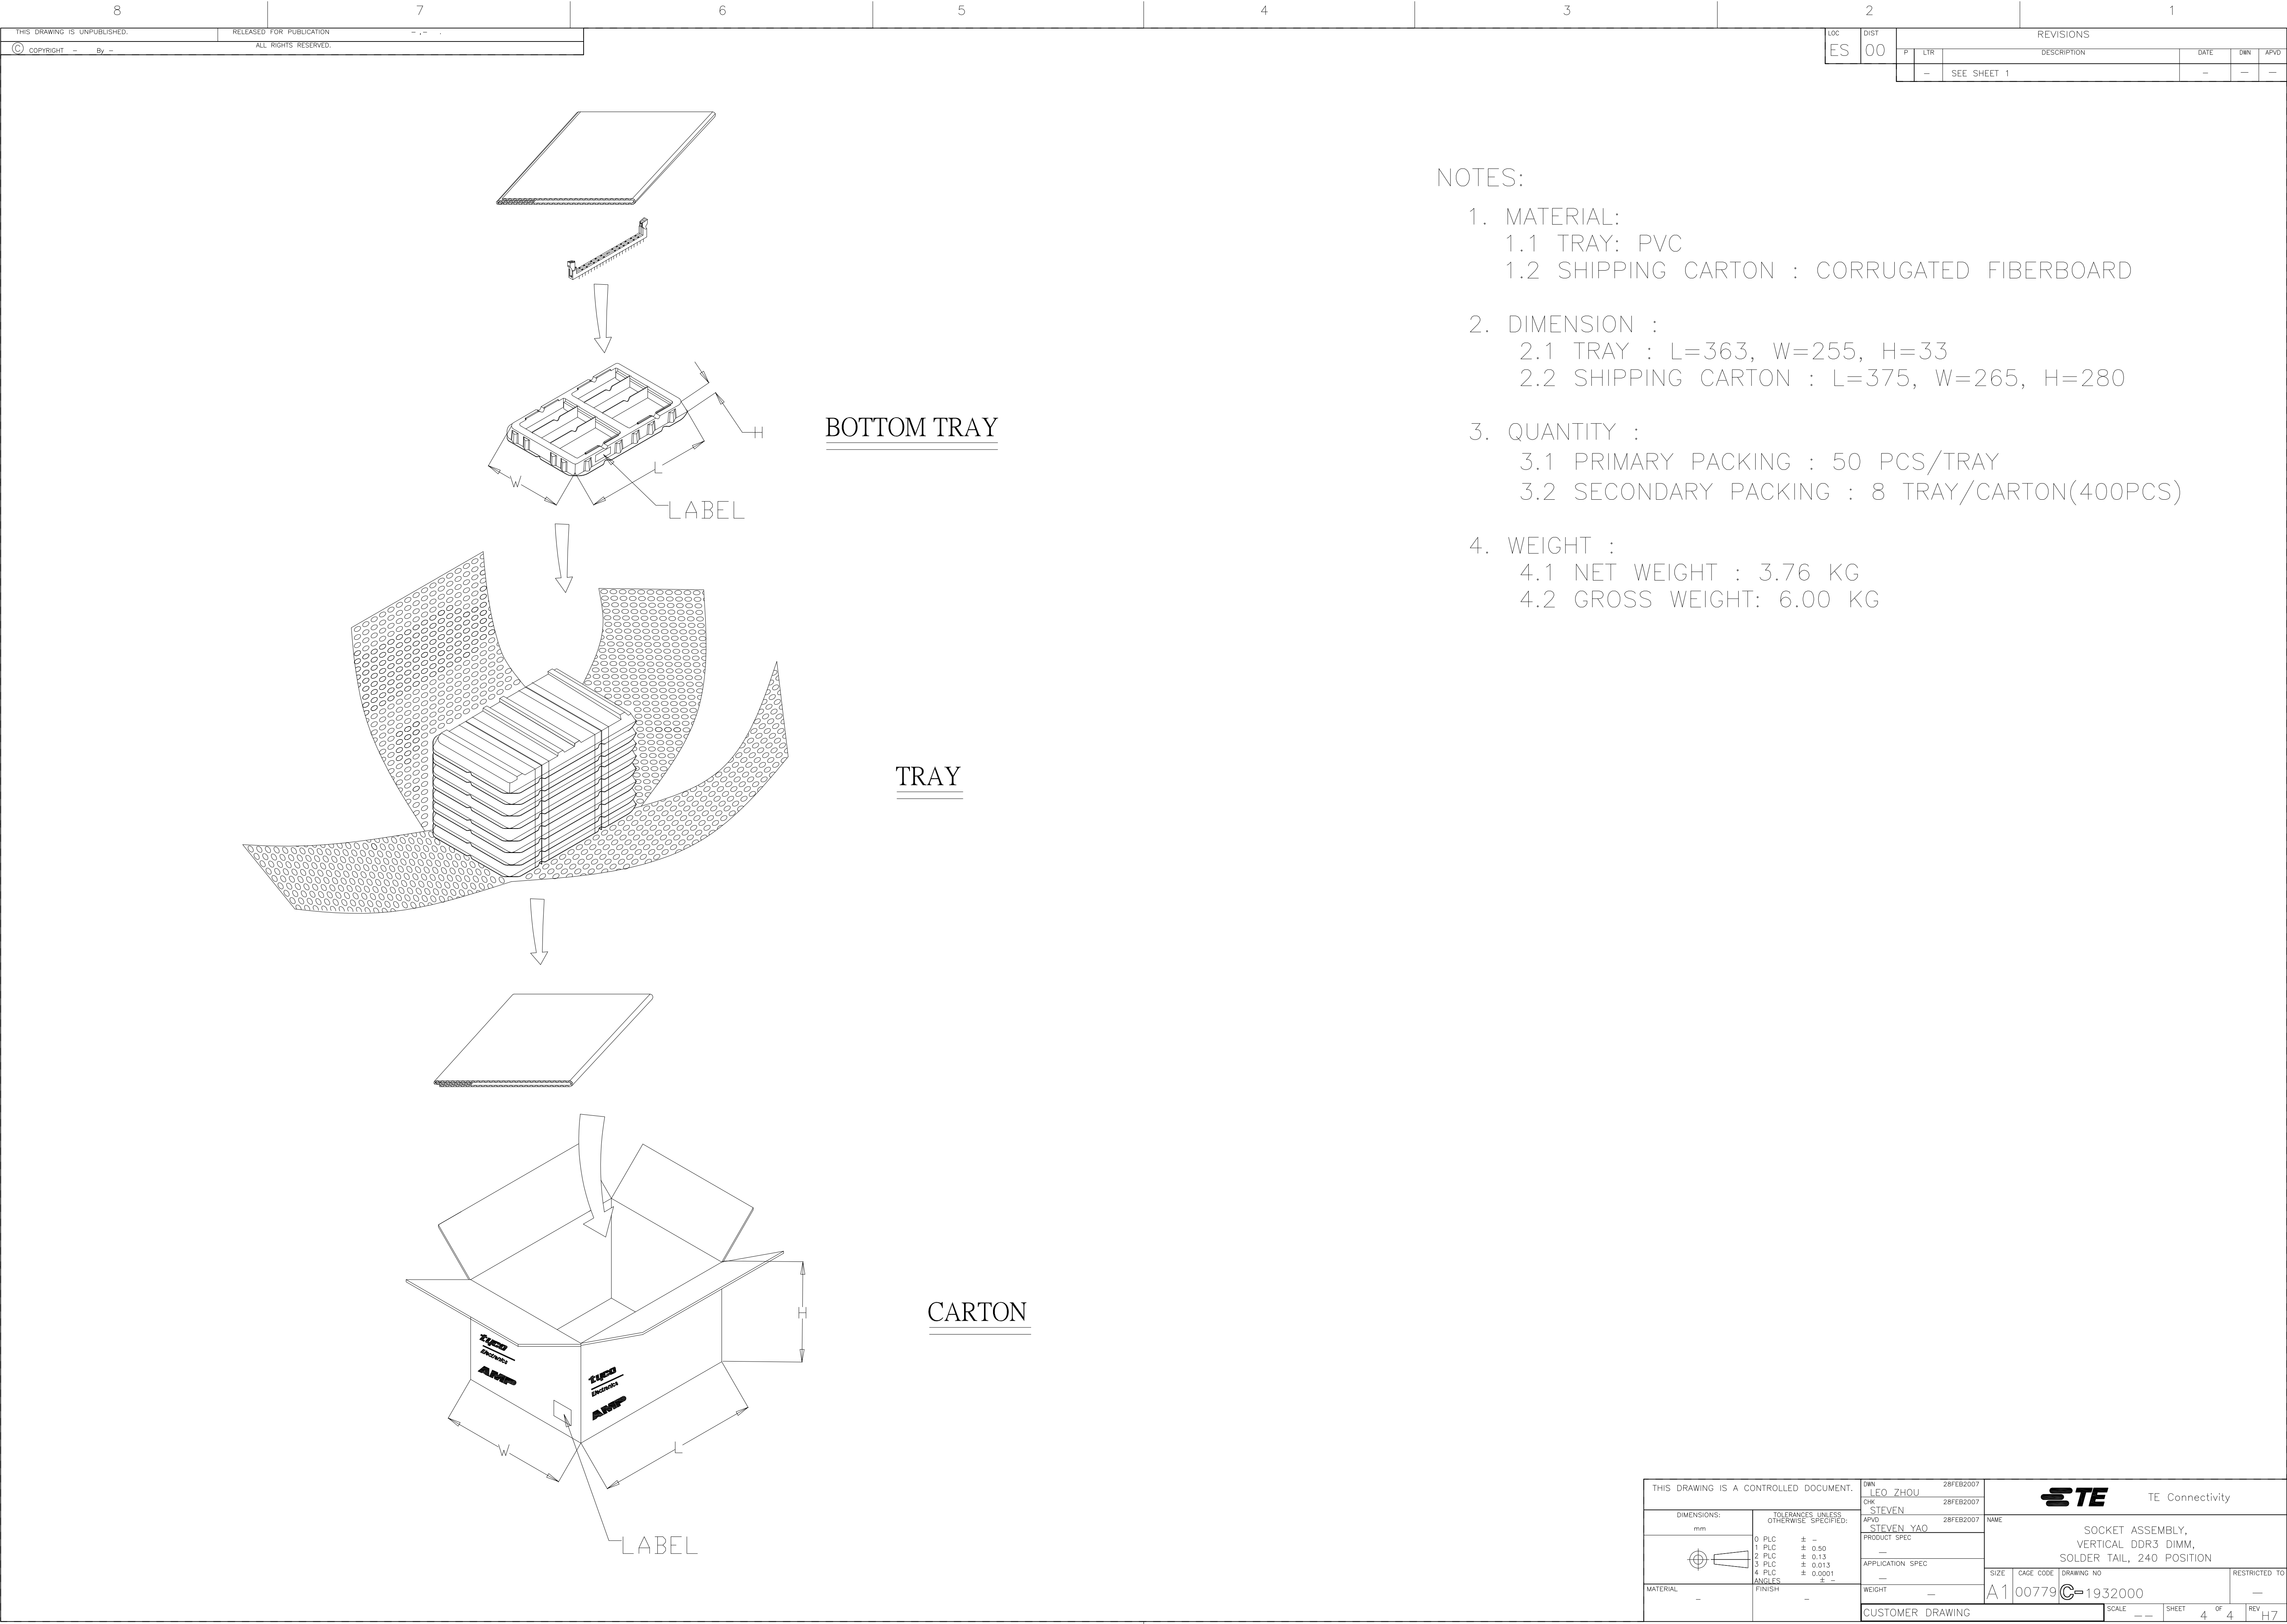

NOTES:

- 1. MATERIAL:
 - 1.1 TRAY: PVC
 - 1.2 SHIPPING CARTON : CORRUGATED FIBERBOARD
- 2. DIMENSION :
 - 2.1 TRAY : L=363, W=255, H=33
 - 2.2 SHIPPING CARTON : L=375, W=265, H=280
- 3. QUANTITY :
 - 3.1 PRIMARY PACKING : 50 PCS/TRAY
 - 3.2 SECONDARY PACKING : 8 TRAY/CARTON(400PCS)
- 4. WEIGHT :
 - 4.1 NET WEIGHT : 3.76 KG
 - 4.2 GROSS WEIGHT: 6.00 KG

8	7	6	5	4	3	2	1		
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		REVISIONS					
© COPYRIGHT By		ALL RIGHTS RESERVED.		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

BOTTOM TRAY

TRAY

CARTON

NOTES:

- MATERIAL:
 - TRAY: PVC
 - SHIPPING CARTON : CORRUGATED FIBERBOARD
- DIMENSION :
 - TRAY : L=363, W=255, H=33
 - SHIPPING CARTON : L=375, W=265, H=280
- QUANTITY :
 - PRIMARY PACKING : 50 PCS/TRAY
 - SECONDARY PACKING : 8 TRAY/CARTON(400PCS)
- WEIGHT :
 - NET WEIGHT : 3.76 KG
 - GROSS WEIGHT: 6.00 KG

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN: 28FEB2007 CHK: LEO ZHOU STEVEN 28FEB2007 APVD: STEVEN YAO 28FEB2007		NAME			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE			
0 PLC ± -		1 PLC ± 0.50		APPLICATION SPEC		CAGE CODE			
2 PLC ± 0.13		3 PLC ± 0.013		WEIGHT		DRAWING NO			
4 PLC ± 0.0001		ANGLES ± -		CUSTOMER DRAWING		RESTRICTED TO			
MATERIAL -		FINISH -		SCALE		REV			
				SHEET 4 OF 4		H			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.