

## TRANSIL™ array for data protection

## Main applications

Where transient overvoltage protection in ESD sensitive equipment is required, such as :


- Computers
- Printers
- Communication systems
- Cellular phones handsets and accessories
- Wireline and wireless telephone sets
- Set top boxes




## Order codes

Part Numbers	Marking
ESDA6V1W5	E61
ESDA6V1-5W6	E62
ESDA25W	E25
ESDA25W5	E25


## ESDA25W Functional diagram

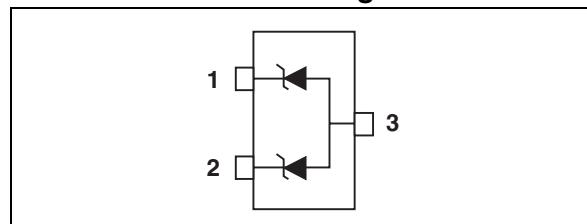

## ESDA6V1W5/ESDA25W5 Functional diagram

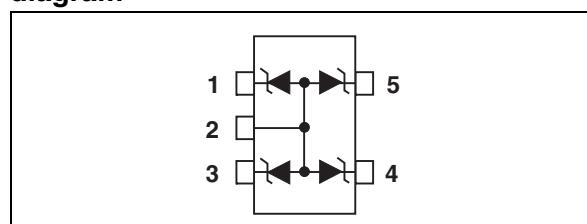

## ESDA6V1-5W6 Functional diagram

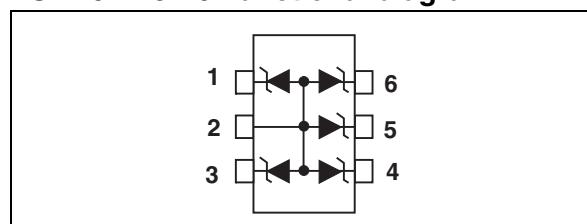

## Description

The ESDAxxxWx are monolithic suppressors designed to protect components connected to data and transmission lines against ESD.

These devices clamp the voltage just above the logic level supply for positive transients, and to a diode drop below ground for negative transients.

## Benefits

- High ESD protection level: up to 25 kV
- High integration

## Complies with the following standards

### IEC61000-4-2

Level 4              15 kV (air discharge)  
                        8 kV(contact discharge)

### MIL STD 883E - Method 3015-7 Class 3

25 kV HBM (Human Body Model)

# 1 Characteristics

**Table 1. Absolute Ratings ( $T_{amb} = 25^\circ C$ )**

Symbol	Parameter	Value	Unit
$P_{PP}$	Peak pulse power (8/20 $\mu s$ )	ESDA25W	400
		ESDA25W5 / ESDA6V1W5	150
		ESDA6V1-5W6	100
$T_j$	Junction temperature	125	$^\circ C$
$T_{stg}$	Storage temperature range	-55 to +150	$^\circ C$
$T_L$	Maximum lead temperature for soldering during 10s	260	$^\circ C$
$T_{op}$	Operating temperature range <sup>(1)</sup>	ESDA25W / ESDA25W5 / ESDA6V1W5	-40 to +125
		ESDA6V1-5W6	-40 to +125

1. The values of the operating parameters versus temperature are given through curves and  $\alpha T$  parameter.

## 1.1 Electrical Characteristics ( $T_{amb} = 25^\circ C$ )

Symbol	Parameter	
$V_{RM}$	Stand-off voltage	
$V_{BR}$	Breakdown voltage	
$V_{CL}$	Clamping voltage	
$I_{RM}$	Leakage current	
$I_{PP}$	Peak pulse current	
$I_R$	Reverse leakage current	
$I_F$	Forward current	
$\alpha T$	Voltage temperature coefficient	
$V_F$	Forward voltage drop	
$C$	Capacitance	
$R_d$	Dynamic resistance	

The graph illustrates the forward characteristic of a diode. The vertical axis is labeled  $I$  (Forward Current) and the horizontal axis is labeled  $V$  (Forward Voltage). The curve starts at a low voltage with a small slope, labeled "Slope:  $1/R_d$ ". As the voltage increases, the slope becomes steeper, leading to a sharp increase in current. Key points on the curve are marked with dashed lines:  $V_{CL}$  (Clamping voltage),  $V_{BR}$  (Breakdown voltage),  $V_{RM}$  (Stand-off voltage),  $I_{RM}$  (Leakage current),  $I_F$  (Forward current),  $V_F$  (Forward voltage drop), and  $I_{PP}$  (Peak pulse current).


Part Numbers	V <sub>BR</sub>		I <sub>RM</sub> @ V <sub>RM</sub>		V <sub>F</sub> @ I <sub>F</sub>		R <sub>d</sub>	αT	C	
	min.	max.	@ I <sub>R</sub>		max.		typ. <sup>(1)</sup>	max. <sup>(2)</sup>	typ.	
	V	V	mA	μA	V	mA	Ω	10 <sup>-4</sup> /°C	pF	
ESDA25W	25	30	1	1	24	1.2	10	1.1	10	65
ESDA25W5	25	30	1	1	24	1.2	10	1.9	10	30
ESDA6V1-5W6	6.1	7.2	1	1	3	1.25	200	0.61	6	50
ESDA6V1W5	6.1	7.2	1	1	3	1.25	200	0.35	6	90

1. Square pulse I<sub>pp</sub> = 15 A, t<sub>p</sub> = 2.5 μs


2. V<sub>BR</sub> = aT\* (T<sub>amb</sub> - 25 °C) \* V<sub>BR</sub> (25 °C)

**Figure 1. Peak power dissipation versus initial junction temperature**


**Figure 2. Peak pulse power versus exponential pulse duration (T<sub>j</sub> initial = 25°C) (ESDA25W)**

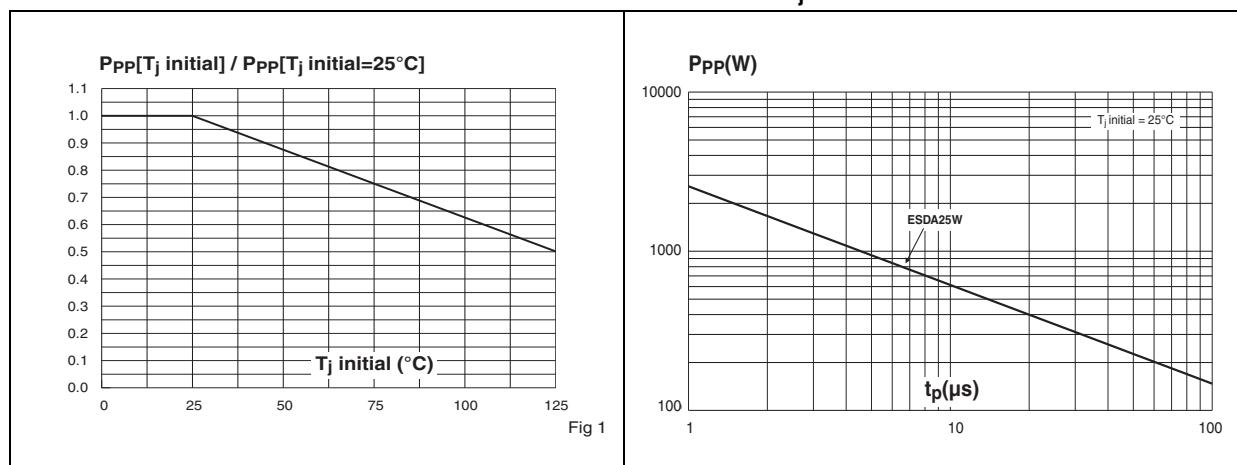


**Figure 3. Peak pulse power versus exponential pulse duration ( $T_j$  initial = 25°C) (ESDA25W5 / ESDA6V1W5 / ESDA6V1-5W6)**

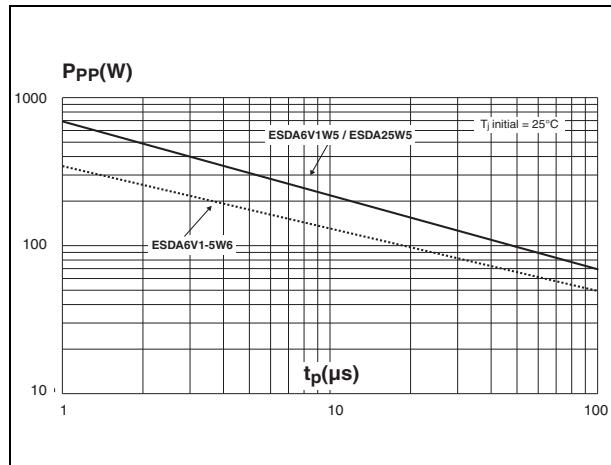


**Figure 4. Clamping voltage versus peak pulse current ( $T_j$  initial = 25°C, rectangular waveform,  $t_p$  = 2.5 µs) (ESDA25W / ESDA25W5)**

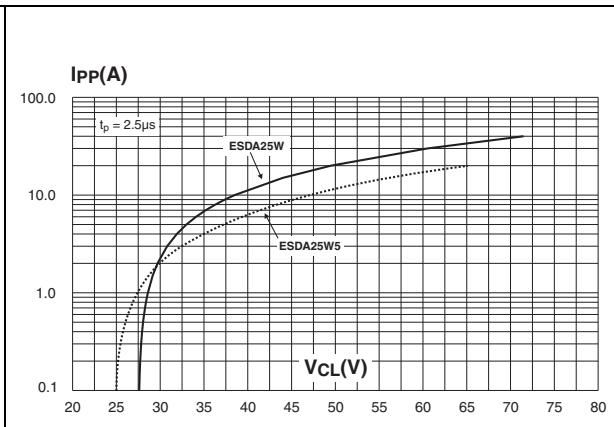


**Figure 5. Clamping voltage versus peak pulse current ( $T_j$  initial = 25°C, rectangular waveform,  $t_p$  = 2.5 µs) (ESDA6V1W5 / ESDA6V1-5W6)**

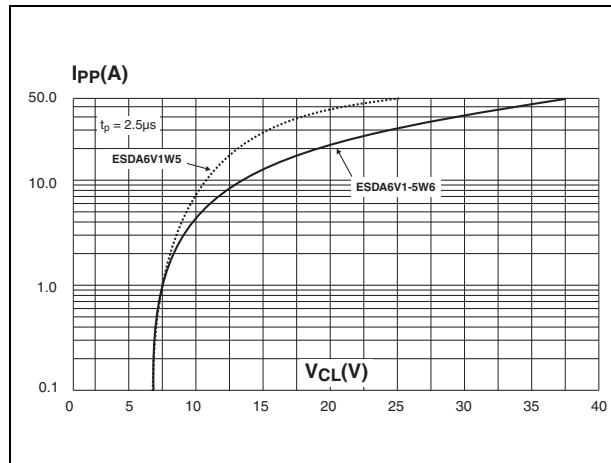


**Figure 6. Capacitance versus reverse applied voltage (typical values) (ESDA25W / ESDA25W5)**

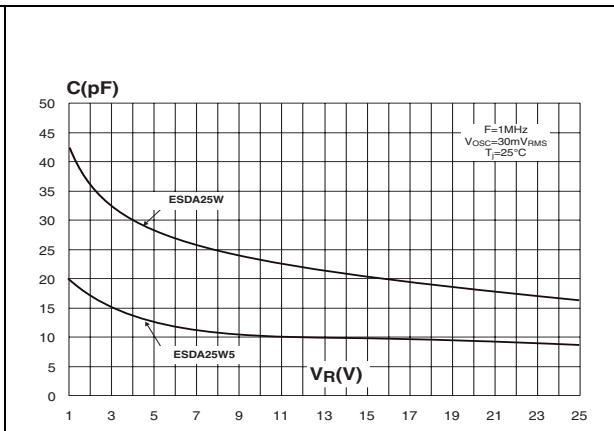


**Figure 7. Capacitance versus reverse applied voltage (typical values) (ESDA6V1W5 / ESDA6V1-5W6)**

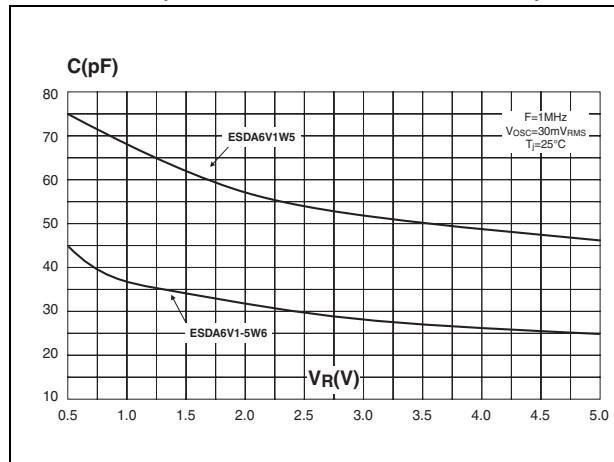


**Figure 8. Relative variation of leakage current versus junction temperature (typical values)**

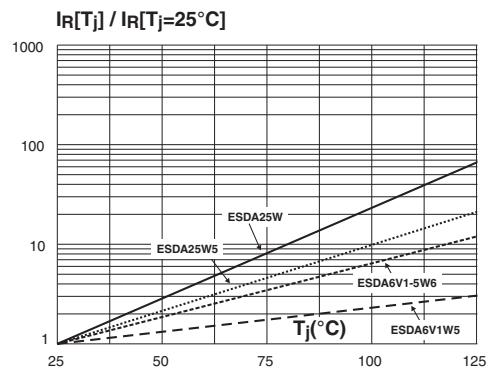


**Figure 9. Peak forward voltage drop versus peak forward current (typical values) (ESDA25W / ESDA25W5)**

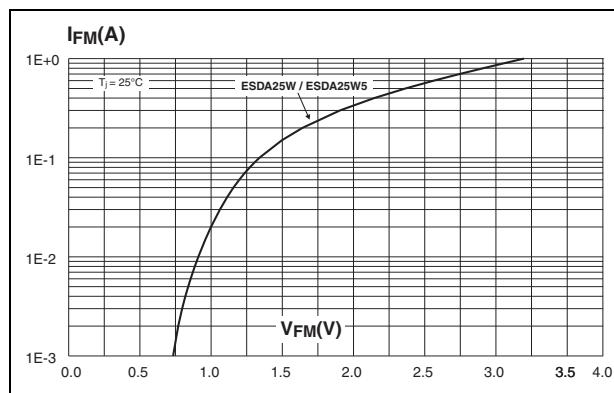


**Figure 10. Peak forward voltage drop versus peak forward current (typical values) (ESDA6V1W5 / ESDA6V1-5W6)**

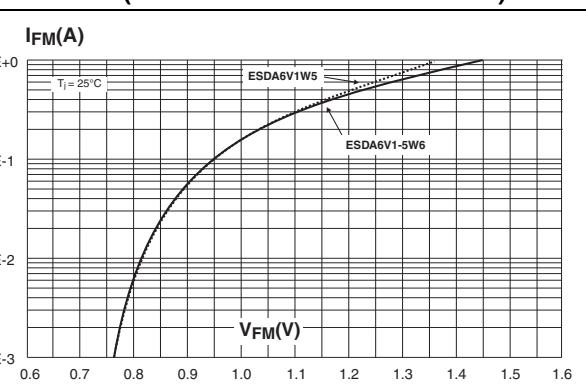

**Figure 11. ESD response to IEC61000-4-2 (air discharge 15 kV, positive surge)**

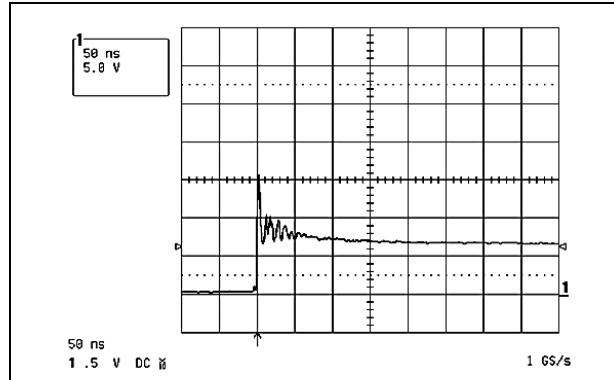


## 2 Ordering information scheme

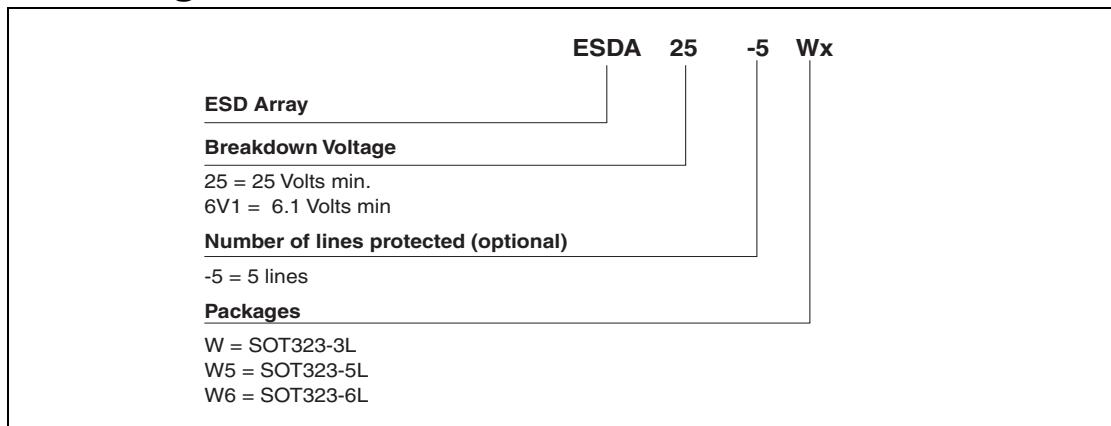


### 3 Package mechanical data

#### 3.1 SOT323-3L package

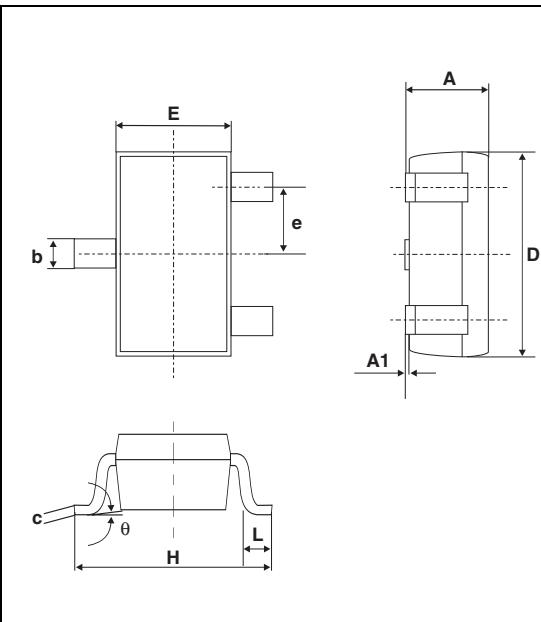


REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.8		1.1	0.031		0.043
A1	0.0		0.1	0.0		0.004
b	0.25		0.4	0.010		0.016
c	0.1		0.26	0.004		0.010
D	1.8	2.0	2.2	0.071	0.079	0.086
E	1.15	1.25	1.35	0.045	0.049	0.053
e		0.65			0.026	
H	1.8	2.1	2.4	0.071	0.083	0.094
L	0.1	0.2	0.3	0.004	0.008	0.012
q	0		30°	0		30°

Figure 12. Footprint dimensions

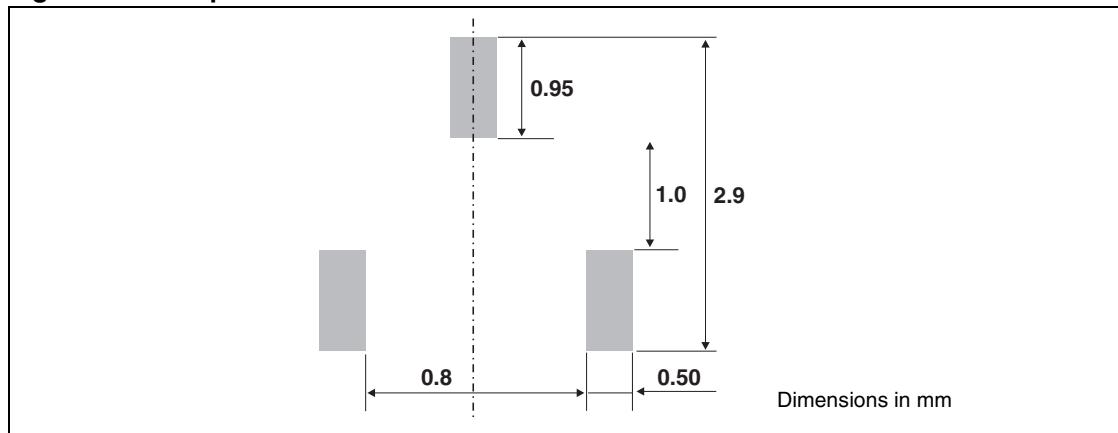


### 3.2 SOT323-5L package

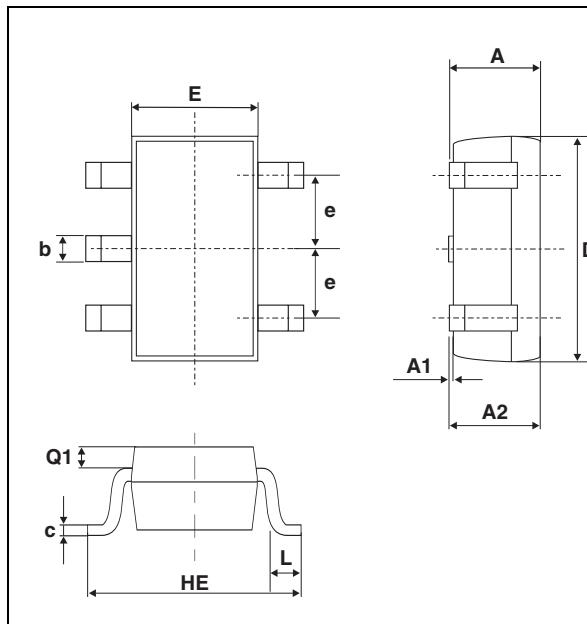


REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.8	1.1	0.031	0.043
A1	0	0.1	0	0.004
A2	0.8	1	0.031	0.039
b	0.15	0.3	0.006	0.012
c	0.1	0.18	0.004	0.007
D	1.8	2.2	0.071	0.086
E	1.15	1.35	0.045	0.053
e	0.65 Typ.		0.025 Typ.	
H	1.8	2.4	0.071	0.094
Q1	0.1	0.4	0.004	0.016

Figure 13. Footprint dimensions

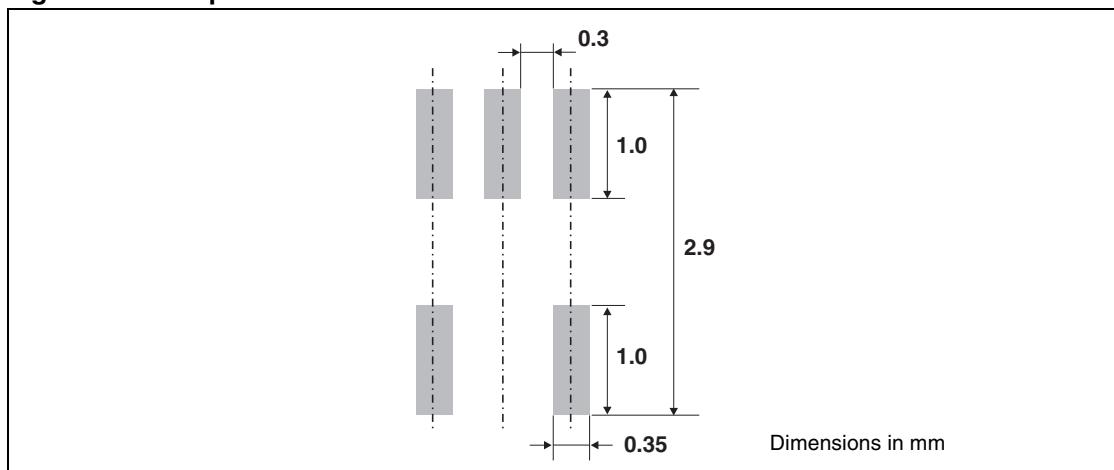


### 3.3 SOT323-6L package

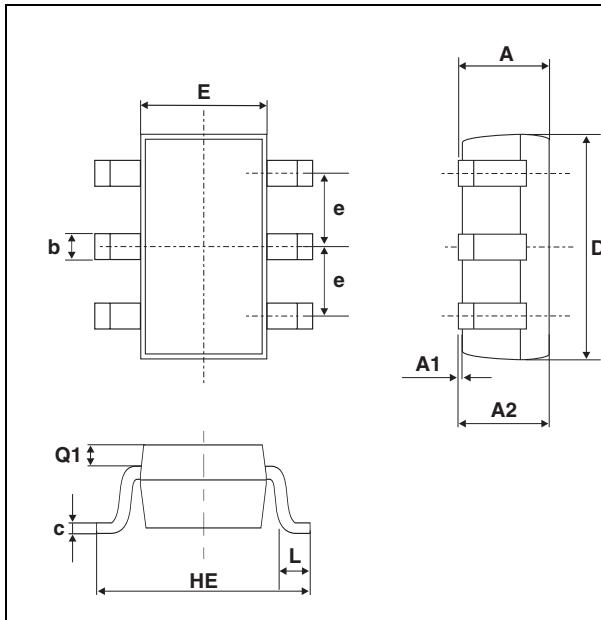

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.8	1.1	0.031	0.043
A1	0	0.1	0	0.004
A2	0.8	1	0.031	0.039
b	0.15	0.3	0.006	0.012
c	0.1	0.18	0.004	0.007
D	1.8	2.2	0.071	0.086
E	1.15	1.35	0.045	0.053
e	0.65 Typ.		0.025 Typ.	
H	1.8	2.4	0.071	0.094
Q	0.1	0.4	0.004	0.016

Figure 14. Footprint dimensions

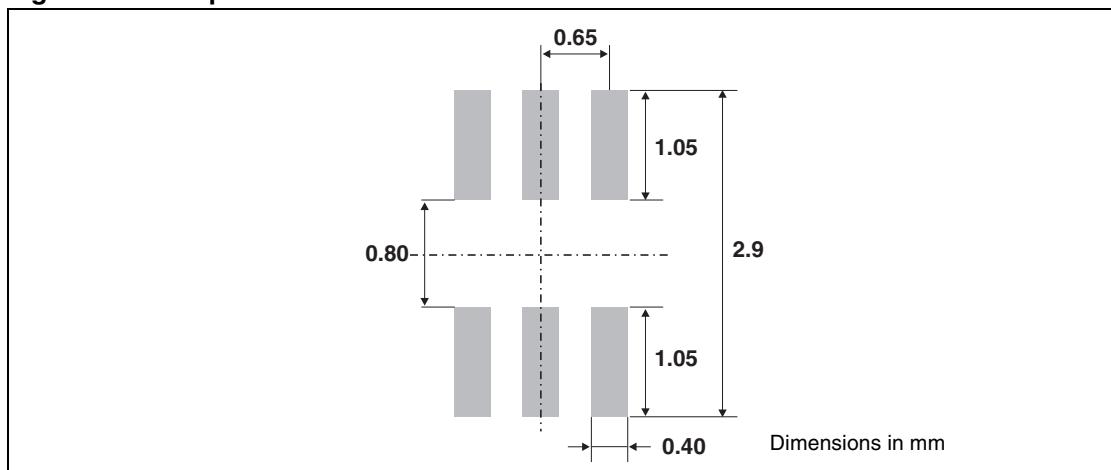

## 4 Ordering information

Part Number	Marking	Package	Weight	Base qty	Delivery mode
ESDA6V1W5	E61	SOT323-5L	6 mg	3000	Tape & reel
ESDA6V1-5W6	E62	SOT323-6L			
ESDA25W	E25	SOT323-3L			
ESDA25W5	E25	SOT323-5L			

## 5 Revision history

Date	Revision	Changes
20-Jul-2005	1	Initial release
29-Aug-2005	2	Added notes to table on page2, removed annotations in Figure 1.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.  
All other names are the property of their respective owners

© 2005 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -  
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.