


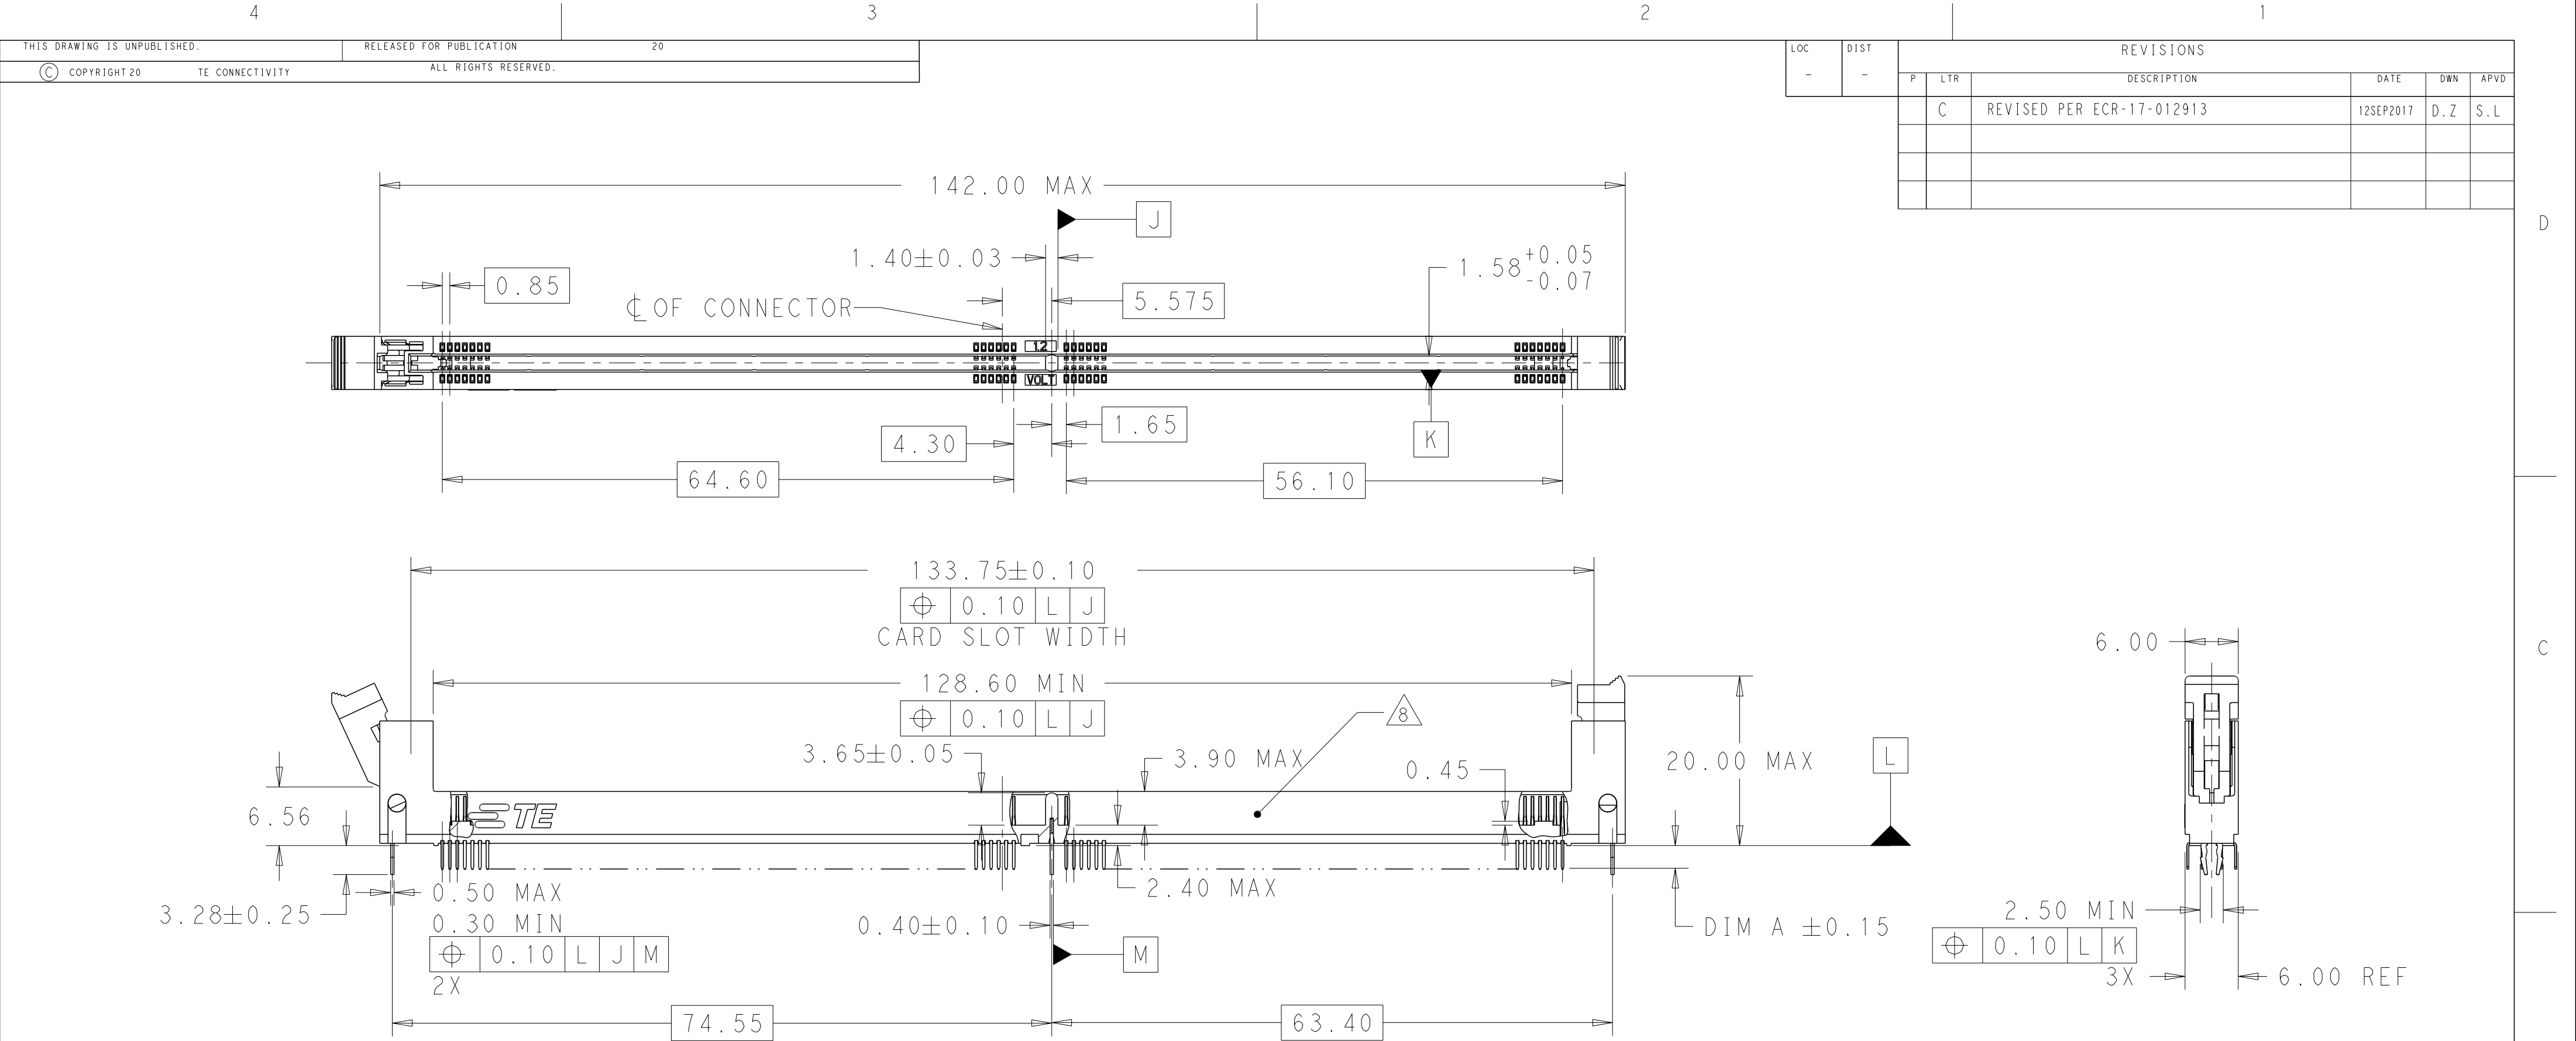

1 MATERIALS:

HOUSING: HIGH TEMPERATURE NYLON, UL94 V-0
EXTRACTOR: HIGH TEMPERATURE THERMOPLASTIC, UL94 V-0
CONTACTS: COPPER ALLOY
RETENTION BARB: STAINLESS STEEL

2 INTERFACE FINISH:

(1) 0.00076 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.
(2) 0.00038 MIN THK GOLD OVER 0.00127 MIN THK NICKEL.
(3) 0.00050 MIN THK GOLD OVER 0.00228 MIN THK NICKEL.

3 SOLDERTAIL FINISH:

0.00300 MIN THK MATTE TIN OVER 0.00127 MIN THK NICKEL.

4 KEEP OUT ZONE.

5 KEEP OUT AREA RESERVED FOR SOCKET EXTRACTORS, BOTH ENDS.

6 FINISHED HOLE SIZE. 0.15 MAXIMUM ANNULAR RING.

7 DATUM [Z] IS CONNECTOR SIDE SURFACE OF PCB.

8 5 DIGIT DATE CODE (YYWWD) LOCATED AS SHOWN.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
-	-	C		REVISED PER ECR-17-012913	12SEP2017	D.Z
						S.L

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RICHARD MA 18MAR2013	 TE Connectivity			
DIMENSIONS: mm		CHK SIMON LI 18MAR2013				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD COREI WANG 18MAR2013	NAME SOCKET ASSEMBLY DDR4 DIMM, T/H TYPE 288 POSITION			
0 PLC ±1 1 PLC ±0.25 2 PLC ±0.15 3 PLC ±0.10 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-115067				
MATERIAL		APPLICATION SPEC 501-115076	SIZE A200779	CAGE CODE C=2199154	DRAWING NO	RESTRICTED TO
		WEIGHT -				
		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 7	REV C	



VIEWED FROM CONNECTOR SIDE



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 18MAR2013 RICHARD MA CHK 18MAR2013 SIMON LI APVD 18MAR2013 COREL WANG		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±1 1 PLC ±0.25 2 PLC ±0.15 3 PLC ±0.10 4 PLC ±. ANGLES ±. FINISH		SOCKET ASSEMBLY DDR4 DIMM, T/H TYPE 288 POSITION	
MATERIAL		APPLICATION SPEC 108-115067 501-115076		SIZE	RESTRICTED TO
-		WEIGHT -		CAGE CODE A200779	DRAWING NO C-2199154
CUSTOMER DRAWING				SCALE 1:1	SHEET 2 OF 7
				REV C	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

-

-

SEE SHEET 1

-

-

-

152.00 MAX

142.00 MAX

20.00 MAX

20.50 MAX

14.50 MIN

5.00 MIN

6.00

SHORT LATCH TYPE

SOFT TRAY	BOARD LOCK	BLUE(2935U)	BLUE(2935U)	0.00038 MIN	2.10	9-2199154-6
SOFT TRAY	BOARD LOCK	NATURAL	BLUE(2935U)	0.00038 MIN	2.10	9-2199154-3
SOFT TRAY	BOARD LOCK	NATURAL	GREEN(375C)	0.00038 MIN	2.67	9-2199154-2
SOFT TRAY	BOARD LOCK	GREEN(375C)	BLACK	0.00076 MIN	2.10	8-2199154-9
SOFT TRAY	BOARD LOCK	NATURAL	BLUE(2935U)	0.00038 MIN	2.67	8-2199154-8
SOFT TRAY	BOARD LOCK	NATURAL	YELLOW(107C)	0.00076 MIN	3.18	8-2199154-7
SOFT TRAY	BOARD LOCK	NATURAL	YELLOW(107C)	0.00038 MIN	3.18	8-2199154-6
SOFT TRAY	BOARD LOCK	NATURAL	BLUE(2935U)	0.00076 MIN	3.18	8-2199154-4
SOFT TRAY	BOARD LOCK	GREEN(375C)	BLACK	0.00050 MIN	3.18	8-2199154-3
SOFT TRAY	BOARD LOCK	NATURAL	BLUE(2935U)	0.00038 MIN	3.18	8-2199154-2
SOFT TRAY	BOARD LOCK	GREEN(375C)	BLACK	0.00076 MIN	2.67	8-2199154-1
SOFT TRAY	BOARD LOCK	BLUE(2935U)	BLUE(2935U)	0.00038 MIN	2.67	7-2199154-9
SOFT TRAY	BOARD LOCK	NATURAL	YELLOW(107C)	0.00076 MIN	2.67	6-2199154-9
SOFT TRAY	BOARD LOCK	BLUE(2935U)	BLUE(2935U)	0.00038 MIN	3.18	6-2199154-6
SOFT TRAY	BOARD LOCK	BLACK	BLACK	0.00076 MIN	3.18	6-2199154-4
SOFT TRAY	BOARD LOCK	NATURAL	BLACK	0.00076 MIN	3.18	6-2199154-0
SOFT TRAY	BOARD LOCK	BLACK	BLACK	0.00050 MIN	3.18	5-2199154-2
SOFT TRAY	BOARD LOCK	NATURAL	BLACK	0.00050 MIN	3.18	5-2199154-1
SOFT TRAY	BOARD LOCK	NATURAL	NATURAL	0.00076 MIN	3.18	2-2199154-6
SOFT TRAY	BOARD LOCK	NATURAL	NATURAL	0.00038 MIN	3.18	2-2199154-5
SOFT TRAY	BOARD LOCK	BLACK	BLACK	0.00038 MIN	3.18	2-2199154-3
SOFT TRAY	BOARD LOCK	NATURAL	BLACK	0.00038 MIN	3.18	2-2199154-1
SOFT TRAY	BOARD LOCK	NATURAL	NATURAL	0.00076 MIN	2.10	1-2199154-6
SOFT TRAY	BOARD LOCK	NATURAL	BLACK	0.00038 MIN	2.10	1-2199154-5
SOFT TRAY	BOARD LOCK	BLACK	BLACK	0.00076 MIN	2.10	1-2199154-4
SOFT TRAY	BOARD LOCK	NATURAL	NATURAL	0.00038 MIN	2.10	1-2199154-3
SOFT TRAY	BOARD LOCK	NATURAL	BLACK	0.00076 MIN	2.10	1-2199154-2
SOFT TRAY	BOARD LOCK	BLACK	BLACK	0.00038 MIN	2.10	1-2199154-1
SOFT TRAY	BOARD LOCK	NATURAL	NATURAL	0.00076 MIN	2.67	2199154-6
SOFT TRAY	BOARD LOCK	NATURAL	NATURAL	0.00038 MIN	2.67	2199154-5
SOFT TRAY	BOARD LOCK	BLACK	BLACK	0.00076 MIN	2.67	2199154-4
SOFT TRAY	BOARD LOCK	BLACK	BLACK	0.00038 MIN	2.67	2199154-3
SOFT TRAY	BOARD LOCK	NATURAL	BLACK	0.00076 MIN	2.67	2199154-2
SOFT TRAY	BOARD LOCK	NATURAL	BLACK	0.00038 MIN	2.67	2199154-1
PACKING STYLE	HOUSING STYLE	EXTRACTOR COLOR	HOUSING COLOR	CONTACT GOLD INTERFACE	DIM A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±1

1 PLC ±0.25

2 PLC ±0.15

3 PLC ±0.10

4 PLC ±

ANGLES ±

FINISH

MATERIAL -

DWN RICHARD MA 18MAR2013

CHK SIMON LI 18MAR2013

APVD COREL WANG 18MAR2013

PRODUCT SPEC 108-115067

APPLICATION SPEC 501-115076

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

SOCKET ASSEMBLY DDR4 DIMM,T/H TYPE 288 POSITION

SIZE A200779

CAGE CODE C=2199154

DRAWING NO

RESTRICTED TO -

SCALE 1:1

SHEET 3 OF 7

REV C

1471-9 (3/11)

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SOFT TRAY

BOARD LOCK

NATURAL

GREEN(375C)

0.00076 MIN

3.18

9-2199154-9

SOFT TRAY

BOARD LOCK

NATURAL

YELLOW(107C)

0.00076 MIN

3.18

9-2199154-8

SOFT TRAY

BOARD LOCK

NATURAL

BLUE(2935U)

0.00076 MIN

3.18

9-2199154-7

SOFT TRAY

BOARD LOCK

NATURAL

GREEN(375C)

0.00038 MIN

2.10

9-2199154-5

SOFT TRAY

BOARD LOCK

NATURAL

BLUE(2935U)

0.00038 MIN

2.10

9-2199154-4

SOFT TRAY

BOARD LOCK

NATURAL

BLUE(2935U)

0.00038 MIN

3.18

9-2199154-0

SOFT TRAY

BOARD LOCK

BLUE(2935U)

BLUE(2935U)

0.00038 MIN

2.10

8-2199154-0

SOFT TRAY

BOARD LOCK

BLUE(2935U)

BLUE(2935U)

0.00038 MIN

2.67

7-2199154-8

SOFT TRAY

BOARD LOCK

BLACK

BLACK

0.00076 MIN

3.18

7-2199154-6

SOFT TRAY

BOARD LOCK

BLUE(2935U)

BLUE(2935U)

0.00038 MIN

3.18

7-2199154-5

SOFT TRAY

BOARD LOCK

NATURAL

NATURAL

0.00038 MIN

3.18

7-2199154-4

SOFT TRAY

BOARD LOCK

BLACK

BLACK

0.00038 MIN

3.18

7-2199154-3

SOFT TRAY

BOARD LOCK

NATURAL

BLACK

0.00038 MIN

2.67

6-2199154-8

SOFT TRAY

BOARD LOCK

NATURAL

BLUE(2935U)

0.00038 MIN

2.67

6-2199154-7

SOFT TRAY

BOARD LOCK

NATURAL

YELLOW(107C)

0.00038 MIN

2.67

6-2199154-5

SOFT TRAY

BOARD LOCK

NATURAL

BLACK

0.00038 MIN

3.18

6-2199154-1

SOFT TRAY

BOARD LOCK

BLACK

BLACK

0.00038 MIN

2.40

5-2199154-9

SOFT TRAY

BOARD LOCK

NATURAL

NATURAL

0.00038 MIN

2.40

5-2199154-8

SOFT TRAY

BOARD LOCK

BLACK

BLACK

0.00076 MIN

2.40

5-2199154-7

SOFT TRAY

BOARD LOCK

NATURAL

NATURAL

0.00076 MIN

2.40

5-2199154-6

SOFT TRAY

BOARD LOCK

NATURAL

BLACK

0.00076 MIN

2.67

5-2199154-5

SOFT TRAY

BOARD LOCK

BLACK

BLACK

0.00076 MIN

2.67

5-2199154-4

SOFT TRAY

WIDER BOARD LOCK

NATURAL

BLACK

0.00038 MIN

2.10

5-2199154-3

SOFT TRAY

WIDER BOARD LOCK

NATURAL

BLUE(2935U)

0.00038 MIN

2.10

5-2199154-0

SOFT TRAY

WIDER BOARD LOCK

NATURAL

GREEN(375C)

0.00038 MIN

2.10

4-2199154-9

SOFT TRAY

BOARD LOCK

NATURAL

BLACK

0.00038 MIN

2.40

4-2199154-8

SOFT TRAY

BOARD LOCK

NATURAL

YELLOW(107C)

0.00038 MIN

2.40

4-2199154-7

HARD TRAY

BOARD LOCK

BLUE(2935U)

BLUE(2935U)

0.00038 MIN

3.18

4-2199154-2

HARD TRAY

BOARD LOCK

BLACK

BLACK

0.00038 MIN

3.18

4-2199154-1

SOFT TRAY

BOARD LOCK

BLUE(2935U)

BLUE(2935U)

0.00076 MIN

2.67

4-2199154-0

SOFT TRAY

BOARD LOCK

NATURAL

BLACK

0.00076 MIN

3.18

2-2199154-8

SOFT TRAY

BOARD LOCK

BLACK

BLACK

0.00038 MIN

2.10

1-2199154-9

SOFT TRAY

BOARD LOCK

NATURAL

NATURAL

0.00038 MIN

2.10

1-2199154-8

SOFT TRAY

BOARD LOCK

NATURAL

BLACK

0.00038 MIN

2.10

1-2199154-7

SOFT TRAY

BOARD LOCK

BLACK

BLACK

0.00038 MIN

2.67

2199154-9

SOFT TRAY

BOARD LOCK

NATURAL

NATURAL

0.00038 MIN

2.67

2199154-8

SOFT TRAY

BOARD LOCK

NATURAL

BLACK

0.00038 MIN

2.67

2199154-7

PACKING STYLE

HOUSING STYLE

EXTRACTOR COLOR

HOUSING COLOR

CONTACT GOLD INTERFACE

DIM A

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

RICHARD MA

18MAR2013

CHK

SIMON LI

18MAR2013

APVD

COREL WANG

18MAR2013

PRODUCT SPEC

108-115067

APPLICATION SPEC

501-115076

WEIGHT

-

CUSTOMER DRAWING

DIMENSIONS:

mm

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±1

1 PLC ±0.25

2 PLC ±0.15

3 PLC ±0.10

4 PLC ±-

ANGLES ±-

FINISH ±-

NAME

SOCKET ASSEMBLY

DDR4 DIMM,T/H TYPE

288 POSITION

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=2199154

RESTRICTED TO

-

SCALE

1:1

SHEET

4

OF

7

REV

C

162.00 MAX

146.80 MAX

142.00 MAX

21.15 MAX

21.30 MAX


14.50 MIN

5.00 MIN


6.00 REF

LONG LATCH TYPE

1471-9 (3/11)

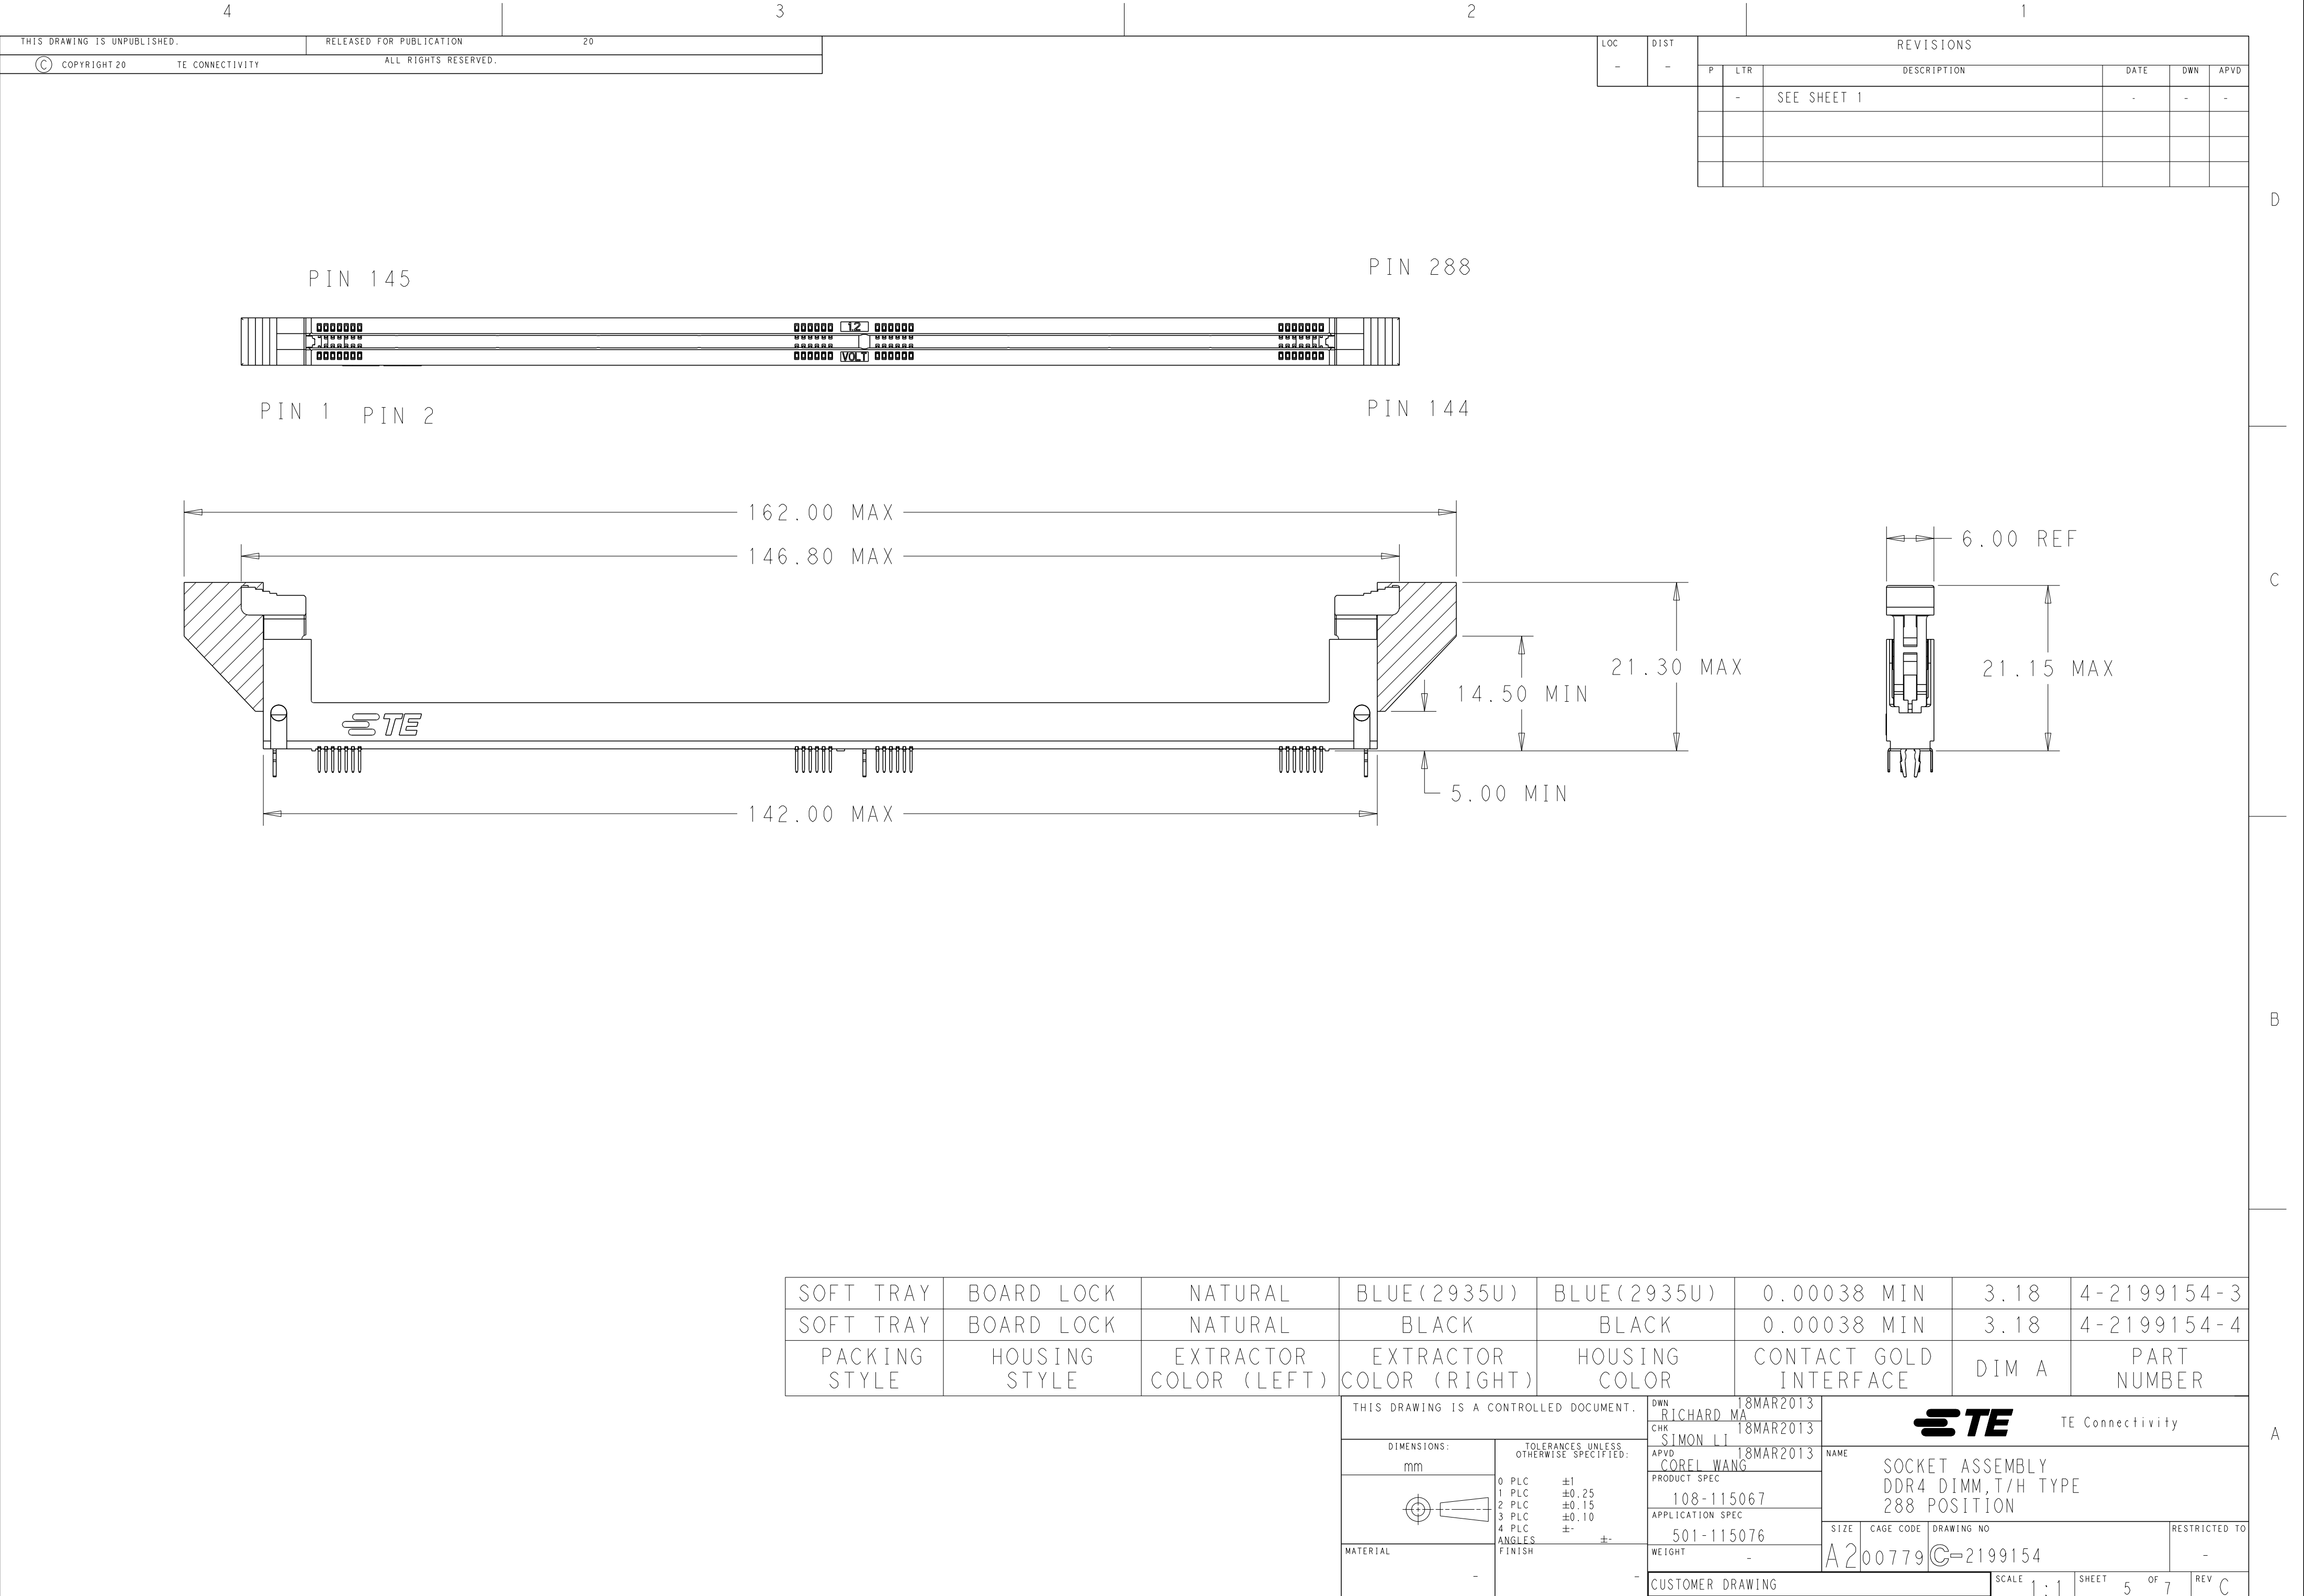

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-						






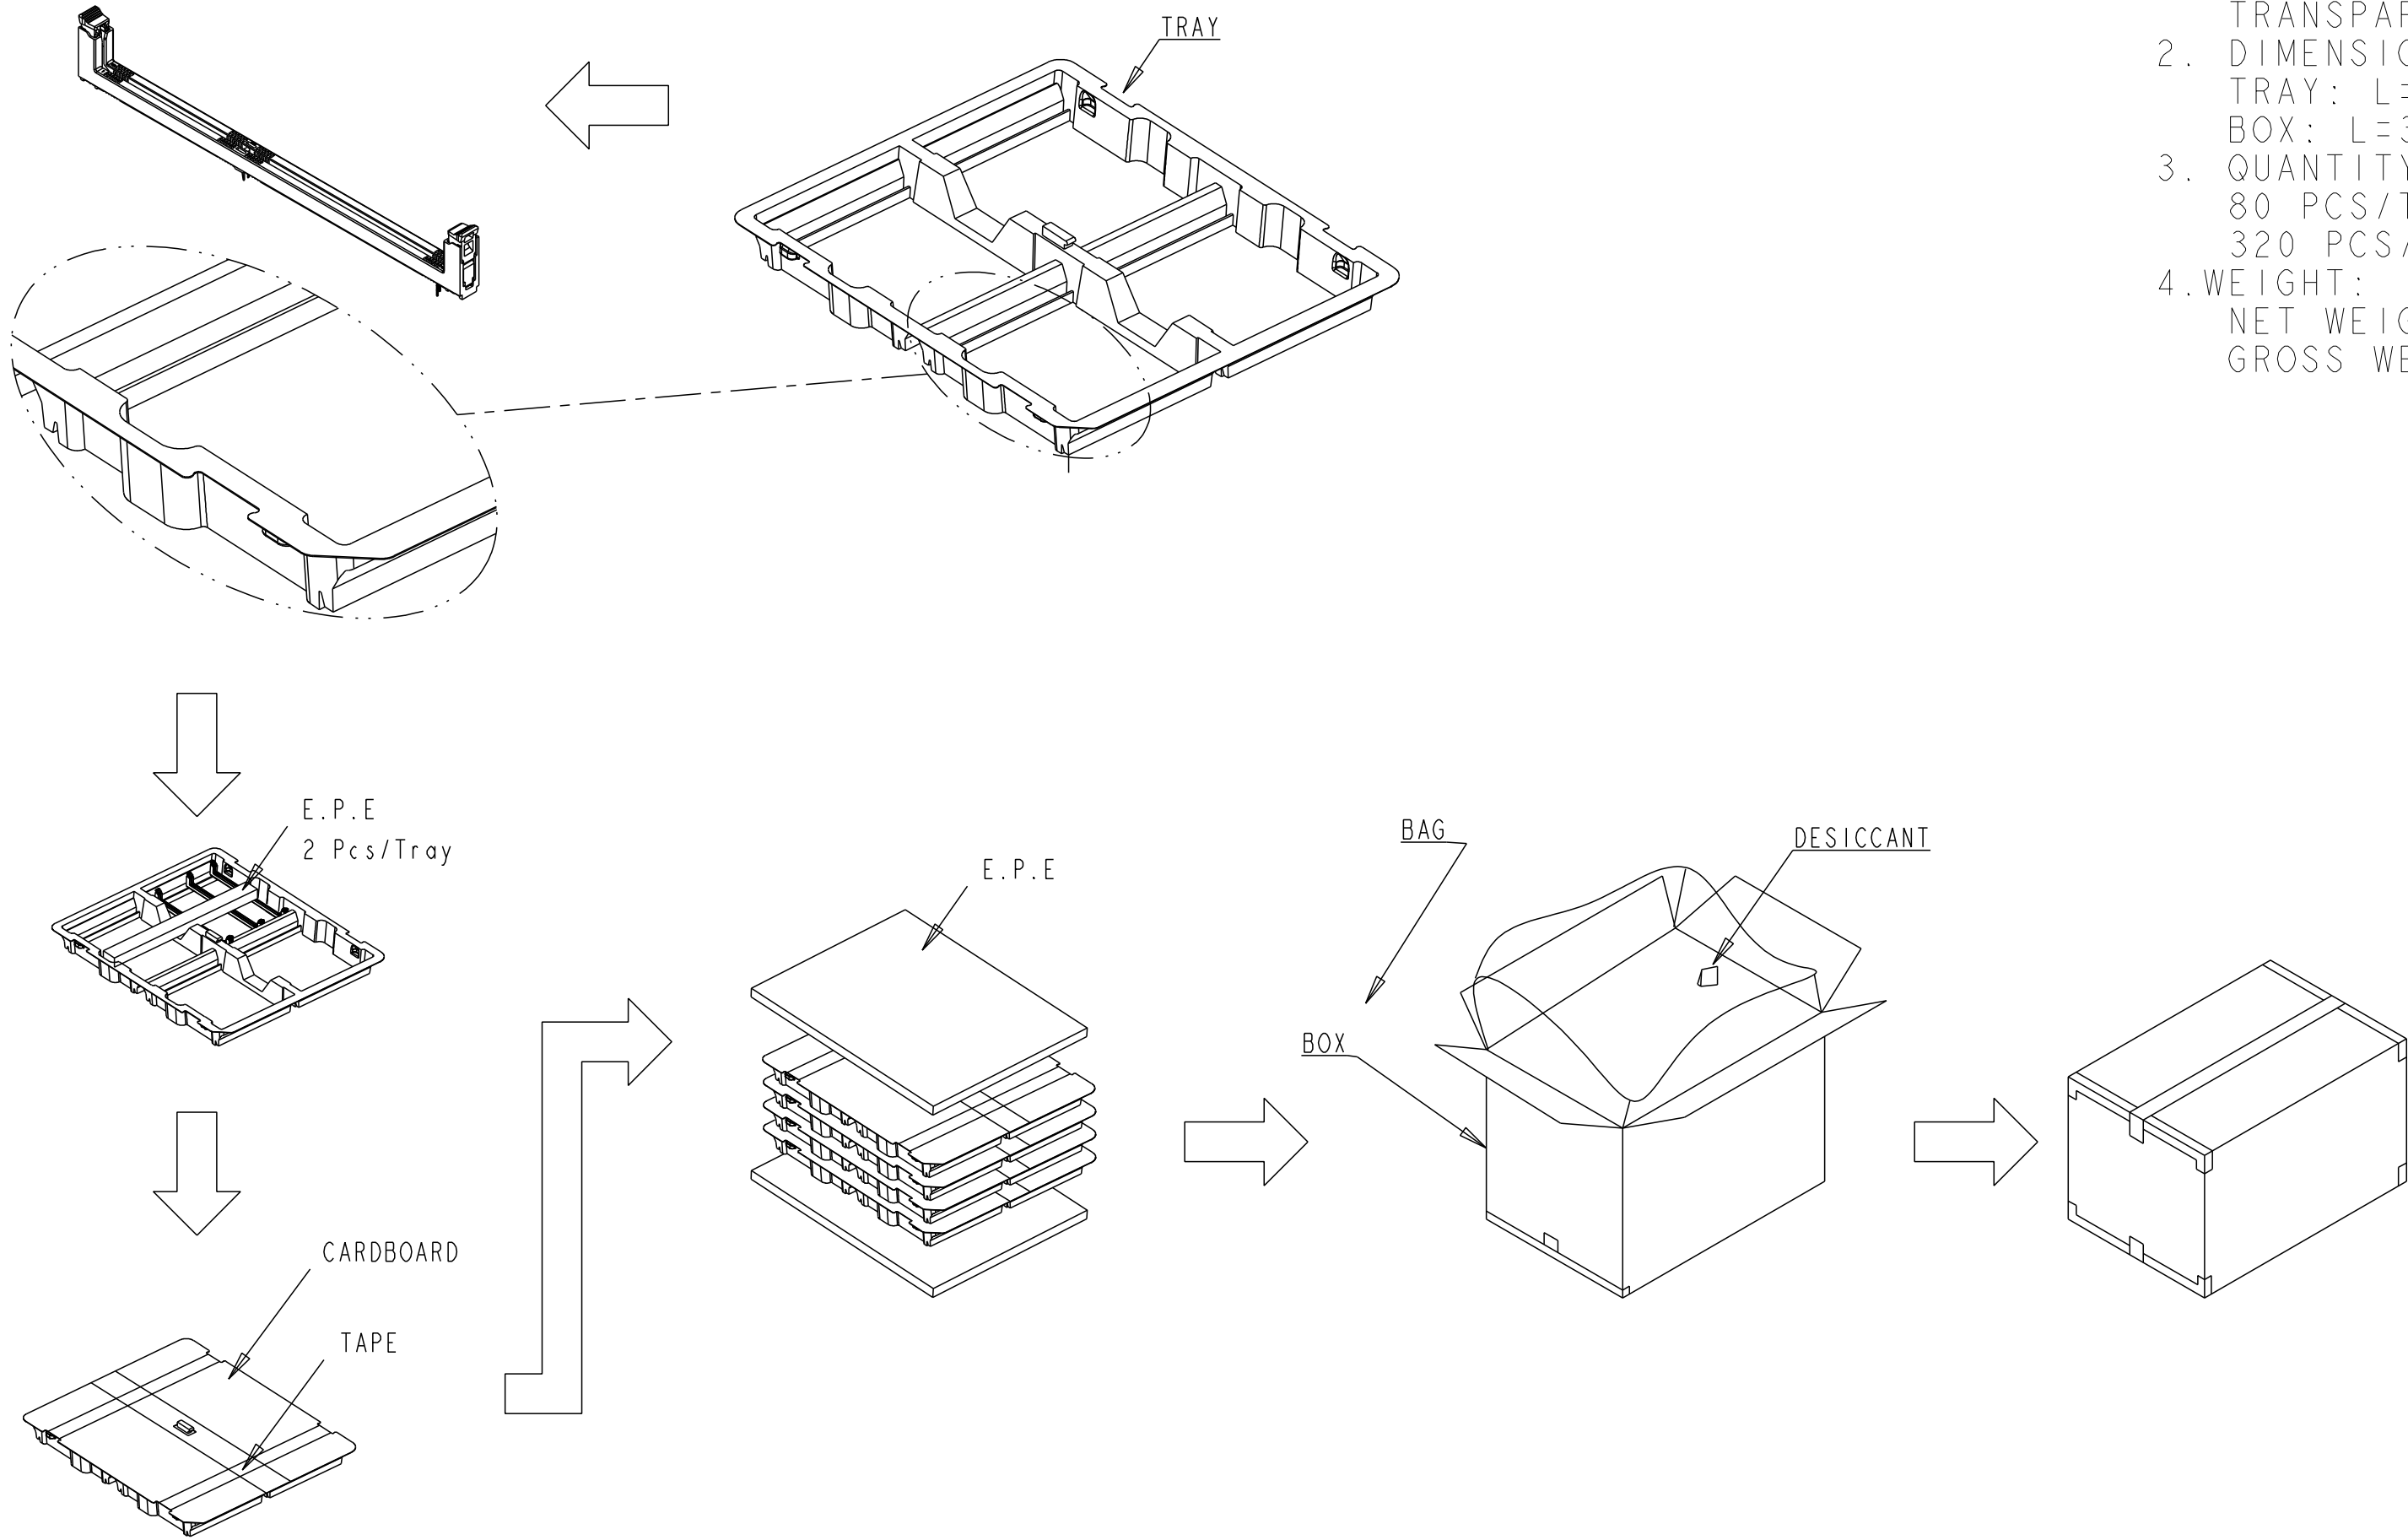


1. MATERIALS :
TRAY: PVC, COLOR: TRANSPARENT
BOX: CORRUGATED FIBERBOARD
TRANSPARENT BAG: PE
2. DIMENSIONS:
TRAY: L=343;W=292;H=32.5
BOX: L=365;W=310;H=200
3. QUANTITY:
80 PCS/TRAY
320 PCS/BOX
4. WEIGHT:
NET WEIGHT: 1.9KG
GROSS WEIGHT: 3.4KG

SOFT TRAY PACKING

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN 18MAR2013 RICHARD MA CHK 18MAR2013 SIMON LI APVD 18MAR2013 COREL WANG PRODUCT SPEC 108-115067 APPLICATION SPEC 501-115076 WEIGHT - CUSTOMER DRAWING		TE TE Connectivity NAME SOCKET ASSEMBLY DDR4 DIMM,T/H TYPE 288 POSITION SIZE CAGE CODE DRAWING NO RESTRICTED TO A200779 C=2199154 -					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:									
		0 PLC ±1 1 PLC ±0.25 2 PLC ±0.15 3 PLC ±0.10 4 PLC ±- ANGLES ±- FINISH									
MATERIAL -											

		1					
LOC	DIST	REVISIONS					
-	-	P	LTR	DESCRIPTION	DATE	DWN	APVD

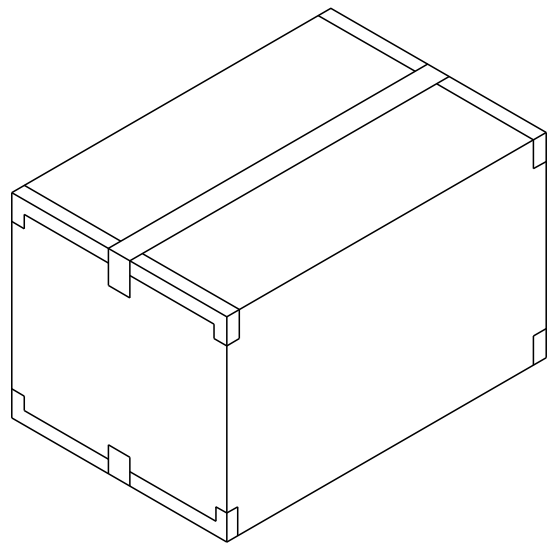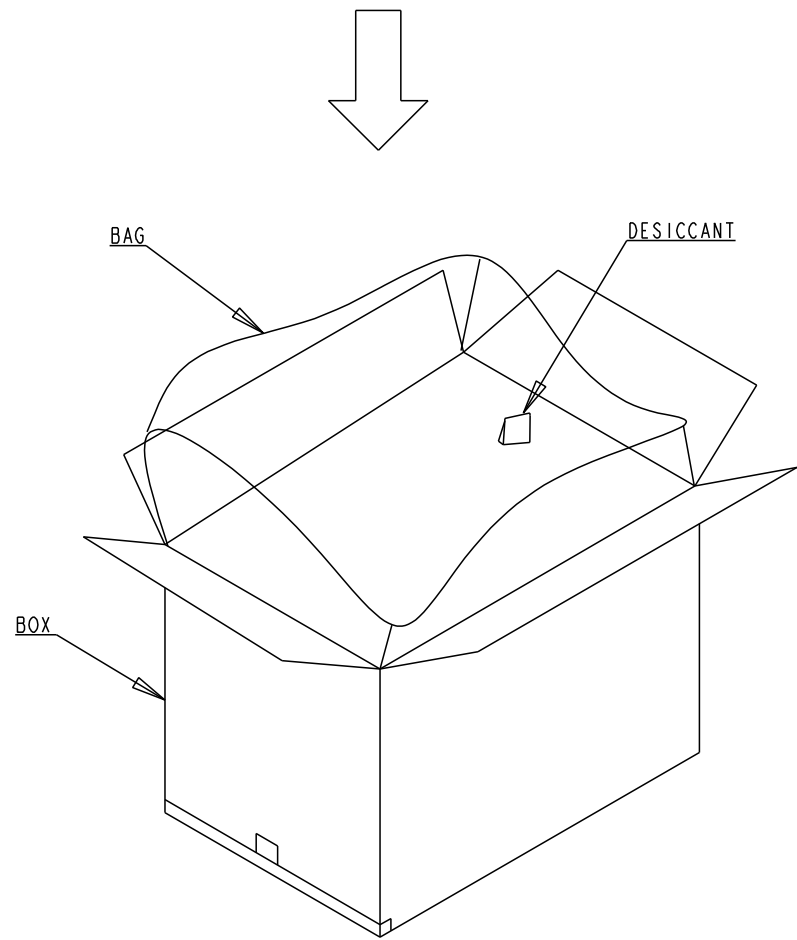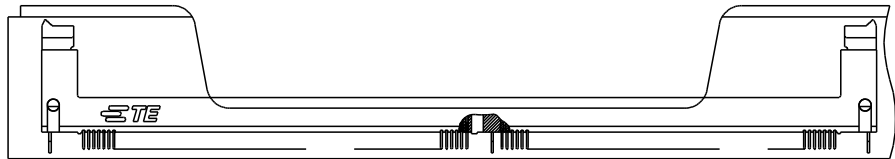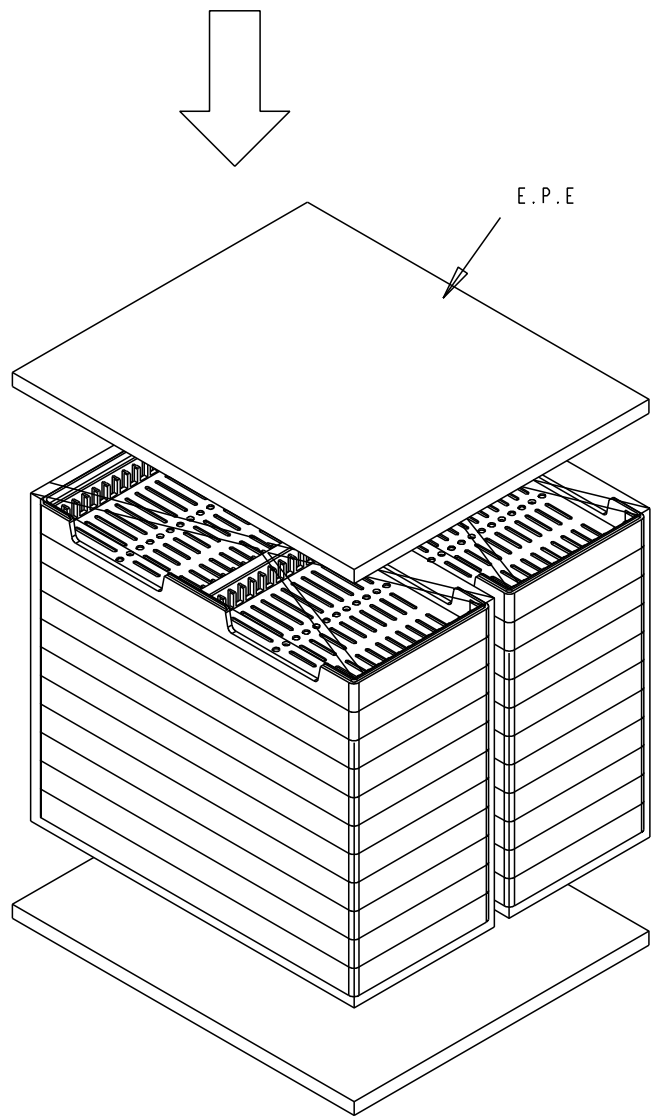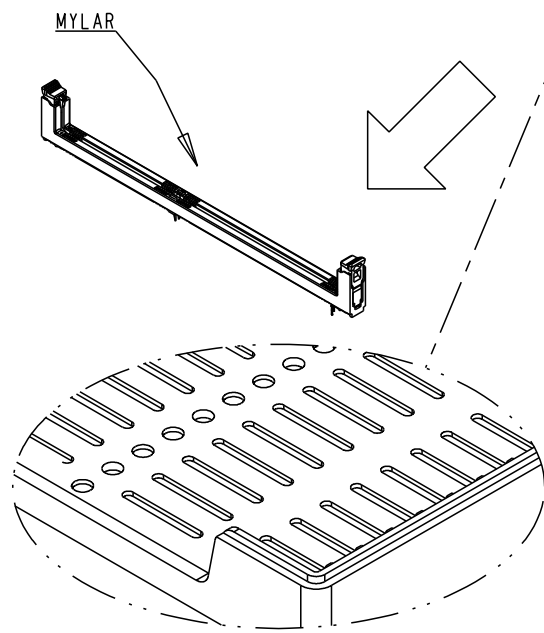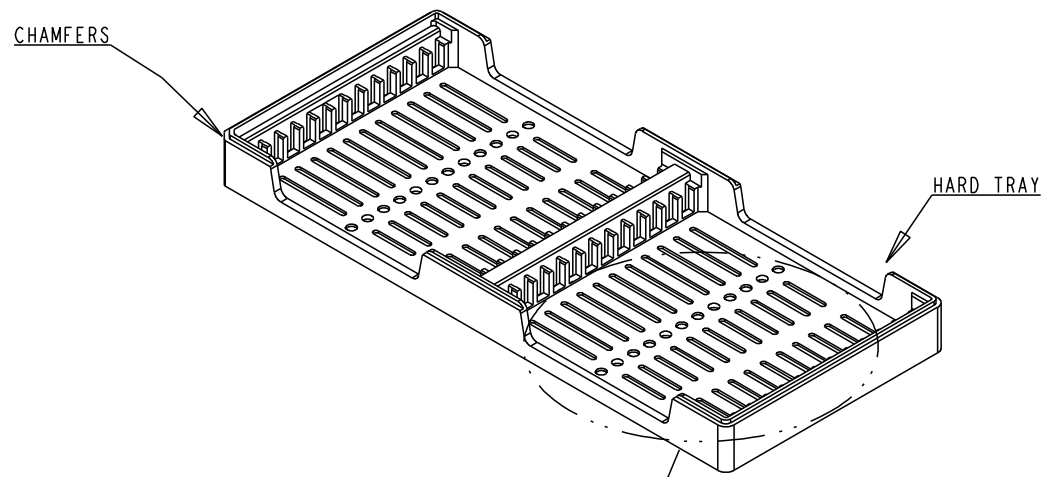

1. MATERIALS :
TRAY: HIPS, COLOR: BLACK
BOX: CORRUGATED FIBERBOARD
TRANSPARENT BAG: PE
2. DIMENSIONS:
TRAY: L=326;W=136;H=28.2
BOX: L=323;W=285;H=335
3. QUANTITY:
24 PCS/TRAY
480 PCS/BOX
- 4.WEIGHT:
NET WEIGHT: 3.0KG
GROSS WEIGHT: 6.7KG

HARD TRAY PACKING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RICHARD MA 18MAR2013	 TE Connectivity										
		CHK SIMON LI 18MAR2013											
		APVD COREI WANG 18MAR2013	NAME SOCKET ASSEMBLY DDR4 DIMM,T/H TYPE 288 POSITION										
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±1 1 PLC ±0.25 2 PLC ±0.15 3 PLC ±0.10 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-115067		SIZE A200779		DRAWING NO C=2199154		RESTRICTED TO -			
MATERIAL -				APPLICATION SPEC 501-115076		WEIGHT -		SCALE 1:1		SHEET 7 OF 7		REV C	
				CUSTOMER DRAWING									



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.