

**AVERY DENNISON
CABLE TIE PRODUCTS**

Welcome to the Fastener Division of Avery Dennison,

a diversified Fortune 500 company. With sales offices in 24 countries and 200 manufacturing facilities, the company is a recognized leader in producing products that mark, decorate, identify, organize and fasten.

The Fastener Division designs and manufactures a variety of injection molded and extruded products that serve markets worldwide.

Quality

Avery Dennison provides the highest quality cable tie products available. Avery Dennison’s quality system exceeds industry standards set by ISO/QS, UL (Underwriters Laboratories, Inc.) and Military Specifications. We have also earned several prestigious quality certifications such as Ford* Q1 and Self Certification at Chrysler.* We are committed to making continuous improvements to insure that you have the highest quality cable tie products.

Innovative Products

The Fastener Division offers many innovative products. Our Super Bar-Lok®, Ladder Tie, Secur-a-Tie® and Secur-a-Seal™ take advantage of Avery Dennison’s stretching technology. This allows for strong, flexible, lightweight, and economical products which competitors just can’t match.

Service

Our products are available to you through our nationwide network of carefully chosen distributors. There is a distributor in your area who is fully stocked with the products you need. In addition our Sales Specialists are available to assist you in assessing your cable tie requirements, and to provide other support. The Fastener Division realizes that reacting to customer needs is critical so we send orders out the same day we receive them. We strive to be our customers’ best supplier by continuously improving service levels.

We would like to be your cable tie supplier.


* Ford is a registered trademark of the Ford Motor Company. Chrysler is a registered trademark of the Chrysler Corporation.

4-5	Cable Tie Basics
6-7	Installation Tools
8	Miniature Ties/Intermediate Ties
9	Standard Ties
10-11	Heavy Duty Ties/Extra Heavy Duty Ties
12	Super Bar-Lok® Ties
13	Ladder Ties
14-15	Security Ties
16	Slim Line Ties
17-19	Specialty Ties
20-21	Mount Ties
22	Adhesive Backed Mount Selection Chart
23	Accessories
24	Cable Tie Imprinting
25	Identification Ties
26	Custom Parts
27	Military Specification/Underwriters Laboratory
28	Military Specification Cross Reference
29-38	Cross Reference Section
39	Index

BASIC FUNCTION
When applying a tie, the tail is inserted into the head forming a loop with the teeth on the inside. The rails guide the strap through the strap channel and over the pawl. When fully tensioned around the bundle, either by hand or with an installation tool, the pawl will rotate interlocking a pawl tooth with a strap tooth. The tail, which is bent for easy installation may be cut off with an installation tool and discarded.

Some basic industry size and performance criteria are discussed on this page.

Below are the **basic components** of a standard Avery Dennison™ Cable Tie:

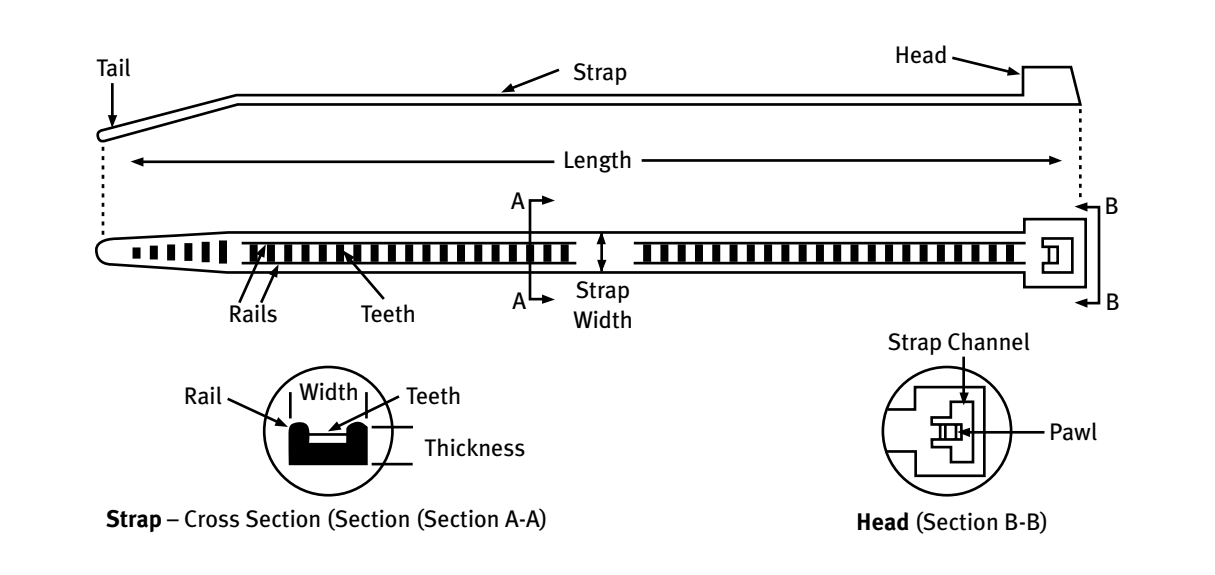

Applications



Wire and Cable Bundling (Harnessing)




Pairing Items



Tagging



Sealing

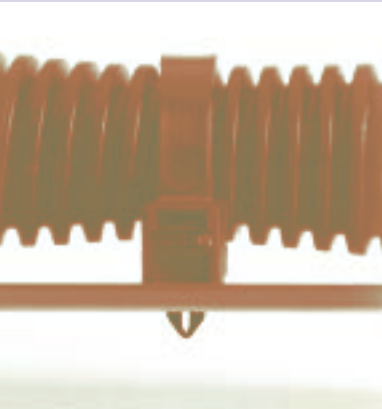

Mounting Applications




Securing Items in Packages (Ex: Toys)

Key Performance Criteria

BUNDLE DIAMETER

The maximum and minimum bundle diameters are the size extremes in which the cable tie will function properly. Avery Dennison™ Cable Tie sizes conform to the industry standards as established by military specifications. Long sizes are for big bundles, and short sizes are for small bundles.

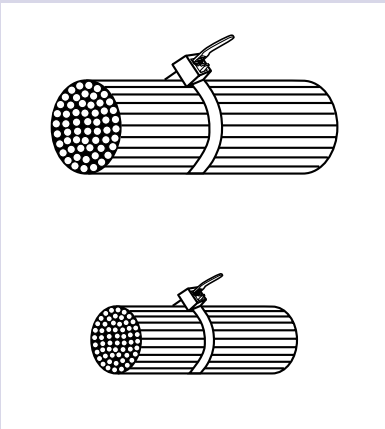

MINIMUM LOOP TENSILE STRENGTH

Minimum loop tensile strength is an important performance characteristic of cable ties. It is the minimum amount of force expressed in pounds that causes the assembled tie to fail and/or cease to perform its function. It is measured by assembling a tie around two split mandrels that are appropriately sized for the particular tie and separated at a speed of one inch per minute until the tie fails. High tensile strength ties are needed for big or heavy loads while lower tensile strength ties are used for small to medium and light loads.

GENERAL MARKET APPLICATIONS

Cable ties are used in a variety of applications in many industries – electrical, electronic, telecommunications, transportation, CATV (Cable TV), HVAC (Heating, Ventilation and Air Conditioning), packaging, retail, fire extinguishers, beverage, and many others.

MATERIAL

Avery Dennison™ Cable Ties are manufactured from Type 6/6 Nylon. This material is noted for its toughness, impact strength, resistance to abrasion and chemicals, and versatility in a variety of applications. Nylon 6/6 is the material of choice per military specifications.

NATURAL (CLEAR)

Used for indoor, general applications.

Temperature Range:

-40°F (-40°C) to 185°F (85°C)

WEATHER RESISTANT

Used primarily for outdoor applications where greater resistance to ultraviolet light is required. Cable ties made of this material contain 2% carbon black, for UV resistance.

Temperature Range:

-40°F (-40°C) to 176°F (80°C)

HEAT STABILIZED

Used for higher temperature applications.

Temperature Range:

-40°F (-40°C) to 221°F (105°C)

POLYPROPYLENE

A specialty material used in applications which require lower tensile strength.

NYLON 6

Mounts, Secur-a-Tie®

COLORS

The 4" and 8" cable ties, as well as Secur-a-Tie® and Secur-a-Seal™ are stocked in 8 different colors. All other cable ties are available in colors upon special request.

THE BAG

Avery Dennison™ Cable Ties are packaged at a specific moisture content in high density polyethylene bags. To insure that cable ties operate at optimal performance during application, the bags should not be opened prior to actual application. Once the cable tie is applied the moisture changes will not affect its performance.

THE BAG LABEL

Cable ties are generally packaged in one of two configurations: bulk and standard. “Bulk” usually refers to one thousand packs and “standard” usually means one hundred packs. Aside from the description and part number, the information which is printed on Avery Dennison™ Cable Tie bags includes the following:

Maximum Bundle Diameter – ranging from 7/8"–10."

Military Specification Number – if applicable.

Strap ID Code – either miniature, intermediate, standard, heavy duty, or extra heavy duty.

MS Installation Tool – usually 90387-1 or 90387-2.

Recommended Tool Tension Setting – the knob on the Avery Dennison installation tool should be within this range. Perceived quality problems can often be solved by simply changing the tension setting to the proper level.

UL Symbol – verification that the part is listed by the Underwriters Laboratory.

HDPE Symbol – this means that the bag (not the product) is produced from high density polyethylene and that it can be recycled.

STANDARD HAND TOOLS
For miniature, intermediate and standard cable ties.

- Heavy duty construction for production line environments
- Designed for operator comfort and safety
- Replacement parts and blades are available

- Guaranteed (no charge with one time warranty card; \$12.95 for repairs of 08480 and usually between \$13 – \$40 for repair of 08381, depending on the problem).

- The pneumatic tool operates at 100 PSI, reduces operator fatigue and risk of repetitive motion disorders as well as increasing productivity.



RECOMMENDED TENSION SETTING

Classification	Setting
Miniature	1-3
Intermediate	3-5
Standard	6-8

PART #	STYLE	MINIMUM ORDER QUANTITY
08480	STANDARD INSTALLATION TOOL FOR MINIATURE, INTERMEDIATE, AND STANDARD CABLE TIES	1
11037	REPLACEMENT BLADES	1



RECOMMENDED TENSION SETTING

Classification	Setting
Miniature	1-3
Intermediate	3-5
Standard	6-8

PART #	STYLE	MINIMUM ORDER QUANTITY
08381	PNEUMATIC INSTALLATION TOOL FOR MINIATURE, INTERMEDIATE, AND STANDARD CABLE TIES	1
11037	REPLACEMENT BLADES	1

To Operate the Tools

08480, 08381, 10639, 10624

- 1 Pull and turn tension adjusting knob to correct number in window of handle. Set the tension according to the classification of the tie being applied. The higher the tension, the tighter the bundle will be tensioned.
- 2 By hand:
 - (a) Wrap cable tie around wire bundle harness, (b) Insert tip through cable tie head and pull snug.
- 3 Hold the nose of the tool up against the extended portion of the tie next to cable tie head so that it lies in the open slot of the tool.
- 4 Squeeze trigger to tighten cable tie to preset tension and cut excess portion. Release trigger and cut portion will eject to the side.

10257

- 1 By hand:
 - (a) Wrap cable tie around wire bundle harness, (b) Insert tip through cable tie head and pull snug.
- 2 Thread the tie through the top hole of the tool.
- 3 Pull the large handle to tension the tie and pull the small handle to cut off the excess portion.

RECOMMENDED TENSION SETTING

Classification	Setting
Standard	1-4
Heavy Duty	6-8

PART #	STYLE	MINIMUM ORDER QUANTITY
10639	HEAVY DUTY INSTALLATION TOOL FOR STANDARD AND HEAVY DUTY CABLE TIES	1



RECOMMENDED TENSION SETTING

Classification	Setting
Miniature	1-3
Intermediate	3-5
Standard	6-8

PART #	STYLE	MINIMUM ORDER QUANTITY
10624	BASIC INSTALLATION TOOL FOR MINIATURE, INTERMEDIATE, AND STANDARD CABLE TIES	1



PART #	STYLE	MINIMUM ORDER QUANTITY
10257	EXTRA HEAVY DUTY INSTALLATION TOOL FOR HEAVY DUTY AND EXTRA HEAVY DUTY CABLE TIES	1



- HEAVY DUTY TOOL**
- Primarily used for 120 lb. heavy duty cable ties, including 14.5," 21," 24," and 28" (can also be used for standard cable ties).
 - Similar construction to our 08480 and 08381
 - Durable, and easy to use
 - Replacement blades are available.

- BASIC TOOL**
- For on the job installations
 - Lightweight
 - Economical

- EXTRA HEAVY DUTY TOOL**
- Used with heavy duty and extra heavy duty cable ties.

THE QUALITY DIFFERENCE.

Avery Dennison sets the toughest standards in the industry. Continuously monitored through statistical process control (SPC), Cable Ties meet all appropriate qualifications for Military Specifications and UL. As a result we have earned several quality awards such as Ford* Q1 and Self Certification at Chrysler*.

** Ford is a registered trademark of the Ford Motor Company. Chrysler is a registered trademark of the Chrysler Corporation.*

AVERY DENNISON™ CABLE TIES are made with type 6/6 nylon for high impact and tensile strength.

They are self-extinguishing – UL 94 Flam. class V2 and non-corrosive.

Operating temperatures from -40°F to 185°F (-40°C to 85°C).

Weather resistant from -40°F to 176°F (-40°C to 80°C).

Heat stabilized from -40°F to 221°F (-40°C to 105°C).



Length: 4"/101.6mm, width: .095"/2.41mm, thickness: .041"/1.04mm

4" (101.6 mm)MINIATURE							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08432	NATURAL	4"/101.6MM	1/16"-7/8"/159MM-22.23MM	18 LBS./8.17KG	MS-3367-4-9	1,000/BAG	25M
08434	NATURAL				MS-3367-4-9	100/BAG	5M
08433	BLACK WEATHER RESISTANT				MS-3367-4-0	1,000/BAG	25M
08435	BLACK WEATHER RESISTANT				MS-3367-4-0	100/BAG	5M
08404	BLACK HEAT STABILIZED					1,000/BAG	25M
08508	RED				MS-3367-4-2	1,000/BAG	10M
08582	ORANGE				MS-3367-4-3	1,000/BAG	10M
08583	YELLOW				MS-3367-4-4	1,000/BAG	10M
08584	GREEN				MS-3367-4-5	1,000/BAG	10M
08587	BLUE				MS-3367-4-6	1,000/BAG	10M



Length: 5.5"/139.7mm, width: .130"/3.30mm, thickness: .048"/1.22mm

5.5" (139.7 mm)INTERMEDIATE							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08376	NATURAL	5.5"/139.7MM	1/16"-1-1/4"/159MM-31.75MM	40 LBS./18.14KG	MS-3367-5-9	1,000/BAG	5M
08383	NATURAL				MS-3367-5-9	100/BAG	5M
08431	BLACK WEATHER RESISTANT				MS-3367-5-0	1,000/BAG	5M
08384	BLACK WEATHER RESISTANT				MS-3367-5-0	100/BAG	5M
08400	BLACK HEAT STABILIZED					1,000/BAG	5M



Length: 8"/203.2mm, width: .130"/3.30mm, thickness: .054"/1.37mm

8" (203.2 mm)INTERMEDIATE							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08377	NATURAL	8"/203.2mm	1/16"-2-1/8"/159mm-53.98mm	40 LBS./18.14kg	MS-3367-5-9	1,000/BAG	5M
08385	NATURAL				MS-3367-5-9	100/BAG	5M
08380	BLACK WEATHER RESISTANT				MS-3367-5-0	1,000/BAG	5M
08386	BLACK WEATHER RESISTANT				MS-3367-5-0	100/BAG	5M
08401	BLACK HEAT STABILIZED					1,000/BAG	5M
08690	RED				MS-3367-5-2	1,000/BAG	5M
08671	BLUE				MS-3367-5-6	1,000/BAG	5M
08782	YELLOW				MS-3367-5-4	1,000/BAG	5M
08664	GREEN				MS-3367-5-5	1,000/BAG	5M



Length: 7.5"/190.5mm, width: .177"/4.50mm, thickness: .050"/1.27mm

7.5" (190.5 mm)STANDARD							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08387	NATURAL	7.5"/190.5mm	1/16"-1-3/4"/159mm-44.45mm	50 LBS./22.68kg	MS-3367-1-9	1000/BAG	5M
08436	NATURAL				MS-3367-1-9	100/BAG	5M
08388	BLACK WEATHER RESISTANT				MS-3367-1-0	1000/BAG	5M
08437	BLACK WEATHER RESISTANT				MS-3367-1-0	100/BAG	5M
08402	BLACK HEAT STABILIZED					1000/BAG	5M



Length: 11"/279.4mm, width: .177"/4.50mm, thickness: .053"/1.35mm

11" (279.4 mm)STANDARD							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08600	NATURAL	11"/279.4mm	1/16"-3"/159mm-76.2mm	50 LBS./22.68kg	MS-3367-7-9	1000/BAG	5M
08859	NATURAL				MS-3367-7-9	100/BAG	5M
08286	BLACK WEATHER RESISTANT				MS-3367-7-0	1000/BAG	5M
08930	BLACK WEATHER RESISTANT				MS-3367-7-0	100/BAG	5M
08056	BLACK HEAT STABILIZED					1000/BAG	5M



Length: 15"/381mm, width: .177"/4.50mm, thickness: .053"/1.35mm

15" (381 mm)STANDARD							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10036	NATURAL	15"/381mm	1/16"-4"/159mm-101.6mm	50 LBS./22.68kg	MS-3367-2-9	500/BAG	5M
08427	NATURAL				MS-3367-2-9	100/BAG	1M
10037	BLACK WEATHER RESISTANT				MS-3367-2-0	500/BAG	5M
08428	BLACK WEATHER RESISTANT				MS-3367-2-0	100/BAG	1M
10408	BLACK HEAT STABILIZED					500/BAG	5M
08416	BLACK HEAT STABILIZED					100/BAG	1M


INNOVATIVE PRODUCTS.

The Fastener Division entered the cable tie market over 25 years ago by developing innovative products through our unique stretching process. Some of the unique products we have developed over the years include Super Bar-Lok®, Ladder Tie, and Secur-A-Tie®.

CHANCES ARE, WE HAVE A CABLE TIE FOR YOUR APPLICATION. Avery Dennison™ Cable Ties are available in sizes from 4" (101.6mm) to 34" (863.6mm) and in three different materials. With tensile strength ratings up to 175 lbs. (79kg) and a wide variety of accessory ties, cable tie mounts, and installation tools, we have the product to serve your needs.



Heavy-Duty ties are used for bundles up to 10" (254mm) in diameter.



Length: 14.5" / 368.3mm, width: .251" / 6.38mm, thickness: .074" / 1.88mm

14.5" (368.3 mm) HEAVY DUTY							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10038	NATURAL	14.5" / 368.3mm	3/16"-4" / 4.76mm-101.6mm	120 LBS. / 54.43kg	MS-3367-3-9	100/BAG	1M
08378	NATURAL				MS-3367-3-9	50/BAG	1M
10039	BLACK WEATHER RESISTANT				MS-3367-3-0	100/BAG	1M
08382	BLACK WEATHER RESISTANT				MS-3367-3-0	50/BAG	1M
08403	BLACK HEAT STABILIZED					100/BAG	1M



Length: 21" / 533.4mm, width: .303" / 7.70mm, thickness: .075" / 1.91mm

21" (533.4 mm) HEAVY DUTY							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10606	NATURAL	21" / 533.4mm	1/4"-6" / 4.76mm-152.4mm	120 LBS. / 54.43kg	MS-3367-3-9	50/BAG	1M
10608	BLACK WEATHER RESISTANT				MS-3367-3-0	50/BAG	1M
10607	BLACK HEAT STABILIZED					50/BAG	1M



Length: 24" / 609.6mm, width: .303" / 7.70mm, thickness: .075" / 1.91mm

24" (609.6 mm) HEAVY DUTY							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10612	NATURAL	24" / 609.6mm	1/4"-7" / 4.76mm-177.8mm	120 LBS. / 54.43kg	MS-3367-3-9	50/BAG	1M
10614	BLACK WEATHER RESISTANT				MS-3367-3-0	50/BAG	1M
10613	BLACK HEAT STABILIZED					50/BAG	1M



Length: 28" / 711.2mm, width: .303" / 7.70mm, thickness: .075" / 1.91mm

28" (711.2 mm) HEAVY DUTY							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10618	NATURAL	28" / 711.2mm	1/4"-8" / 4.762mm-203.2mm	120 LBS. / 54.43kg	MS-3367-6-9	50/BAG	1M
10620	BLACK WEATHER RESISTANT				MS-3367-6-0	50/BAG	1M
10619	BLACK HEAT STABILIZED					50/BAG	1M



Length: 34" / 863.6mm, width: .350" / 8.89mm, thickness: .086" / 2.18mm

34" (863.6 mm) EXTRA HEAVY DUTY							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10049	NATURAL	34" / 863.6mm	1/4"-10" / 4.76mm-254mm	175 LBS. / 79kg		50/BAG	500
10050	BLACK WEATHER RESISTANT					50/BAG	500

Avery Dennison has a network of fully trained distributors. There is one in your area who can answer your questions or quickly deliver the parts you need. For additional information or to help identify your needs, call a distributor today or call us and we will refer you to one.

SUPER BAR-LOK® CABLE TIES are superior to conventional cable ties.

HIGHER TENSILE STRENGTH
Exceeds military specification tensile strength test of 50 lbs. Perfect for any application requiring an extra strong tie with a minimum cross section.

WEIGHS LESS
A natural fit for applications where weight is important (ie. aerospace, marine, aviation and automotive industries).

MORE FLEXIBLE thus, easier to apply.

VIRTUALLY NO CREEP
Super Bar-Lok® will not loosen or relax even under conditions of high heat, humidity, or vibration.

MORE RESISTANT to environmental extremes, extreme temperatures, ultraviolet light, and salt water spray.

SURVIVES CYCLIC SHOCK FATIGUE
up to 70% longer than competitive ties under severe shock and vibration conditions.

PETROCHEMICAL RESISTANCE
Perfect in applications where grease, oil and fuels are present.



Fastening wire harnesses is a typical application where Avery Dennison provides superior strength and performance.

A large capital equipment manufacturer uses them to hold hoses in the engine area. They chose Super Bar-Lok® because this product resists petro-chemicals better than traditional cable ties and holds up better in high vibration environments.



Length: 7.5"/190.5mm, width: .195"/4.95mm, thickness: .038"/.97mm

7.5" (190.5 mm) SUPER BAR-LOK®							
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10001	SUPER BAR-LOK® NATURAL	7.5"/190.5mm	1/16"-1-3/4"/1.59mm-44.45mm	50 LBS./22.68kg	MS-3367-1-9	1000/BAG	5M
10004	SUPER BAR-LOK® NATURAL				MS-3367-1-9	100/BAG	5M
10003	SUPER BAR-LOK® BLACK H/S				MS-3367-1-0	1000/BAG	5M
10005	SUPER BAR-LOK® BLACK H/S				MS-3367-1-0	100/BAG	5M



Length: 15"/381mm width: .195"/4.95mm, thickness: .038"/.97mm

15" (381 mm) SUPER BAR-LOK®							
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10344	SUPER BAR-LOK® NATURAL	15"/381mm	1/16"-4"/1.59mm-101.6mm	50 LBS./22.68kg	MS-3367-2-9	500/BAG	5M
10006	SUPER BAR-LOK® NATURAL				MS-3367-2-9	100/BAG	1M
10345	SUPER BAR-LOK® BLACK H/S				MS-3367-2-0	500/BAG	5M
10008	SUPER BAR-LOK® BLACK H/S				MS-3367-2-0	100/BAG	1M

Ladder Ties' flexibility and economical value are the preferred choice in many packaging applications.




Length: 7"/177.8mm, width: .140"/3.56mm, thickness: .040"/1.02mm

7" (177.8 mm) LADDER STYLE						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08470	NATURAL	7"/177.8mm	1/16"-1-3/4"/1.59mm-44.45mm	40 LBS./18.14kg	1000/BAG	5M
08476	NATURAL				100/BAG	5M
08472	BLACK HEAT STABILIZED				1000/BAG	5M
08478	BLACK HEAT STABILIZED				100/BAG	5M



Length: 11"/279.4mm, width: .140"/3.56mm, thickness: .040"/1.02mm

11" (279.4 mm) LADDER STYLE						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08471	NATURAL	11"/279.4mm	1/16"-3"/1.59mm-76.2mm	40 LBS./18.14kg	1000/BAG	5M
08477	NATURAL				100/BAG	5M
08473	BLACK HEAT STABILIZED				1000/BAG	5M
08479	BLACK HEAT STABILIZED				100/BAG	5M

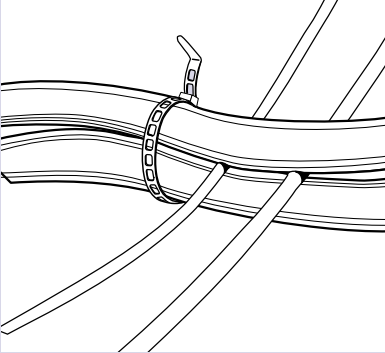

Ladder Ties are used for securing hoses under the hoods of automobiles. Avery Dennison™ Cable Ties are also used for in-dash/ under-dash wiring, brake lines along chassis, and many other applications in the automotive industry.

DON'T BE FOOLED BY THE HOLES, LADDER TIES ARE STRONG ENOUGH FOR THE JOB! They are also more flexible, and more economical. No wonder they are a favorite choice in the automotive and retail industries.

WEIGH LESS THAN CONVENTIONAL CABLE TIES
A natural fit for applications where weight is important such as aerospace, marine, aviation and automotive industries.

MORE FLEXIBLE THAN CONVENTIONAL CABLE TIES
Easy to use.

APPROVED BY THE BIG THREE AUTOMOTIVE COMPANIES
You know that it's a high quality product.

VERSATILE AND ECONOMICAL
Cost effective solution for pairing, tagging, securing, and bundling.

SECUR-A-TIE® FASTENERS, AN AVERY DENNISON INNOVATION. Commonly used in the retail market for tagging and securing merchandise, Secur-A-Tie® offers economical bundling and attaching solutions. Secur-A-Tie® is also used in other markets, particularly when cost is an important consideration.



Length: 5"/127mm, thickness: .070"/1.78mm dia.

5" (127 mm) SECUR-A-TIE®						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08350	NATURAL	5"/127mm	1/16"-1.3/16"/1.59mm-30.16mm	18 LBS./8.16kg	5000/BOX	50M
10673	NATURAL				1000/BAG	20M
08354	RED				5000/BOX	20M
08355	YELLOW				5000/BOX	20M
08356	BLUE				5000/BOX	20M
08358	ORANGE				5000/BOX	20M
08359	BLACK				5000/BOX	20M
08357	GREEN				5000/BOX	20M
08362	NATURAL POLYPROPYLENE			8 LBS./3.63kg	5000/BOX	50M



Length: 8"/203.2mm, thickness: .070"/1.78mm dia.

8" (203.2 mm) SECUR-A-TIE®						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08320	NATURAL	8"/203.2mm	1/16"-2"/1.59mm-50.8mm	18 LBS./8.16kg	2000/BOX	20M

You can depend on Secur-A-Tie® fasteners; permanent locking loop fasteners that adjust for a custom fit.

Secur-A-Seal™ is the perfect solution for tamper evident applications such as fire extinguisher pins.



Length: 8"/203.2mm, thickness: .070"/1.78mm dia.

8" (203.2 mm) SECUR-A-SEAL™						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08319	NATURAL	8"/203.2mm	1/16"-2"/1.59mm-50.8mm	8 LBS./3.63kg	2000/BOX	20M
10146	RED				2000/BOX	20M
10147	ORANGE				2000/BOX	20M
10148	YELLOW				2000/BOX	20M
10149	GREEN				2000/BOX	20M
10150	BLUE				2000/BOX	20M
10154	BLACK				2000/BOX	20M
10155	WHITE				2000/BOX	20M



Length: 5"/127mm, width: 11"/2.8mm, thickness: .04"/1.1mm

5" (127 mm) SECURITY TIE						
PART #	MATERIAL/STYLE	LENGTH	DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
20064-0	BLACK	5"/127mm	1.5"/38.1mm	30 LBS./13.6kg	1000/BAG	5M
20064-B	BLUE	5"/127mm	1.5"/38.1mm	30 LBS./13.6kg	1000/BAG	5M
20064-G	GREEN	5"/127mm	1.5"/38.1mm	30 LBS./13.6kg	1000/BAG	5M
20064-R	RED	5"/127mm	1.5"/38.1mm	30 LBS./13.6kg	1000/BAG	5M




Length: 7"/181mm, width: 11"/2.8mm, thickness: .04"/1.1mm

7" (181 mm) SECURITY TIE						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
20004-0	BLACK	7"/181mm	2.1"/53.3mm	30 LBS./13.6kg	1000/BAG	5M
20004-G	GREEN	7"/181mm	2.1"/53.3mm	30 LBS./13.6kg	1000/BAG	5M
20004-B	BLUE	7"/181mm	2.1"/53.3mm	30 LBS./13.6kg	1000/BAG	5M
20004-R	RED	7"/181mm	2.1"/53.3mm	30 LBS./13.6kg	1000/BAG	5M

SECUR-A-SEAL™ offers economical bundling along with a tamper evident head design. Secur-A-Seal™ is UL listed and is used for applications requiring a lower tensile strength. Secur-A-Seal™ is manufactured from polypropylene.

The Security Tie is revolutionizing the ski industry by addressing a growing problem in ski areas and resorts throughout the United States—revenue lost by skiers “sharing” or re-using lift tickets. Fastening lift tickets with a standard cable tie or some other non-secure method provides skiers with the option of removing their tickets and reselling them to other skiers. Consequently, the ski areas lose sales. The Avery Dennison™ Security Tie is a safe, affordable, and versatile alternative for tamper-resistant, dependable closures. It is available in several colors and contains no protruding parts, ensuring user safety. Applications for this tie include but are not limited to ski areas. These ties can be used in any situation where a fixed bundle and a tamper-resistant closure are necessary.

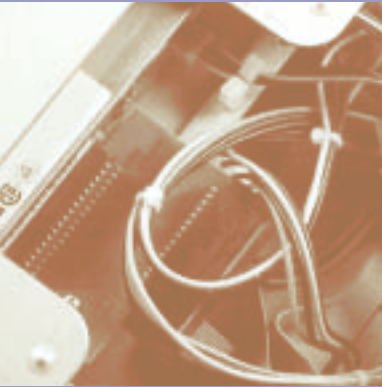

Less is more with Slim Line Ties

Slim line ties have a smaller head and a narrower cross section allowing the product to be used where space is limited.




Length: 6"/152.4mm, width: .094"/2.39mm, thickness: .044"/1.18mm

6" (152.4mm)SLIM LINE							
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10391	NATURAL	6"/152.4mm	1/16"–1-1/2"/1.59mm–38.1mm	18 LBS./8.16kg	MS-3367-4-9	1000/BAG	5M
10394	NATURAL				MS-3367-4-9	100/BAG	5M
10393	BLACK WEATHER RESISTANT				MS-3367-4-0	1000/BAG	5M
10396	BLACK WEATHER RESISTANT				MS-3367-4-0	100/BAG	5M
10392	BLACK HEAT STABILIZED					1000/BAG	5M



Length: 8"/203.2mm, width: .099"/2.52mm, thickness: .044"/1.12mm

8" (203.2mm)SLIM LINE							
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10325	NATURAL	8"/203.2mm	1/16"–2-1/8"/1.59mm–53.98mm	18 LBS./8.17kg	MS-3367-4-9	1000/BAG	5M
10328	NATURAL				MS-3367-4-9	100/BAG	5M
10327	BLACK WEATHER RESISTANT				MS-3367-4-0	1000/BAG	5M
10330	BLACK WEATHER RESISTANT				MS-3367-4-0	100/BAG	5M
10326	BLACK HEAT STABILIZED					1000/BAG	5M




Length: 11.5"/292.1mm, width: .140"/3.56mm, thickness: .055"/1.40mm

11.5" (292.1mm)SLIM LINE							
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10985	NATURAL	11.5"/292.1mm	1/16"–3-5/32"/1.59mm–80.26mm	40 LBS./18.14kg	MS-3367-5-9	1000/BAG	5M



Length: 15"/381mm, width: .140"/3.56mm, thickness: .055"/1.40mm

15" (381mm)SLIM LINE							
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
10335	NATURAL	15"/381mm	1/16"–4"/1.59mm–101.6mm	40 LBS./18.14kg		1000/BAG	5M
10338	NATURAL					100/BAG	1M
10336	BLACK HEAT STABILIZED					1000/BAG	5M
10339	BLACK HEAT STABILIZED					100/BAG	1M



CUT TO DESIRED LENGTH				CONTINUOUS ROLLS			
PART NO.	DESCRIPTION			MINIMUM LOOP TENSILE STRENGTH	PACKAGING		
10994	15'/4572mm ROLL, BLACK, 1/2" WIDTH/12.7mm			50 LBS./22.68kg	1 ROLL/BAG; 10 BAGS/CARTON		
10995	15'/4572mm ROLL, BLACK, 3/4" WIDTH/19.05mm			50 LBS./22.68kg	1 ROLL/BAG; 10 BAGS/CARTON		



ROLL WITH PERFORATIONS				STRIP TIES			
PART NO.	DESCRIPTION			MINIMUM LOOP TENSILE STRENGTH	PACKAGING		
10996	6"/152.4mm STRIP TIES, BLACK, 1/2" WIDTH/12.7mm			50 LBS./22.68kg	10 TIES/ROLL; 1 ROLL/BAG; 10 BAGS/CARTON		
10997	12"/304.8mm STRIP TIES, BLACK, 1/2" WIDTH/12.7mm			50 LBS./22.68kg	10 TIES/ROLL; 1 ROLL/BAG; 10 BAGS/CARTON		
10998	18"/457.2mm STRIP TIES, BLACK, 3/4" WIDTH/19.05mm			50 LBS./22.68kg	10 TIES/ROLL; 1 ROLL/BAG; 10 BAGS/CARTON		



SLOTTED HEAD, CAN BE ANCHORED WITH A SCREW				LOOP TIES			
PART NO.	DESCRIPTION			MINIMUM LOOP TENSILE STRENGTH	PACKAGING		
10999	8"/203.2mm LOOP TIES, BLACK, 1" WIDTH/25.4mm			40 LBS./18.14kg	10 TIES/ROLL; 1 ROLL/BAG; 10 BAGS/CARTON		
11000	12"/304.8mm LOOP TIES, BLACK, 1" WIDTH/25.4mm			40 LBS./18.14kg	10 TIES/ROLL; 1 ROLL/BAG; 10 BAGS/CARTON		



RING ON TOP ALLOWS FOR TIGHT CINCHING				CINCH TIES			
PART NO.	DESCRIPTION			MINIMUM LOOP TENSILE STRENGTH	PACKAGING		
11002	12"/304.8mm CINCH TIES, BLACK, 3/4" WIDTH/19.05mm			50 LBS./22.68kg	10 TIES/BAG; 10 BAGS/CARTON		
11003	18"/457.2mm CINCH TIES, BLACK, 3/4" WIDTH/19.05mm			50 LBS./22.68kg	10 TIES/BAG; 10 BAGS/CARTON		

ASSORTMENT PACK							
PART NO.	DESCRIPTION						PACKAGING
11004	ONE BAG OF EACH TYPE OF VELCRO® TIE						9 BAGS/CARTON




VELCRO® brand hook and loop fasteners are available in several types and sizes as well as cut to length rolls. All VELCRO® products are packaged in a printed bag with the Avery Dennison logo.

- FEATURES
- Eliminates the potential for damage to fiber optics or cables caused by overcinching or accidental cutting
 - Easy to install and adjust without installation tools
 - Re-usable


- APPLICATIONS
- Wire and cable assemblies
 - Fiber optic installations
 - Network installations
 - Electrical/electronics products

Avery Dennison has a network of fully trained distributors. There is one in your area who can answer your questions or quickly deliver the parts you need. For additional information or to help identify your needs, call a distributor today or call us and we will refer you to one.

For products with a fixed bundle diameter, use **Merchandise Pairing Ties™ and Stopper Ties.** These products have a unique “stop” which allows for a consistent bundle diameter, perfect when you want to prevent your bundle from being cinched up tightly.





11" (279.4 mm)MERCHANDISE PAIRING TIES						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10700	MERCHANDISE PAIRING TIE	11"/279.4mm	3.25"/82.55mm	40 LBS./18.14kg	1000/BAG	5M




8," 11," 21" (203.2 mm/279.4mm/533.4mm)STOPPER TIES						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10319	BLACK/HS STOPPER	8"/203.2mm	1.6"/40.64mm	40 LBS./18.14kg	1000/BAG	5M
10406	BLACK/HS STOPPER	8"/203.2mm	1.3"/33.02mm	40 LBS./18.14kg	1000/BAG	5M
10660	BLACK/HS STOPPER	11"/279.4mm	2.0"/50.8mm	50 LBS./22.68kg	1000/BAG	5M


Flip-Clip Fasteners can be easily repositioned or removed and eliminate the need for installation tools. With a bundle diameter of up to 1/2" (12.7mm), this product is offered in bags or in our proprietary “on the reel” packaging.

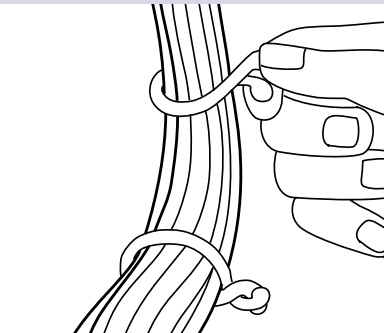


FLIP-CLIP						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08317	PKG. IN A REEL	1.18"/29.97mm	1/2"/12.7mm		500/REEL	5M
08316	PKG. LOOSE		1/2"12.7mm		1000/BAG	5M




7.5" (190.5 mm)DOUBLE HEADED CABLE TIES						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10424	NATURAL DOUBLE HEADED	7.5"/190.5mm	1/16"-1-3/4"/1.559mm-44.45mm	50/50 LBS./22.68kg	1000/BAG	5M
10427	NATURAL DOUBLE HEADED				100/BAG	5M
10425	BLACK/HS/DOUBLE HEADED				1000/BAG	5M
10428	BLACK/HS/DOUBLE HEADED				100/BAG	5M
10426	BLACK/WR/DOUBLE HEADED				1000/BAG	5M



11" (279.4 mm)DOUBLE HEADED CABLE TIES						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10430	NATURAL DOUBLE HEADED	11"/279.4mm	1/16"-3"/1.59mm-76.2mm	50/50 LBS./22.68kg	1000/BAG	5M
10431	BLACK/HS/DOUBLE HEADED				1000/BAG	5M
10432	BLACK/WR/DOUBLE HEADED				1000/BAG	5M




7.5" (190.5 mm)RELEASABLE CABLE TIES						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10361	NATURAL RELEASABLE	7.5"/190.5mm	1/16"-1-3/4"/1.59mm-44.45mm	50 LBS./22.68kg	1000/BAG	5M
10364	NATURAL RELEASABLE				100/BAG	5M
10362	BLACK/HS/RELEASABLE				1000/BAG	5M
10363	BLACK/WR/RELEASABLE				1000/BAG	5M
10366	BLACK/WR/RELEASABLE				100/BAG	5M




11" (279.4 mm)RELEASABLE CABLE TIES						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10367	NATURAL RELEASABLE	11"/279.4mm	1/16"-3"/1.59mm-76.2mm	50 LBS./22.68kg	1000/BAG	5M
10370	NATURAL RELEASABLE				100/BAG	1M
10368	BLACK/HS/RELEASABLE				1000/BAG	5M
10369	BLACK/WR/RELEASABLE				1000/BAG	5M

MORE SPECIALTY TIES...
PERFECT FOR PROTOTYPING OR FOR
DOING TWO JOBS AT ONCE.

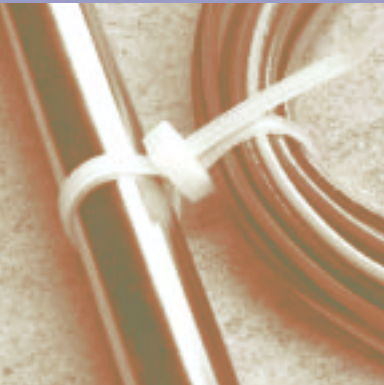

Double Headed cable ties can be used to bundle and position harnesses.


Double headed cable ties allow you to harness two bundles simultaneously or provide a means to position and anchor a single harness (shown below).

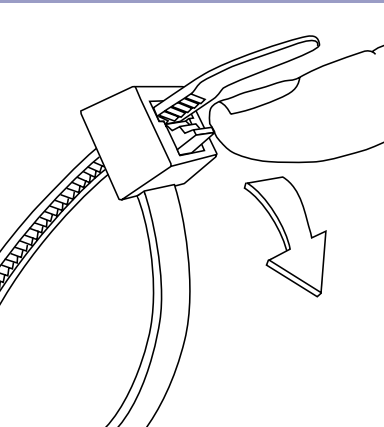

Releasable cable ties are used for prototype installations or for equipment requiring frequent modifications or service. Simply press tab to remove tie.

Releasable Cable Ties are easy to use and can be used again and again.

HAVE A SPECIAL APPLICATION? Specialty ties from Avery Dennison are ideal for securing harnesses (screw mounts and push mounts), prototyping (releasables), harnessing two bundles simultaneously (double headed), and for identification purposes (ID ties).

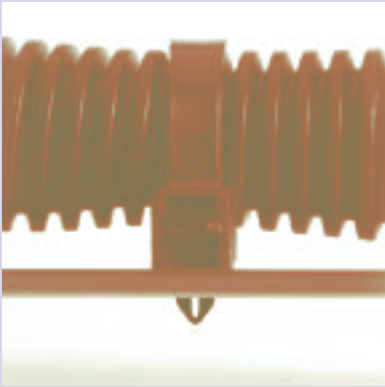


ONE STEP FASTENING... Push-Mount cable ties from Avery Dennison. Simply push into a pre-drilled hole for a simple and secure one piece harness. Winged Push-Mount ties are for variable panel thicknesses up to 1/8" (3.175mm) and a hole diameter of 1/4" (6.35mm).




Length: 7.5"/190.5mm, width: .177"/4.50mm, thickness: .050"/1.27mm

7.5" (190.5 mm) PUSH-MOUNT						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08414	NATURAL PUSH MOUNT	7.5"/190.5mm	1/16"-1-3/4"/1.59mm-44.45mm	50 LBS./22.68kg	1000/BAG	5M
08439	NATURAL PUSH MOUNT				100/BAG	5M
08445	BLACK/HS/PUSH MOUNT				1000/BAG	5M
08446	BLACK/WR/PUSH MOUNT				1000/BAG	5M



Length: 11"/279.4mm, width: .177"/4.50mm, thickness: .050"/1.27mm



11" (279.4 mm) PUSH-MOUNT						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10355	NATURAL PUSH MOUNT	11"/279.4mm	1/16"-3"/1.59mm-76.2mm	50 LBS./22.68kg	1000/BAG	5M
10359	BLACK/WR/PUSH MOUNT				100/BAG	1M



Length: 4"/101.6mm, width: .095"/2.41mm, thickness: .039"/.99mm


4" (101.6 mm) WINGED PUSH-MOUNT						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10690	NATURAL WINGED PUSH MOUNT	4"/101.6mm	1/16"-7/8"/1.59mm-22.23mm	18 LBS./8.16kg	1000/BAG	5M
10691	BLACK/HS/WINGED PUSH MOUNT				1000/BAG	5M

Screw Mount Ties are preferred when position is critical or the operation requires the product be pre-mounted to a surface before final assembly.

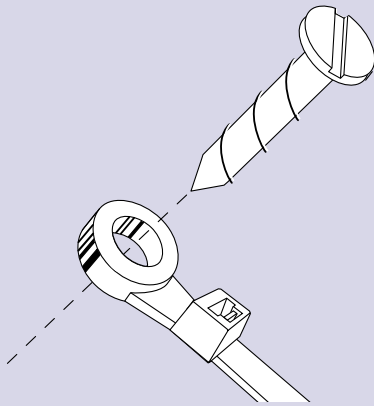

Length: 7.5"/190.5mm, width: .177"/4.50mm, thickness: .055"/1.40mm

7.5" (190.5 mm) for #10 screws SCREW MOUNT						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
08415	NATURAL SCREW MOUNT	7.5"/190.5mm	1/16"-1-3/4"/1.59mm-44.45mm	50 LBS./22.68kg	1000/BAG	5M
08484	NATURAL SCREW MOUNT				100/BAG	5M
08443	BLACK/HS/SCREW MOUNT				1000/BAG	5M
08444	BLACK/WR/SCREW MOUNT				1000/BAG	5M
08318	BLACK/WR/SCREW MOUNT				100/BAG	5M



Length: 11"/279.4mm, width: .177"/4.50mm, thickness: .050"/1.27mm

11" (279.4 mm) for #10 screws SCREW MOUNT						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10350	NATURAL SCREW MOUNT	11"/279.4mm	1/16"-3"/1.59mm-76.2mm	50 LBS./22.68kg	1000/BAG	5M
10351	BLACK/HS/SCREW MOUNT				1000/BAG	5M
10352	BLACK/WR/SCREW MOUNT				1000/BAG	5M
10354	BLACK/WR/SCREW MOUNT				100/BAG	1M



Length: 14.5"/368.3mm, width: .250"/6.35mm, thickness: .075"/1.91mm

14.5" (368.3 mm) for 1/4" (6.35 mm) screws SCREW MOUNT TIE						
PART #	MATERIAL/STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	PKG QTY	CASE QTY
10035	NATURAL SCREW MOUNT	14.5"/368.3mm	3/16"-3.5"/4.76mm-101.6mm	120 LBS./54.43kg	100/BAG	1M
08426	NATURAL SCREW MOUNT				50/BAG	1M
08441	BLACK/HS/SCREW MOUNT				100/BAG	1M
10040	BLACK/WR/SCREW MOUNT				100/BAG	1M

FOR AN ADDED DIMENSION OF SECURITY, AVERY DENNISON™ SCREW-MOUNT TIES. Easily applied, these cable ties keep your application secure and positioned exactly where it needs to be.

FEATURES OF 3/4" (19.05mm) AND 1" (25.4mm) MOUNTS:

Made of Nylon for high impact and tensile strength.

Nylon operating temperatures from -40°F to 185°F (-40°C to 85°C).

Four-way tie insertion speeds assembly. Cable ties slide easily into mounts from any of the four sides.

Adhesive-backed mounts conform to minor surface irregularities.

Adhesive mounts available in rubber and acrylic. Rubber has a quicker set and moderate strength. Acrylic has a longer set and a higher strength. Refer to the selection guide to choose the best mount for your application.

Load carrying capability for 1" (25mm) adhesive-backed mounts is 0.5 lbs. (.23 kg); 3/4" (19mm) mounts is 0.25 lb. (.11 kg).

Stocked in natural color. Other colors available on request.


Adhesive mounts are packaged 2 per strip making it easy and fast to mount and tie your assembly.





MOUNT APPLICATION	ADHESIVE SELECTION	
	RUBBER	ACRYLIC
PAPER/CARDBOARD	X	
STEEL/ALUMINUM	X	X
GLASS/CERAMICS		X
RUBBER	X	
PAINTED SURFACES	X	X
CLOTH	X	
RIGID VINYL	X	X
PLASTICIZED VINYL		X
POLYPROPYLENE/POLYETHYLENE	X	
ABS ACRYLICS	X	
POLYSTYRENE	X	X
URETHANE	X	

PAINTED SURFACES	SURFACE SELECTION	
	RUBBER	ACRYLIC
POLENE	X	
URETHANE	X	
SILICONE	X	
LATEX	X	
ENAMEL		X
ACRYLIC		X


	RELATIVE SOLVENT RESISTANCE	TEMP. PERFORMANCE			RELATIVE SHEAR STRENGTH	PEEL STRENGTH	
		LOW	CONTIN.	HIGH INTERMIT.		INITIAL	ULTIMATE
RUBBER	MEDIUM	-20°F/28.9°C	150°F/65.6°C	200°F/93.3°C	HIGH	HIGH	HIGH
ACRYLIC	HIGH	-20°F/28.9°C	180°F/82.2°C	375°F/190.6°C	VERY HIGH	MEDIUM	HIGH

Length: .750"/19.05mm Width: .380"/9.65mm Thickness: .210"/5.33mm			
TIE ANCHOR BASE			
PART #	MATERIAL/STYLE	PKG QTY	CASE QTY
10027	TIE ANCHOR BASE #8 SCREW	100/BAG	1M
10028	TIE ANCHOR BASE #10 SCREW	100/BAG	1M

Length: (3/4"/19.05mm mount) .835"/21.21mm Width: .835"/21.21mm Thickness: .190"/4.83mm; (1"/25.4mm mount) 1.090"/27.69mm x 1.090"/27.69mm x .275"/6.99mm			
ADHESIVE MOUNT			
PART #	MATERIAL/STYLE	PKG QTY	CASE QTY
08461	3/4"/19.05mm ACRYLIC ADHESIVE MOUNT FOR MINIATURE TIES & INTERMEDIATE TIES	100/BAG	1M
10029	3/4"/19.05mm RUBBER BASED ADHESIVE MOUNT FOR MINIATURE TIES AND INTERMEDIATE TIES	100/BAG	1M
08462	1"/25.4mm ACRYLIC ADHESIVE MOUNT FOR INTERMEDIATE AND STANDARD TIES	100/BAG	1M
10030	1"/25.4mm RUBBER BASED ADHESIVE MOUNT FOR INTERMEDIATE AND STANDARD TIES	100/BAG	1M

Length: 1.080"/27.43mm Width: 1.080"/27.43mm Thickness: .260"/6.60mm			
SCREW MOUNT			
PART #	MATERIAL/STYLE	PKG QTY	CASE QTY
08463	1"/25.4mm PLAIN BACKED SCREW MOUNT FOR INTERMEDIATE AND STANDARD TIES	100/BAG	1M

Length: .620"/15.75mm Width: .430"/10.92mm Thickness: .295"/7.49mm			
PUSH-IN MOUNT			
PART #	MATERIAL/STYLE	PKG QTY	CASE QTY
10056	PUSH-IN MOUNT 1/4"/6.35mm HOLE	100/BAG	1M

Length: 1.500"/38.1mm Width: .755"/19.18mm Thickness: .030"/.76mm			
IDENTIFICATION PLATE			
PART #	MATERIAL/STYLE	PKG QTY	CASE QTY
08457	IDENTIFICATION PLATE 1-1/2"-3/4"/38.1mm-19.05mm	100/BAG	1M

Length: 1.060"/26.92mm Width: 1.060"/26.92mm Thickness: .060"/1.52mm			
ADHESIVE FLAT CABLE CLIP			
PART #	MATERIAL/STYLE	PKG QTY	CASE QTY
08406	ADHESIVE FLAT CABLE CLIP	100/BAG	1M

			
CRADLE MOUNT			
SMALL #4 SCREW Length: .540"/13.72mm, width: .340"/8.64mm, thickness: .230"/5.84mm			
MEDIUM #8 SCREW Length: .720"/18.29mm, width: .520"/13.21mm, thickness: .330"/8.38mm			
LARGE #10 SCREW Length: 1.040"/26.42mm, width: .640"/16.26mm, thickness: .420"/10.67mm			
1/4"/6.35mm SCREW Length: 1.040"/26.42mm, width: .640"/16.26mm, thickness: .420"/10.67mm			

PART #	MATERIAL/STYLE	PKG QTY	CASE QTY
10044	CRADLE MOUNT SMALL #4 SCREW	100/BAG	1M
10045	CRADLE MOUNT MEDIUM #8 SCREW	100/BAG	1M
10046	CRADLE MOUNT LARGE #10 SCREW	100/BAG	1M
10079	CRADLE MOUNT LARGE 1/4"/6.35mm SCREW BLACK HEAT STABILIZED	100/BAG	1M


CABLE TIE MOUNTS STABILIZE AND SECURE WIRING BUNDLES IN A VARIETY OF APPLICATIONS. For additional information or to help identify your needs call a distributor today or call us and we will refer you to a distributor. You may already be working with them!

Length: 4"/101.6mm, width: .095"/2.41mm, thickness: .041"/1.04mm


4" (101.6 mm) IDENTIFICATION CABLE TIES							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08412	NATURAL ID	4"/101.6mm	3/16"-7/8"/4.77mm-22.23mm	18 LBS./8.16kg	MS-3368-5-9E	1000/BAG	5M
08417	NATURAL ID				MS-3368-5-9E	100/BAG	5M
10687	NATURAL FLAG ID		1/16"-7/8"/1.59mm-22.23mm			1000/BAG	5M
10031	WHITE ID		3/16"-7/8"/4.76mm-22.23mm			1000/BAG	5M

Length: 7.5"/190.5mm, width: .177"/4.50mm, thickness: .048"/1.22mm

7.5" (190.5 mm) IDENTIFICATION CABLE TIES							
PART #	MATERIAL/ STYLE	LENGTH	BUNDLE DIAMETER MIN.-MAX.	MINIMUM LOOP TENSILE STRENGTH	MILITARY SPECIFICATION	PKG QTY	CASE QTY
08413	NATURAL ID	7.5"/190.5mm	3/8"-1-3/4"/9.53mm-44.45mm	50 LBS./22.68kg	MS-3368-1-9A	1000/BAG	5M
08419	NATURAL ID				MS-3368-1-9A	100/BAG	5M

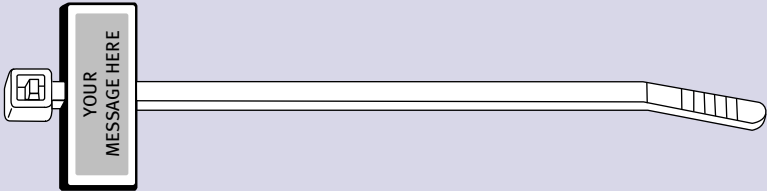

Tag size: 1"/25.4mm x .312"/7.93mm
Part Numbers: 08412, 08417, 10031

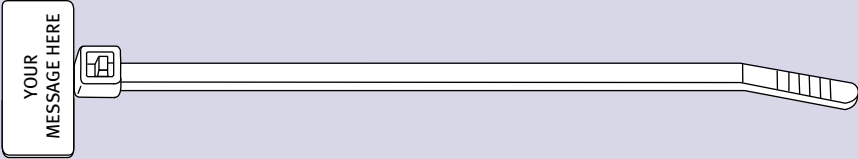

Tag size: .80"/20.32mm x .37"/9.4mm
Part Number: 10687



Tag size: .510"/12.96mm x 1.120"/28.45mm
Part Numbers: 08413, 08419



CABLE TIE MARKING PENS			
PART #	STYLE	PKG QTY	CASE QTY
08506	BLACK MARKING PEN	12 CT	16

MAKE YOUR MARK WITH AVERY DENNISON™ IDENTIFICATION CABLE TIES. These are used for bundling and identification purposes. Textured tab may be heat stamped or marked with special cable tie marking pens.

CUSTOM IMPRINTING
Mark ID ties, ID plates and cable ties; imprint serial numbers, company logos, sequential numbers, etc. Available in eight standard colors. Contact your local Avery Dennison distributor for details.

CABLE TIE MARKING PENS
Maximum legibility from extra-fine tip and jet-black ink, smear-proof and water-proof ink for writing on all nylon surfaces.



Fir Tree Ties are used to secure bundles in a fixed position to a surface via insertion into a hole. They require little force to insert and far greater force to extract, making them ideal to replace nuts, bolts and tape-on clips for permanent applications in automobiles, appliances, construction, etc.



Weld Stud Ties are similar to Fir Tree Ties but are designed to fit over threaded bolts that protrude from a surface.




In-Line Ties curved tie head ensures 360 degrees of contact around the bundle for a secure fit, while the low-profile head design and parallel tail entry offer improved aesthetics. All edges are rounded for added safety.

Meeting Customer Needs is our top priority here at the Fastener Division of Avery Dennison. Some customers have application needs that can't quite be met with standard cable ties, so we created the Custom Product Development Team.

- The Custom Product Development Team is successful for two reasons:
1. We sell solutions. Our engineers will work closely with you to develop a product that meets your specific need.
 2. Avery Dennison has expertise engineering cable ties that other companies can't match.

Challenge us with your most demanding application and we'll conduct a detailed review to identify a product to solve it. Fax us a descriptive sketch on the grid below to 978-383-2210.

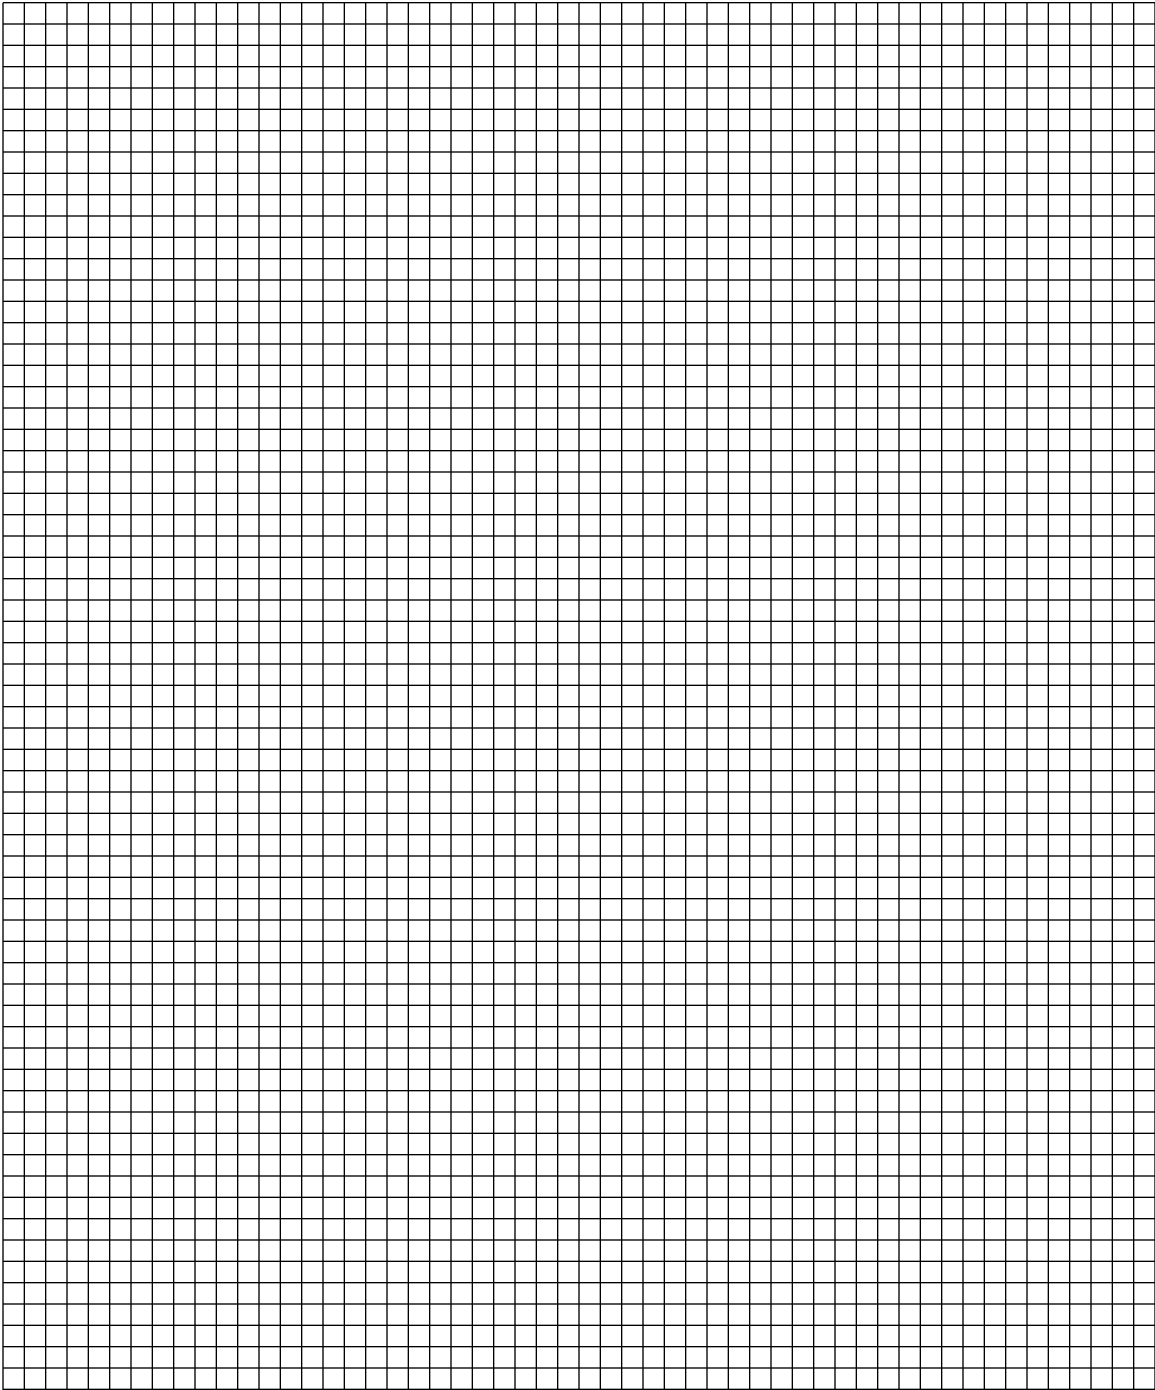

Military Specification
Avery Dennison™ Cable Tie Products meet the related military specifications where applicable.

The three components of this specification are:

- (1) **Design (MS-3367-X-Y).** This specification covers design and details minimum and maximum measurements (ex: length, width, thickness, head height), minimum loop tensile strength, material, and colors. So when your customer specifies an MS-3367-4-9, they are requesting a natural 4" miniature cable tie with an 18lb. tensile strength (Stock Item No. 08432).
 - (2) **Material ASTM-D4066.** This specification requires that cable ties be made of Nylon Type 6/6 resin and conforms to certain physical characteristics.
Type 1 – Natural Nylon Type 2 – Weather Resistant
 - (3) **Performance MIL-S-23190.** This specification details test procedures and acceptance criteria. This requires that ties meet a minimum loop tensile strength under adverse conditions such as temperature fluctuations, vibration, and chemical immersion. It also requires a melting point test to determine if the proper material is being used.
- Note:** If a customer asks for a part which meets a specification other than MS3367 (for conventional ties) or MS3368 (for specialty ties), then it is likely that they are looking for something other than cable ties.

THE MILITARY SPECIFICATION PART NUMBERING SYSTEM IS AS FOLLOWS:

MS 3367-X-Y									
"X" COMPONENT					"Y" COMPONENT				
#	BUNDLE DIAMETER MIN	MAX	STRENGTH	TENSILE CLASSIFICATION	#	COLOR			
-1	1/16"	1-3/4"	50lbs	Standard	-0	Black Weather Resistant			
-2	1/16"	4"	50lbs	Standard	-1	Brown			
-3	3/16"	3-1/2"	120lbs	Heavy Duty	-2	Red			
-4	1/16"	5/8"	18lbs	Miniature	-3	Orange			
-5	1/16"	1-1/4"	30lbs	Intermediate	-4	Yellow			
-6	3/16"	8"	120lbs	Heavy Duty	-5	Green			
-7	1/16"	3"	50lbs	Standard	-6	Blue			
					-7	Purple			
					-8	Gray			
					-9	Natural			

Underwriters Laboratory
This certification means that our parts meet certain performance characteristics within a specified temperature range as well as meeting UL94 V-2 flammability tests. UL94 V-2 means that when ignited, the nylon will extinguish itself when the flame is removed.



If a customer requires proof that a specific part adheres to these standards, we can provide the proper documentation. For UL and military specifications by part number, see our catalog.

THE CABLE TIE MARKET generally uses two standards: Military Specifications and Underwriters Laboratory (UL).

MILITARY SPECIFICATION	DESCRIPTION	PART NUMBER
MS-3367-1-0	7.5"/190.5mm BLACK WEATHER RESISTANT	08388, 08437
	7.5"/190.5mm BLACK HEAT STABILIZED (SUPER BAR-LOK®)	10003, 10005
MS-3367-1-9	7.5"/190.5mm NATURAL	08387, 08436
	7.5"/190.5mm NATURAL (SUPER BAR-LOK®)	10001, 10004
MS-3367-2-0	15"/381mm BLACK WEATHER RESISTANT	10037, 08428
	15"/381mm BLACK HEAT STABILIZED (SUPER BAR-LOK®)	10008, 10345
MS-3367-2-9	15"/381mm NATURAL	10036, 08427
	15"/381mm NATURAL (SUPER BAR-LOK®)	10006, 10344
MS-3367-3-0	14.5"/368.3mm BLACK WEATHER RESISTANT	10039, 08382
	21"/533.4mm BLACK WEATHER RESISTANT	10608
	24"/609.6mm BLACK WEATHER RESISTANT	10614
MS-3367-3-9	14.5"/368.3mm NATURAL	10038, 08378
	21"/533.4mm NATURAL	10606
	24"/609.6mm NATURAL	10612
MS-3367-4-0	4"/101.6mm BLACK WEATHER RESISTANT	08433, 08435
	8"/203.2mm BLACK WEATHER RESISTANT SLIM LINE	10327, 10330
	6"/152.4mm BLACK WEATHER RESISTANT SLIM LINE	10393, 10396
MS-3367-4-2	4"/101.6mm RED	08508
MS-3367-4-3	4"/101.6mm ORANGE	08582
MS-3367-4-4	4"/101.6mm YELLOW	08583
MS-3367-4-5	4"/101.6mm GREEN	08584
MS-3367-4-6	4"/101.6mm BLUE	08587
MS-3367-4-9	4"/101.6mm NATURAL	08432, 08434
	8"/203.2mm NATURAL SLIM LINE	10325, 10328
	6"/152.4mm NATURAL SLIM LINE	10391, 10394
MS-3367-5-0	5.5"/139.7mm BLACK WEATHER RESISTANT	08431, 08384
	8"/203.2mm BLACK WEATHER RESISTANT	08380, 08386
MS-3367-5-2	8"/203.2mm RED	08690
MS-3367-5-4	8"/203.2mm YELLOW	08782
MS-3367-5-5	8"/203.2mm GREEN	08664
MS-3367-5-6	8"/203.2mm BLUE	08671
MS-3367-5-9	5.5"/139.7mm NATURAL	08376, 08383
	8"/203.2mm NATURAL	08377, 08385
	11.5"/292.1mm NATURAL SLIM LINE	10985
MS-3367-6-0	28"/711.2mm BLACK WEATHER RESISTANT	10620
MS-3367-6-9	28"/711.2mm NATURAL	10618
MS-3367-7-0	11"/279.4mm BLACK WEATHER RESISTANT	08286, 08930
MS-3367-7-9	11"/279.4mm NATURAL	08600, 08859
MS-3368-1-9A	7.5"/190.5mm NATURAL ID	08413, 08419
MS-3368-5-9E	4"/101.6mm NATURAL ID	08412, 08417

ALL-STATES	ALL-STATES DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	EVERY DENNISON
ABM-4-18029	1.13," 50/BG	RUBBER ADH MNT	1"	100/BG	10030
ABMM-4-18039	.75," 50/BG	RUBBER ADH MNT	.75"	100/BG	10029
BT-5N-19060	1M/BG, 40LBS	S-TIE NAT RLSBL	5"/18LBS	5M/CS	08351
FRC-1-20109	50/BG	ADH FLAT CABLE CLIP		100/BG	08406
ID-150-18609	50/BG	ID PLATE	1.5" x 3/4"	100/BG	08457
NMP-BK-18579		BLACK MRKG PEN		12/CTN	08506
PM1-18209		PUSH-IN MNT	1/4" HOLE	100/BG	10056
RT-1-18509		HAND TOOL		1	08480
RT-3		BAR-LOK II TOOL		1	10257
RT-350-10050	3.75"	NAT	4"/18LBS	1M/BG	08432
RT-350-10051	3.75"	BLACK WR	4"/18LBS	1M/BG	08433
RT-350-10052	3.75"	BLACK HS	4"/18LBS	1M/BG	08404
RT-350-10058	3.75"	BLACK WR	4"/18LBS	100/BG	08435
RT-350-10059	3.75"	NAT	4"/18LBS	100/BG	08434
RT-360-10100		NAT SLIM LINE	6"/18LBS	1M/BG	10391
RT-360-10101		BLACK WR SLIM LINE	6"/18LBS	1M/BG	10393
RT-360-10102		BLACK HS SLIM LINE	6"/18LBS	1M/BG	10392
RT-360-10107		BLACK HS SLIM LINE	6"/18LBS	100/BG	10395
RT-360-10108		BLACK WR SLIM LINE	6"/18LBS	100/BG	10396
RT-360-10109		NAT SLIM LINE	6"/18LBS	100/BG	10394
RT-377-10150	7.75"	NAT SLIM LINE	8"/18LBS	1M/BG	10325
RT-377-10151	7.75"	BLACK WR SLIM LINE	8"/18LBS	1M/BG	10327
RT-377-10152	7.75"	BLACK HS SLIM LINE	8"/18LBS	1M/BG	10326
RT-377-10157	7.75"	BLACK HS SLIM LINE	8"/18LBS	100/BG	10329
RT-377-10158	7.75"	BLACK WR SLIM LINE	8"/18LBS	100/BG	10330
RT-377-10159	7.75"	NAT SLIM LINE	8"/18LBS	100/BG	10328
RT-508-10700	8.25"	NAT	8"/40LBS	1M/BG	08377
RT-508-10700-2	8.25"	RED	8"/40LBS	1M/BG	08690
RT-508-10700-3	8.25"	ORANGE	8"/40LBS	1M/BG	08780
RT-508-10700-4	8.25"	YELLOW	8"/40LBS	1M/BG	08782
RT-508-10700-5	8.25"	GREEN	8"/40LBS	1M/BG	08664
RT-508-10700-6	8.25"	BLUE	8"/40LBS	1M/BG	08671
RT-508-10700-7	8.25"	PURPLE	8"/40LBS	1M/BG	08680
RT-508-10701	8.25"	BLACK WR	8"/40LBS	1M/BG	08380
RT-508-10702	8.25"	BLACK HS	8"/40LBS	1M/BG	08401
RT-508-10708	8.25"	BLACK WR	8"/40LBS	100/BG	08386
RT-508-10709	8.25"	NAT	8"/40LBS	100/BG	08385
RT-511-10750	11.5," 500/BG	NAT (LADDER)	11"/40LBS	1M/BG	08471
RT-511-10752	11.5," 500/BG	BLACK HS (LADDER)	11"/40LBS	1M/BG	08473
RT-511-10757	11.5," 50/BG	BLACK HS (LADDER)	11"/40LBS	100/BG	08479
RT-511-10759	11.5," 50/BG	NAT (LADDER)	11"/40LBS	100/BG	08477
RT-514-10800	14.5," 500/BG	NAT SLIM LINE	15"/40LBS	1M/BG	10335
RT-514-10802	14.5," 500/BG	BLACK HS SLIM LINE	15"/40LBS	1M/BG	10336
RT-514-10807	14.5," 50/BG	BLACK HS SLIM LINE	15"/40LBS	100/BG	10339
RT-514-10809	14.5," 50/BG	NAT SLIM LINE	15"/40LBS	100/BG	10338
RT-550-10600	6"	NAT	5.5"/40LBS	1M/BG	08376
RT-550-10601	6"	BLACK WR	5.5"/40LBS	1M/BG	08431
RT-550-10602	6"	BLACK HS	5.5"/40LBS	1M/BG	08400
RT-550-10608	6"	BLACK WR	5.5"/40LBS	100/BG	08384
RT-550-10609	6"	NAT	5.5"/40LBS	100/BG	08383
RT-675-11050	7.25"	NAT	7.5"/50LBS	1M/BG	08387
	7.25"	NAT (SUPER BL)	7.5"/50LBS	1M/BG	10001
	7.25"	NAT (LADDER)	7"/40LBS	1M/BG	08470
RT-675-11051	7.25"	BLACK WR	7.5"/50LBS	1M/BG	08388
RT-675-11052	7.25"	BLACK HS	7.5"/50LBS	1M/BG	08402
	7.25"	BLACK HS (SUPER BL)	7.5"/50LBS	1M/BG	10008
	7.25"	BLACK HS (LADDER)	7"/40LBS	1M/BG	08472
RT-675-11057	7.25"	BLACK HS (SUPER BL)	7.5"/50LBS	100/BG	10005
	7.25"	BLACK HS (LADDER)	7.5"/40LBS	100/BG	08478
RT-675-11058	7.25"	BLACK WR	7.5"/50LBS	100/BG	08437
RT-675-11059	7.25"	NAT	7.5"/50LBS	100/BG	08436
	7.25"	NAT (SUPER BL)	7.5"/50LBS	100/BG	10004
	7.25"	NAT (LADDER)	7"/40LBS	100/BG	08476
		NAT	11"/50LBS	1M/BG	08600
RT-1100-11150	11.25," 500/BG	BLACK WR	11"/50LBS	1M/BG	08286
RT-1100-11151	11.25," 500/BG	BLACK HS	11"/50LBS	1M/BG	08056
RT-1100-11152	11.25," 500/BG	BLACK WR	11"/50LBS	100/BG	08930

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

ALL-STATES	ALL-STATES DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
RT-1100-11159	11.25," 50/BG	NAT	11"/50LBS	100/BG	08859
RT-1400-11250	14.25"	NAT	15"/50LBS	500/BG	10036
	14.25"	NAT (SUPER BL)	15"/50LBS	500/BG	10344
RT-1400-11251	14.25"	BLACK WR	15"/50LBS	500/BG	10037
RT-1400-11252	14.25"	BLACK HS	15"/50LBS	500/BG	10408
	14.25"	BLACK HS (SUPER BL)	15"/50LBS	500/BG	10345
RT-1400-11257	4.25," 50/BG	BLACK HS	15"/50LBS	100/BG	08416
	14.25," 50/BG	BLACK HS (SUPER BL)	15"/50LBS	100/BG	10008
RT-1400-11258	14.25," 50/BG	BLACK WR	15"/50LBS	100/BG	08428
RT-1400-11259	14.25," 50/BG	NAT	15"/50LBS	100/BG	08427
	14.25," 50/BG	NAT (SUPER BL)	15"/50LBS	100/BG	10006
RTDL-675-13700	7.75," 500/BG	NAT DBL HEAD	7.5"/50LBS	1M/BG	10424
RTDL-675-13701	7.75," 500/BG	BLACK WR DBL HEAD	7.5"/50LBS	1M/BG	10426
RTDL-675-13702	7.75," 500/BG	BLACK HS DBL HEAD	7.5"/50LBS	1M/BG	10425
RTDL-675-13707	7.75," 500/BG	BLACK HS DBL HEAD	7.5"/50LBS	100/BG	10428
RTDL-1100-13750	11.75," 500/BG	NAT DBL HEAD	11"/50LBS	1M/BG	10430
RTDL-1100-13751	11.75," 500/BG	BLACK WR DBL HEAD	11"/50LBS	1M/BG	10432
RTDL-1100-13752	11.75," 500/BG	BLACK HS DBL HEAD	11"/50LBS	1M/BG	10431
RTDL-1100-13757	11.75," 50/BG	BLACK HS DBL HEAD	11"/50LBS	100/BG	10434
RTH-1400-11900		NAT	14.5"/120LBS	100/BG	10038
RTH-1400-11901		BLACK WR	14.5"/120LBS	100/BG	10039
RTH-1400-11902		BLACK HS	14.5"/120LBS	100/BG	08403
RTH-1400-11908	25/BG	BLACK WR	14.5"/120LBS	50/BG	08382
RTH-1400-11909	25/BG	NAT	14.5"/120LBS	50/BG	08378
RTH-2100-12007	21.5," 25/BG	BLACK HS	21"/120LBS	50/BG	10607
RTH-2100-12008	21.5," 25/BG	BLACK WR	21"/120LBS	50/BG	10608
RTH-2100-12009	21.5," 25/BG	NAT	21"/120LBS	50/BG	10606
RTH-2800-12057	25/BG	BLACK HS	28"/120LBS	50/BG	10619
RTH-2800-12058	25/BG	BLACK WR	28"/120LBS	50/BG	10620
RTH-2800-12059	25/BG	NAT	28"/120LBS	50/BG	10618
RTH-3200-12308	10/BG	BLACK WR	33"/175LBS	25/BG	10050
RTH-3200-12309	10/BG	NAT	33"/175LBS	25/BG	10049
RTHM-1400-15200	15"	NAT S-MNT	14.5"/120LBS	100/BG	10035
RTHM-1400-15201	15"	BLACK WR S-MNT	14.5"/120LBS	100/BG	10040
RTHM-1400-15202	15"	BLACK HS S-MNT	14.5"/120LBS	100/BG	08441
RTHM-1400-15208	15," 25/BG	BLACK WR S-MNT	14.5"/120LBS	50/BG	08442
RTHM-1400-15209	15," 25/BG	NAT S-MNT	14.5"/120LBS	50/BG	08426
RTID-675-16000	500/BG	NAT ID	7.5"/50LBS	1M/BG	08413
RTID-675-16009	50/BG	NAT ID	7.5"/50LBS	100/BG	08419
RTIDI-350-16600	3.75"	NAT ID	4"/18LBS	1M/BG	08412
RTIDI-350-16609	3.75"	NAT ID	4"/18LBS	100/BG	08417
RTM-675-14950	8"	NAT S-MNT	7.5"/50LBS	1M/BG	08415
RTM-675-14951	8"	BLACK WR S-MNT	7.5"/50LBS	1M/BG	08444
RTM-675-14952	8"	BLACK HS S-MNT	7.5"/50LBS	1M/BG	08443
RTM-675-14958	8"	BLACK WR S-MNT	7.5"/50LBS	100/BG	08318
RTM-675-14959	8"	NAT S-MNT	7.5"/50LBS	100/BG	08484
RTM-1100-15000	12," 500/BG	NAT S-MNT	11"/50LBS	1M/BG	10350
RTM-1100-15001	12," 500/BG	BLACK WR S-MNT	11"/50LBS	1M/BG	10352
RTM-1100-15002	12," 500/BG	BLACK HS S-MNT	11"/50LBS	1M/BG	10351
RTM-1100-15008	12," 50/BG	BLACK WR S-MNT	11"/50LBS	100/BG	10354
RTM-1100-15009	12," 50/BG	NAT S-MNT	11"/50LBS	100/BG	10353
RTPM-675-15750	8," 500/BG	NAT P-MNT	7.5"/50LBS	1M/BG	08414
RTPM-675-15751	8," 500/BG	BLACK WR P-MNT	7.5"/50LBS	1M/BG	08446
RTPM-675-15752	8," 500/BG	BLACK HS P-MNT	7.5"/50LBS	1M/BG	08445
RTPM-675-15759	8," 50/BG	NAT P-MNT	7.5"/50LBS	100/BG	08439
RTPM-1100-15800	12," 500/BG	NAT P-MNT	11"/50LBS	1M/BG	10355
RTPM-1100-15801	12," 500/BG	BLACK WR P-MNT	11"/50LBS	1M/BG	10357
RTPM-1100-15802	12," 500/BG	BLACK HS P-MNT	11"/50LBS	1M/BG	10356
RTPM-1100-15808	12," 50/BG	BLACK WR P-MNT	11"/50LBS	100/BG	10359
RTPM-1100-15809	12," 50/BG	NAT P-MNT	11"/50LBS	100/BG	10358
SM-4-18119	50/BG	PLAIN BACKED MNT	1"	100/BG	08463
SM-10-18129	50/BG	CRADLE MNT	LG #10 SCR	100/BG	10046
SM-25-18139	50/BG	CRADLE MNT	LG 1/4" SCR	100/BG	10079
SM-68-18149	50/BG	CRADLE MNT	MED #8 SCR	100/BG	10045

CATAMOUNT	CATAMOUNT DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
FANY-812-9	500/BG	ADH FLAT CABLE CLIP		100/BG	08406
IDNY-1500-9	1M/BG	ID PLATE	1.5" x 3/4"	100/BG	08457
L-4-18-0-C		BLACK WR	4"/18LBS	100/BG	08435
L-4-18-0-M		BLACK WR	4"/18LBS	1M/BG	08433
L-4-18-9-C		NAT	4"/18LBS	100/BG	08434
L-4-18-9-M		NAT	4"/18LBS	1M/BG	08432
L-4-18ID-9-C		NAT ID	4"/18LBS	100/BG	08417
L-4-18ID-9-M		NAT ID	4"/18LBS	1M/BG	08412
L-5-30-0-C	5.6"/30LBS	BLACK WR	5.5"/40LBS	100/BG	08384
L-5-30-0-M	5.6"/30LBS	BLACK WR	5.5"/40LBS	1M/BG	08431
L-5-30-9-C	5.6"/30LBS	NAT	5.5"/40LBS	100/BG	08383
L-5-30-9-M	5.6"/30LBS	NAT	5.5"/40LBS	1M/BG	08376
L-5-30HS-0-M	5.6"/30LBS	BLACK HS	5.5"/40LBS	1M/BG	08400
L-7-50-0-C		BLACK WR	7.5"/50LBS	100/BG	08437
		BLACK WR	7.5"/50LBS	1M/BG	08388
L-7-50-9-C		NAT	7.5"/50LBS	100/BG	08436
		NAT (SUPER BL)	7.5"/50LBS	100/BG	10004
L-7-50-9-M		NAT (LADDER)	7"/40LBS	100/BG	08476
		NAT	7.5"/50LBS	1M/BG	08387
L-7-50HS-0-M		NAT (SUPER BL)	7.5"/50LBS	1M/BG	10001
		NAT (LADDER)	7"/40LBS	1M/BG	08470
L-7-50ID-9-C	7.88"	BLACK HS	7.5"/50LBS	1M/BG	08402
	7.88"	BLACK HS (SUPER BL)	7.5"/50LBS	1M/BG	10003
L-7-50ID-9-M		BLACK HS (LADDER)	7"/40LBS	1M/BG	08472
L-7-50MH-0-C		NAT ID	7.5"/50LBS	100/BG	08419
L-7-50MH-0-M		NAT ID	7.5"/50LBS	1M/BG	08413
L-7-50MH-9-C		BLACK WR S-MNT	7.5"/50LBS	100/BG	08318
L-7-50MH-9-M		BLACK WR S-MNT	7.5"/50LBS	1M/BG	08444
L-7-50MH-9-C		NAT S-MNT	7.5"/50LBS	100/BG	08484
L-7-50MH-9-M		NAT S-MNT	7.5"/50LBS	1M/BG	08415
L-8-18-0-C		BLACK WR SLIM LINE	8"/18LBS	100/BG	10330
L-8-18-0-M		BLACK WR SLIM LINE	8"/18LBS	1M/BG	10327
L-8-18-9-C		NAT SLIM LINE	8"/18LBS	100/BG	10328
L-8-18-9-M		NAT SLIM LINE	8"/18LBS	1M/BG	10325
L-8-40-0-C	8.5"	BLACK WR	8"/40LBS	100/BG	08386
L-8-40-0-M	8.5"	BLACK WR	8"/40LBS	1M/BG	08380
L-8-40-9-C	8.5"	NAT	8"/40LBS	100/BG	08385
L-8-40-9-M	8.5"	NAT	8"/40LBS	1M/BG	08377
L-8-40HS-0-M		BLACK HS	8"/40LBS	1M/BG	08401
		BLACK HS (LADDER)	7"/40LBS	1M/BG	08472
L-8-50R-0-C	8"	BLACK WR RLSBL	7.5"/50LBS	100/BG	10366
L-8-50R-0-D	8," 500/BG	BLACK WR RLSBL	7.5"/50LBS	1M/BG	10363
L-8-50R-9-C	8"	NAT RLSBL	7.5"/50LBS	100/BG	10364
L-8-50R-9-D	8," 500/BG	NAT RLSBL	7.5"/50LBS	1M/BG	10361
L-10-50R-0-C	10.5"	BLACK WR RLSBL	11"/50LBS	100/BG	10372
L-10-50R-0-D	10.5," 500/BG	BLACK WR RLSBL	11"/50LBS	1M/BG	10369
L-10-50R-9-C	10.5"	NAT RLSBL	11"/50LBS	100/BG	10370
L-10-50R-9-D	10.5," 500/BG	NAT RLSBL	11"/50LBS	1M/BG	10367
L-11-50-0-C	11.1"	BLACK WR	11"/50LBS	100/BG	08930
L-11-50-0-D	11.1," 500/BG	BLACK WR	11"/50LBS	1M/BG	08286
L-11-50-9-C	11.1"	NAT	11"/50LBS	100/BG	08859
L-11-50-9-D	11.1"	NAT (LADDER)	11"/40LBS	100/BG	08477
	11.1," 500/BG	NAT	11"/50LBS	1M/BG	08600
L-11-50HS-0-D	11.1," 500/BG	NAT (LADDER)	11"/40LBS	1M/BG	08471
	11.1," 500/BG	BLACK HS	11"/50LBS	1M/BG	08056
L-11-50MH-0-C	11.1," 500/BG	BLACK HS (LADDER)	11"/40LBS	1M/BG	08473
L-11-50MH-0-D	11.1"	BLACK WR S-MNT	11"/50LBS	100/BG	10354
L-11-50MH-0-D	11.1," 500/BG	BLACK WR S-MNT	11"/50LBS	1M/BG	10352
L-11-50MH-9-C	11.1"	NAT S-MNT	11"/50LBS	100/BG	10353
L-11-50MH-9-D	11.1," 500/BG	NAT S-MNT	11"/50LBS	1M/BG	10350
L-14-50-0-C	14.1"	BLACK WR	15"/50LBS	100/BG	08428
L-14-50-0-D	14.1"	BLACK WR	15"/50LBS	500/BG	10037
L-14-50-9-C	14.1"	NAT	15"/50LBS	100/BG	08427
L-14-50-9-D	14.1"	NAT (SUPER BL)	15"/50LBS	100/BG	10006
	14.1"	NAT	15"/50LBS	500/BG	10036
L-14-50HS-0-C	14.1"	NAT (SUPER BL)	15"/50LBS	500/BG	10344
	14.1"	BLACK HS	15"/50LBS	100/BG	08416
L-14-50HS-0-D	14.1"	BLACK HS (SUPER BL)	15"/50LBS	100/BG	10008
	14.1"	BLACK HS	15"/50LBS	500/BG	10408
L-14-120-0-C	14.1"	BLACK HS (SUPER BL)	15"/50LBS	500/BG	10345
	14.25"	BLACK WR	14.5"/120LBS	100/BG	10039
L-14-120-9-C	14.25"	NAT	14.5"/120LBS	100/BG	10038
L-14-120MH-0-C	14.85"	BLACK WR S-MNT	14.5"/120LBS	100/BG	10040
L-14-120MH-9-C	14.85"	NAT S-MNT	14.5"/120LBS	100/BG	10035
L-32-120-0-L	32"	BLACK WR	28"/120LBS	50/BG	10620

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

CATAMOUNT	CATAMOUNT DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
L-32-120-9-L	32"	NAT	28"/120LBS	50/BG	10618
L-34-175-0-L	34"	BLACK WR	33"/175LBS	25/BG	10050
L-34-175-9-L	34"	NAT	33"/175LBS	25/BG	10049
L-200		HAND TOOL		1	08480
L-300		HD TOOL		1	10257
L-400		BAR-LOK II TOOL		6	10624
LPM-9-M	1M/BG	LOW PROFILE MNT	#8 SCR	100/BG	08458
MKR-PEN-0		BLACK MRKG PEN		12/CTN	08506
MPNY-1000-9-D	500/BG	RUBBER ADH MNT	1"	100/BG	10030
	500/BG	ACRLYIC ADH MNT	1"	100/BG	08462
MPNY-750-9-D	500/BG	ACRYLIC ADH MNT	3/4"	100/BG	08461
	500/BG	RUBBER ADH MNT	3/4"	100/BG	10029
PMNY-245-9-D	500/BG	PUSH-IN MNT	1/4" HOL	100/BG	10056
SMNY-001NA-D	500/BG	CRADLE MNT	MED #8 SCR	100/BG	10045
SMNY-002NA-D	500/BG	CRADLE MNT	LG #10 SCR	100/BG	10046

PANDUIT	PANDUIT DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
ABM2S-A-C		RUBBER ADH MNT	1"	100/BG	10030
ABM2S-AT-C		ACRYLIC ADH MNT	1"	100/BG	08462
ABMM-A-C		RUBBER ADH MNT	3/4"	100/BG	10029
ABMM-AT-C		ACRYLIC ADH MNT	3/4"	100/BG	08461
AM2-C	1.24"	PLAIN BACKED MNT	1"	100/BG	08463
FCC-A-C8	PVC GR	ADH FLAT CABLE CLIP		100/BG	08406
GS2B,GS2BL		HAND TOOL		1	08480
GS4H		HD HAND TOOL		1	10639
LPMS-S8-C		LOW PROFILE MNT	#8 SCR	100/BG	08458
MP150-C		ID PLATE	1.5" x 3/4"	100/BG	08457
PLB2S-C30	7.6"	BLACK HS DBL HEAD	7.5"/50LBS	100/BG	10428
PLB2S-M	7.6"	NAT DBL HEAD	7.5"/50LBS	1M/BG	10424
PLB2S-M0	7.6"	BLACK WR DBL HEAD	7.5"/50LBS	1M/BG	10426
PLB2S-M30	7.6"	BLACK HS DBL HEAD	7.5"/50LBS	1M/BG	10425
PLB3S-C30	11.8"	BLACK HS DBL HEAD	11"/50LBS	100/BG	10434
PLB3S-M	11.8"	NAT DBL HEAD	11"/50LBS	1M/BG	10430
PLB3S-M0	11.8"	BLACK WR DBL HEAD	11"/50LBS	1M/BG	10432
PLB3S-M30	11.8"	BLACK HS DBL HEAD	11"/50LBS	1M/BG	10431
PLC2S-S10-C	7.9"	NAT S-MNT	7.5"/50LBS	100/BG	08484
PLC2S-S10-Co	7.9"	BLACK WR S-MNT	7.5"/50LBS	100/BG	08318
PLC2S-S10-M	7.9"	NAT S-MNT	7.5"/50LBS	1M/BG	08415
PLC2S-S10-M0	7.9"	BLACK WR S-MNT	7.5"/50LBS	1M/BG	08444
PLC2S-S10-M30	7.9"	BLACK HS S-MNT	7.5"/50LBS	1M/BG	08443
PLC3S-S10-C	12"	NAT S-MNT	11"/50LBS	100/BG	10353
PLC3S-S10-Co	12"	BLACK WR S-MNT	11"/50LBS	100/BG	10354
PLC3S-S10-M	12"	NAT S-MNT	11"/50LBS	1M/BG	10350
PLC3S-S10-M0	12"	BLACK WR S-MNT	11"/50LBS	1M/BG	10352
PLC3S-S10-M30	12"	BLACK HS S-MNT	11"/50LBS	1M/BG	10351
PLC4H-S25-D	15.2," 500/BG	NAT S-MNT	14.5"/120LBS	100/BG	10035
PLC4H-S25-DO	15.2," 500/BG	BLACK WR S-MNT	14.5"/120LBS	100/BG	10040
PLC4H-S25-D30	15.2," 500/BG	BLACK HS S-MNT	14.5"/120LBS	100/BG	08441
PLC4H-S25-L	15.2"	NAT S-MNT	14.5"/120LBS	50/BG	08426
PLC4H-S25-Lo	15.2"	BLACK WR S-MNT	14.5"/120LBS	50/BG	08442
PLM1M-C	3.9"	NAT ID	4"/18LBS	100/BG	08417
PLM1M-M	3.9"	NAT ID	4"/18LBS	1M/BG	08412
PLM1M-M10	3.9"	WH ID	4"/18LBS	1M/BG	10031
PLM2S-C	7.4"	NAT ID	7.5"/50LBS	100/BG	08419
PLM2S-M	7.4"	NAT ID	7.5"/50LBS	1M/BG	08413
PLP2S-C	7.9"	NAT P-MNT	7.5"/50LBS	100/BG	08439
PLP2S-C30	7.9"	BLACK HS P-MNT	7.5"/50LBS	1M/BG	08445
PLP2S-M	7.9"	NAT P-MNT	7.5"/50LBS	1M/BG	08414
PLP2S-M0	7.9"	BLACK WR P-MNT	7.5"/50LBS	1M/BG	08446
PLT.7M-C	3.1"	NAT	3.25"/18LBS	100/BG	08519
PLT.7M-CO	3.1"	BLACK WR	3.25"/18LBS	100/BG	08337
PLT.7M-M	3.1"	NAT	3.25"/18LBS	1M/BG	08429
PLT.7M-M0	3.1"	BLACK WR	3.25"/18LBS	1M/BG	08510
PLT.7M-M30	3.1"	BLACK HS	3.25"/18LBS	1M/BG	08509
PLT1M-C	3.9"	NAT	4"/18LBS	100/BG	08434
PLT1M-CO	3.9"	BLACK WR	4"/18LBS	100/BG	08435
PLT1M-M	3.9"	NAT	4"/18LBS	1M/BG	08432
PLT1M-M0	3.9"	BLACK WR	4"/18LBS	1M/BG	08433
PLT1M-M2	3.9"	RED	4"/18LBS	1M/BG	08508
PLT1M-M3	3.9"	ORANGE	4"/18LBS	1M/BG	08582
PLT1M-M4	3.9"	YELLOW	4"/18LBS	1M/BG	08583

PANDUIT	PANDUIT DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
PLT1M-M5	3.9"	GREEN	4"/18LBS	1M/BG	08584
PLT1M-M6	3.9"	BLUE	4"/18LBS	1M/BG	08587
PLT1M-M7	3.9"	PURPLE	4"/18LBS	1M/BG	08586
PLT1M-M30	3.9"	BLACK HS	4"/18LBS	1M/BG	08404
PLT1.5I-C	5.6"	NAT	5.5"/40LBS	100/BG	08383
PLT1.5I-CO	5.6"	BLACK WR	5.5"/40LBS	100/BG	08384
PLT1.5I-M	5.6"	NAT	5.5"/40LBS	1M/BG	08376
PLT1.5I-MO	5.6"	BLACK WR	5.5"/40LBS	1M/BG	08431
PLT1.5I-M30	5.6"	BLACK HS	5.5"/40LBS	1M/BG	08400
PLT1.5M-C	5.6"	NAT SLIM LINE	6"/18LBS	100/BG	10394
PLT1.5M-Co	5.6"	BLACK WR SLIM LINE	6"/18LBS	100/BG	10396
PLT1.5M-C30	5.6"	BLACK HS SLIM LINE	6"/18LBS	100/BG	10395
PLT1.5M-M	5.6"	NAT SLIM LINE	6"/18LBS	1M/BG	10391
PLT1.5M-Mo	5.6"	BLACK WR SLIM LINE	6"/18LBS	1M/BG	10393
PLT1.5M-M30	5.6"	BLACK HS SLIM LINE	6"/18LBS	100/BG	10392
PLT2I-C		NAT	8"/40LBS	100/BG	08385
		NAT (LADDER)	7"/40LBS	100/BG	08476
PLT2I-CO		BLACK WR	8"/40LBS	100/BG	08386
PLT2I-C30	8"	BLACK HS (LADDER)	7"/40LBS	100/BG	08478
PLT2I-M		NAT	8"/40LBS	1M/BG	08377
		NAT (LADDER)	7"/40LBS	1M/BG	08470
PLT2I-M2		RED	8"/40LBS	1M/BG	08690
PLT2I-M3		ORANGE	8"/40LBS	1M/BG	08780
PLT2I-M4		YELLOW	8"/40LBS	1M/BG	08782
PLT2I-M5		GREEN	8"/40LBS	1M/BG	08664
PLT2I-M6		BLUE	8"/40LBS	1M/BG	08671
PLT2I-M7		PURPLE	8"/40LBS	1M/BG	08680
PLT2I-M30		BLACK HS	8"/40LBS	1M/BG	08401
		BLACK HS (LADDER)	7"/40LBS	1M/BG	08472
PLT2I-M0		BLACK WR	8"/40LBS	1M/BG	08380
PLT2M-C		NAT SLIM LINE	8"/18LBS	100/BG	10328
PLT2M-Co		BLACK WR SLIM LINE	8"/18LBS	100/BG	10330
PLT2M-C30		BLACK HS SLIM LINE	8"/18LBS	100/BG	10329
PLT2M-M		NAT SLIM LINE	8"/18LBS	1M/BG	10325
PLT2M-Mo		BLACK WR SLIM LINE	8"/18LBS	1M/BG	10327
PLT2M-M30		BLACK HS SLIM LINE	8"/18LBS	1M/BG	10326
PLT2S-C	7.4"	NAT	7.5"/50LBS	100/BG	08436
	7.4"	NAT (SUPER BL)	7.5"/50LBS	100/BG	10004
	7.4"	NAT (LADDER)	7"/40LBS	100/BG	08476
PLT2S-CO	7.4"	BLACK WR	7.5"/50LBS	100/BG	08437
PLT2S-C30	7.4"	BLACK HS (SUPER BL)	7.5"/50LBS	100/BG	10005
	7.4"	BLACK HS (LADDER)	7"/40LBS	100/BG	08478
PLT2S-M0	7.4"	BLACK WR	7.5"/50LBS	1M/BG	08388
PLT2S-M	7.4"	NAT	7.5"/50LBS	1M/BG	08387
	7.4"	NAT (SUPER BL)	7.5"/50LBS	1M/BG	10001
	7.4"	NAT (LADDER)	7"/40LBS	1M/BG	08470
PLT2S-M30	7.4"	BLACK HS	7.5"/50LBS	1M/BG	08402
	7.4"	BLACK HS (SUPER BL)	7.5"/50LBS	1M/BG	10003
	7.4"	BLACK HS (LADDER)	7"/40LBS	1M/BG	08472
PLT3I-C	11.4"	NAT (LADDER)	11"/40LBS	100/BG	08477
PLT3I-C30	11.4"	BLACK HS (LADDER)	11"/40LBS	100/BG	08479
PLT3I-M	11.4"	NAT (LADDER)	11"/40LBS	1M/BG	08471
PLT3I-M30	11.4"	BLACK HS (LADDER)	11"/40LBS	1M/BG	08473
PLT3S-C	11.5"	NAT	11"/50LBS	100/BG	08859
PLT3S-CO	11.5"	BLACK WR	11"/50LBS	100/BG	08930
PLT3S-M0	11.5"	BLACK WR	11"/50LBS	1M/BG	08286
PLT3S-M	11.5"	NAT	11"/50LBS	1M/BG	08600
PLT3S-M30	11.5"	BLACK HS	11"/50LBS	1M/BG	08056
PLT4H-L		NAT	14.5"/120LBS	50/BG	08378
PLT4H-LO		BLACK WR	14.5"/120LBS	50/BG	08382
PLT4H-L30	50/BG	BLACK HS	14.5"/120LBS	100/BG	08403
PLT4I-C	14.6"	NAT SLIM LINE	15"/40LBS	100/BG	10338
PLT4I-M	14.6"	NAT SLIM LINE	15"/40LBS	1M/BG	10335
PLT4S-C	14.5"	NAT	15"/50LBS	100/BG	08427
	14.5"	NAT (SUPER BL)	15"/50LBS	100/BG	10006
PLT4S-CO	14.5"	BLACK WR	15"/50LBS	100/BG	08428
PLT4S-C30	14.5"	BLACK HS	15"/50LBS	100/BG	08416
	14.5"	BLACK HS (SUPER BL)	15"/50LBS	100/BG	10008
PLT4S-M	14.5," 1M/BG	NAT	15"/50LBS	500/BG	10036
	14.5," 1M/BG	NAT (SUPER BL)	15"/50LBS	500/BG	10344
PLT4S-M0	14.5," 1M/BG	BLACK WR	15"/50LBS	500/BG	10037
PLT4S-M30	14.5," 1M/BG	BLACK HS	15"/50LBS	500/BG	10408
	14.5," 1M/BG	BLACK HS (SUPER BL)	15"/50LBS	500/BG	10345
PLT7LH-L	24.7"	NAT	24"/120LBS	50/BG	10612

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

PANDUIT	PANDUIT DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
PLT7LH-LO	24.7"	BLACK WR	24"/120LBS	50/BG	10614
PLT7LH-L30	24.7"	BLACK HS	24"/120LBS	50/BG	10613
PLT8H-L	30.6," 50/BG	NAT	33"/175LBS	25/BG	10049
PLT8H-LO	30.6," 50/BG	BLACK WR	33"/175LBS	25/BG	10050
PLT8LH-L	27.6"	NAT	28"/120LBS	50/BG	10618
PLT8LH-LO	27.6"	BLACK WR	28"/120LBS	50/BG	10620
PLT8LH-L30	27.6"	BLACK HS	28"/120LBS	50/BG	10619
PLWP2S-M	7.8"	NAT WNG P-MNT	7.5"/50LBS	1M/BG	10580
PLWP2S-Mo	7.8"	BLACK WR WNG P-MNT	7.5"/50LBS	1M/BG	10582
PLWP2S-M30	7.8"	BLACK HS WNG P-MNT	7.5"/50LBS	1M/BG	10581
PM2H25-C		PUSH-IN MNT	1/4" HOLE	100/BG	10056
PPTS		PNEUMATIC HAND TOOL		1	08381
PRT2S-C	7.4"	NAT RLSBL	7.5"/50LBS	100/BG	10364
PRT2S-Co	7.4"	BLACK WR RLSBL	7.5"/50LBS	100/BG	10366
PRT2S-C30	7.4"	BLACK HS RLSBL	7.5"/50LBS	100/BG	10365
PRT2S-M	7.4"	NAT RLSBL	7.5"/50LBS	1M/BG	10361
PRT2S-MO	7.4"	BLACK WR RLSBL	7.5"/50LBS	1M/BG	10363
PRT2S-M30	7.4"	BLACK HS RLSBL	7.5"/50LBS	1M/BG	10362
PRT3S-C	11.5"	NAT RLSBL	11"/50LBS	100/BG	10370
PRT3S-Co	11.5"	BLACK WR RLSBL	11"/50LBS	100/BG	10372
PRT3S-C30	11.5"	BLACK HS	11"/50LBS	100/BG	10371
PRT3S-M	11.5"	NAT RLSBL	11"/50LBS	1M/BG	10367
PRT3S-Mo	11.5"	BLACK WR RLSBL	11"/50LBS	1M/BG	10369
PRT3S-M30	11.5"	BLACK HS RLSBL	11"/50LBS	1M/BG	10368
PX-o		BLACK MRKG PEN		12/CTN	08506
STHV		HD TOOL		1	10257
STS		BAR-LOK II TOOL		1	10624
TA1S8-C		TIE ANCHOR BASE	#8 SCR	100/BG	10027
TAS10-C		TIE ANCHOR BASE	#10 SCR	100/BG	10028
TM1S4-C		CRADLE MNT	SM #4 SCR	100/BG	10044
TM3S10-C		CRADLE MNT	LG #10 SCR	100/BG	10046
TM3S25-C		CRADLE MNT HS	LG 1/4" SCR	100/BG	10079
TM3S8-C		CRADLE MNT	MED #8 SCR	100/BG	10045

T&B	T&B DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
TC102		LOW PROFILE MNT	#8 SCR	100/BG	08458
TC124	1M/BG	ID PLATE	1.5" x 3/4"	100/BG	08457
TC140	500/BG	CRADLE MNT	SM #4 SCR	100/BG	10044
TC344A		RUBBER ADH MNT	3/4"	100/BG	10029
		ACRYLIC ADH MNT	3/4"	100/BG	08461
TC345A		RUBBER ADH MNT	1"	100/BG	10030
		ACRYLIC ADH MNT	1"	100/BG	08462
TC347		PLAIN BACKED MNT	1"	100/BG	08463
TC5142		CRADLE MNT	LG #10 SCR	100/BG	10046
TC5823		PUSH-IN MNT	1/4" HOLE	100/BG	10056
TC5828		TIE ANCHOR BASE	#8 SCR	100/BG	10027
TR227		PNEUMATIC HAND TOOL		1	08381
TY23M	3.6"	NAT	4"/18LBS	1M/BG	08432
TY23MX	3.6"	BLACK WR	4"/18LBS	1M/BG	08433
TY24M	30LBS	NAT	5.5"/40LBS	1M/BG	08376
TY24MX	30LBS	BLACK WR	5.5"/40LBS	1M/BG	08431
TY25M	7.3"	NAT	7.5"/50LBS	1M/BG	08387
	7.3"	NAT (SUPER BL)	7.5"/50LBS	1M/BG	10001
	7.3"	NAT (LADDER)	7"/40LBS	1M/BG	08470
TY25MX	7.3"	BLACK WR	7.5"/50LBS	1M/BG	08388
TY26M	11.1"	NAT (LADDER)	11"/40LBS	1M/BG	08471
	11.1"	NAT	11"/50LBS	1M/BG	08600
TY27M	13.4," 500/BG	NAT	14.5"/120LBS	100/BG	10038
TY27MX	13.4," 500/BG	BLACK WR	14.5"/120LBS	100/BG	10039
TY28M	14.2," 1M/BG	NAT	15"/50LBS	500/BG	10036
	14.2," 1M/BG	NAT (SUPER BL)	15"/50LBS	500/BG	10344
TY28MX	14.2," 1M/BG	BLACK WR	15"/50LBS	500/BG	10037
TY35M	7.8"	NAT S-MNT	7.5"/50LBS	1M/BG	08415
TY35MX	7.8"	BLACK WR S-MNT	7.5"/50LBS	1M/BG	08444
TY37M	13.9," 500/BG	NAT S-MNT	14.5"/120LBS	100/BG	10035
TY37MX	13.9," 500/BG	BLACK WR S-MNT	14.5"/120LBS	100/BG	10040
TY38M	7.8"	NAT P-MNT	7.5"/50LBS	1M/BG	08414
TY46M		NAT ID	7.5"/50LBS	1M/BG	08413
TY53M		NAT ID	4"/18LBS	1M/BG	08412
TY232M		NAT SLIM LINE	8"/18LBS	1M/BG	10325
TY232MX		BLACK WR SLIM LINE	8"/18LBS	1M/BG	10327

T&B	T&B DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
TY242M	8.2"	NAT	8"/40LBS	1M/BG	08377
TY242MX	8.2"	BLACK WR	8"/40LBS	1M/BG	08380
TY244M	14.5"	NAT SLIM LINE	15"/40LBS	1M/BG	10335
TY244MX	14.5"	BLACK HS SLIM LINE	15"/40LBS	1M/BG	10336
TY253M	11.4"	NAT	11"/50LBS	1M/BG	08600
	11.4"	NAT (LADDER)	11"/40LBS	1M/BG	08471
TY253MX	11.4"	BLACK WR	11"/50LBS	1M/BG	08286
TY523M	3.6"	NAT	4"/18LBS	100/BG	08434
TY523MX	3.6"	BLACK WR	4"/18LBS	100/BG	08435
TY524M	30LBS	NAT	5.5"/40LBS	100/BG	08383
TY524MX	30LBS	BLACK WR	5.5"/40LBS	100/BG	08384
TY525M	7.3"	NAT	7.5"/50LBS	100/BG	08436
	7.3"	NAT (SUPER BL)	7.5"/50LBS	100/BG	10004
	7.3"	NAT (LADDER)	7"/40LBS	100/BG	08476
TY525MX	7.3"	BLACK WR	7.5"/50LBS	100/BG	08437
TY526M	11.1"	NAT (LADDER)	11"/40LBS	100/BG	08477
TY527M	13.4"	NAT	14.5"/120LBS	50/BG	08378
TY527MX	13.4"	BLACK WR	14.5"/120LBS	50/BG	08382
TY528M		NAT	15"/50LBS	100/BG	08427
		NAT (SUPER BL)	15"/50LBS	100/BG	10006
TY528MX	14.2"	BLACK WR	15"/50LBS	100/BG	08428
TY529M	30"	NAT	28"/120LBS	50/BG	10618
TY529MX	30"	BLACK WR	28"/120LBS	50/BG	10620
TY535M	7.8"	NAT S-MNT	7.5"/50LBS	100/BG	08484
TY535MX	7.8"	BLACK WR S-MNT	7.5"/50LBS	100/BG	08318
TY537M	13.9"	NAT S-MNT	14.5"/120LBS	50/BG	08426
TY537MX	13.9"	BLACK WR S-MNT	14.5"/120LBS	50/BG	08442
TY538M	7.8"	NAT P-MNT	7.5"/50LBS	100/BG	08439
TY546M	7.25"	NAT ID	7.5"/50LBS	100/BG	08419
TY553M		NAT ID	4"/18LBS	100/BG	08417
TY5232M		NAT SLIM LINE	8"/18LBS	100/BG	10328
TY5232MX		BLACK WR SLIM LINE	8"/18LBS	100/BG	10330
TY5242M	8.2"	NAT	8"/40LBS	100/BG	08385
TY5242MX	8.2"	BLACK WR	8"/40LBS	100/BG	08386
TY5244M	14.5"	NAT SLIM LINE	15"/40LBS	100/BG	10338
TY5244MX	14.5"	BLACK HS SLIM LINE	15"/40LBS	100/BG	10339
TY5253M	11.4"	NAT	11"/50LBS	100/BG	08859
	11.4"	NAT (LADDER)	11"/40LBS	100/BG	08477
TY5253MX	11.4"	BLACK WR	11"/50LBS	100/BG	08930
TY5277M	24.3"	NAT	24"/120LBS	50/BG	10612
TY5277MX	24.3"	BLACK WR	24"/120LBS	50/BG	10614
TY52315M	7"	NAT SLIM LINE	6"/18LBS	100/BG	10394
TY52315MX	7"	BLACK WR SLIM LINE	6"/18LBS	100/BG	10396
TYB2315M	7"	NAT SLIM LINE	6"/18LBS	1M/BG	10391
TYB2315MX	7"	BLACK WR SLIM LINE	6"/18LBS	1M/BG	10393
TYH24M	30LBS	BLACK HS	5.5"/40LBS	1M/BG	08400
TYH25M	7.3"	BLACK HS	7.5"/50LBS	1M/BG	08402
	7.3"	BLACK HS (SUPER BL)	7.5"/50LBS	1M/BG	10003
	7.3"	BLACK HS (LADDER)	7"/40LBS	1M/BG	08472
TYH27M	1M/BG	BLACK HS	14.5"/120LBS	100/BG	08403
TYH28M	14.2," 1M/BG	BLACK HS	15"/50LBS	500/BG	10408
	14.2," 1M/BG	BLACK HS (SUPER BL)	15"/50LBS	500/BG	10345
TYR505	500/BG	NAT RLSBL	7.5"/50LBS	1M/BG	10361
TYR508	500/BG	NAT RLSBL	11"/50LBS	1M/BG	10367
WT1,WT2		BAR-LOK II TOOL		1	10624
WT163M-1	1/CTN	BLACK MRKG PEN		12/CTN	08506
WT193A		HAND TOOL		1	08480
WT197, WT199		EXTRA HD TOOL		1	10257

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

TYTON	TYTON DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
13-0100-C		ADH FLAT CABLE CLIP		100/BG	08406
CTAM-1-C		TIE ANCHOR BASE	#8 SCR	100/BG	10027
CTAM-2-C		TIE ANCHOR BASE	#10 SCR	100/BG	10028
CTM-O-C	#6 SCR	CRADLE MNT	SM #4 SCR	100/BG	10044
CTM-1-C		CRADLE MNT	MED #8 SCR	100/BG	10045
CTM-3-C		CRADLE MNT	LG #10 SCR	100/BG	10046
CTM-4-C	WH	CRADLE MNT HS	LG 1/4 in SCR	100/BG	10079
IT18R	200/BG	NAT ID	4" /18LBS	1M/BG	08412
IT18R-10	200/BG	WHITE ID	4" /18LBS	1M/BG	10031
IT18R-C		NAT ID	4" /18LBS	100/BG	08417
IT50R-C	8"	NAT ID	7.5" /50LBS	100/BG	08419
IT50R-M	8"	NAT ID	7.5" /50LBS	1M/BG	08413
MB-2-C		LOW PROFILE MNT	#8 SCR	100/BG	08458
MB-3A-C		RUBBER ADH MNT	3/4"	100/BG	10029
MB-4-C	#8 SCR	PLAIN BACKED MNT	#6 SCR 1"	100/BG	08463
MB-4A-C		RUBBER ADH MNT	1"	100/BG	10030
MK3PN		PNEUMATIC HAND TOOL		1	08381
MK5, MK7, MK7HT		HAND TOOL		1	08480
MK6		HD HAND TOOL		1	10639
RT50L	10," 200/BG	NAT RLSBL	11" /50LBS	1M/BG	10367
RT50L-o	10," 200/BG	BLACK WR RLSBL	11" /50LBS	1M/BG	10369
RT50L-o-C	10"	BLACK WR RLSBL	11" /50LBS	100/BG	10372
RT50L-C	10"	NAT RLSBL	11" /50LBS	100/BG	10370
RT50L-HSO	10"	BLACK HS RLSBL	11" /50LBS	1M/BG	10368
RT50L-HSO-C	10"	BLACK HS RLSBL	11" /50LBS	100/BG	10371
RT50S-o-M	6.5"	BLACK WR RLSBL	7.5" /50LBS	1M/BG	10363
RT50S-o-C	6.5"	BLACK WR RLSBL	7.5" /50LBS	100/BG	10366
RT50S-C	6.5"	NAT RLSBL	7.5" /50LBS	100/BG	10364
RT50S-HSO	6.5"	BLACK HS RLSBL	7.5" /50LBS	1M/BG	10362
RT50S-HSO-C	6.5"	BLACK HS RLSBL	7.5" /50LBS	100/BG	10365
RT50S-M	6.5"	NAT RLSBL	7.5" /50LBS	1M/BG	10361
T18I	5-75"	NAT SLIM LINE	6" /18LBS	1M/BG	10391
T18I-o	5-75"	BLACK WR SLIM LINE	6" /18LBS	1M/BG	10393
T18I-o-C	5-75"	BLACK WR SLIM LINE	6" /18LBS	100/BG	10396
T18I-C	5-75"	NAT SLIM LINE	6" /18LBS	100/BG	10394
T18I-HSO	5-75"	BLACK HS SLIM LINE	6" /18LBS	1M/BG	10392
T18I-HSO-C	5-75"	BLACK HS SLIM LINE	6" /18LBS	100/BG	10395
T18L		NAT SLIM LINE	8" /18LBS	1M/BG	10325
T18L-o		BLACK WR SLIM LINE	8" /18LBS	1M/BG	10327
T18L-o-C		BLACK WR SLIM LINE	8" /18LBS	100/BG	10330
T18L-C		NAT SLIM LINE	8" /18LBS	100/BG	10328
T18L-HSO		BLACK HS SLIM LINE	8" /18LBS	1M/BG	10326
T18L-HSO-C		BLACK HS SLIM LINE	8" /18LBS	100/BG	10329
T18R		NAT	4" /18LBS	1M/BG	08432
T18R-o		BLACK WR	4" /18LBS	1M/BG	08433
T18R-o-C		BLACK WR	4" /18LBS	100/BG	08435
T18R-2		RED	4" /18LBS	1M/BG	08508
T18R-3		ORANGE	4" /18LBS	1M/BG	08582
T18R-4		YELLOW	4" /18LBS	1M/BG	08583
T18R-5		GREEN	4" /18LBS	1M/BG	08584
T18R-6		BLUE	4" /18LBS	1M/BG	08587
T18R-7		PURPLE	4" /18LBS	1M/BG	08586
T18R-C		NAT	4" /18LBS	100/BG	08434
T18R-HSO		BLACK HS	4" /18LBS	1M/BG	08404
T18S	3-37"	NAT	3.25" /18LBS	1M/BG	08429
T18S-o	3-37"	BLACK WR	3.25" /18LBS	1M/BG	08510
T18S-HSO	3-37"	BLACK HS	3.25" /18LBS	1M/BG	08509
T30R	6," 30LBS	NAT	5.5" /40LBS	1M/BG	08376
T30R-o	6," 30LBS	BLACK WR	5.5" /40LBS	1M/BG	08431
T30R-o-C	6," 30LBS	BLACK WR	5.5" /40LBS	100/BG	08384
T30R-C	6," 30LBS	NAT	5.5" /40LBS	100/BG	08383
T30R-HSO	6," 30LBS	BLACK HS	5.5" /40LBS	1M/BG	08400
T40I	11.5"	NAT (LADDER)	11" /40LBS	1M/BG	08471
T40I-C	11.5"	NAT (LADDER)	11" /40LBS	100/BG	08477
T40I-HSO	11.5"	BLACK HS (LADDER)	11" /40LBS	1M/BG	08473
T40I-HSo-C	11.5"	BLACK HS (LADDER)	11" /40LBS	100/BG	08479
T40L	14.5"	NAT SLIM LINE	15" /40LBS	1M/BG	10335
T40L-C	14.5"	NAT SLIM LINE	15" /40LBS	100/BG	10338
T40L-HSO	14.5"	BLACK HS SLIM LINE	15" /40LBS	1M/BG	10336
T40L-HSO-C	14.5"	BLACK HS SLIM LINE	15" /40LBS	100/BG	10339
T40R	8.5"	NAT	8" /40LBS	1M/BG	08377
T40R-o	8.5"	BLACK WR	8" /40LBS	1M/BG	08380
T40R-o-C	8.5"	BLACK WR	8" /40LBS	100/BG	08386
T40R-2	8.5"	RED	8" /40LBS	1M/BG	08690
T40R-3	8.5"	ORANGE	8" /40LBS	1M/BG	08780

TYTON	TYTON DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	AVERY DENNISON
T40R-4	8.5"	YELLOW	8" /40LBS	1M/BG	08782
T40R-5	8.5"	GREEN	8" /40LBS	1M/BG	08664
T40R-6	8.5"	BLUE	8" /40LBS	1M/BG	08671
T40R-7	8.5"	PURPLE	8" /40LBS	1M/BG	08680
T40R-C	8.5"	NAT	8" /40LBS	100/BG	08385
T40R-HSo	8.5"	BLACK HS	8" /40LBS	1M/BG	08401
T50I	11.75"	NAT	11" /50LBS	1M/BG	08600
T50I-o	11.75"	BLACK WR	11" /50LBS	1M/BG	08286
T50I-o-C	11.75"	BLACK WR	11" /50LBS	100/BG	08930
T50I-C	11.75"	NAT	11" /50LBS	100/BG	08859
T50I-HSO	11.75"	BLACK HS	11" /50LBS	1M/BG	08056
T50IDH	12"	NAT DBL HEAD	11" /50LBS	1M/BG	10430
T50IDH-o	12"	BLACK WR DBL HEAD	11" /50LBS	1M/BG	10432
T50IDH-HSO	12"	BLACK HS DBL HEAD	11" /50LBS	1M/BG	10431
T50IDH-HSO-C	12"	BLACK HS DBL HEAD	11" /50LBS	100/BG	10434
T50L	15.5," 1M/BG	NAT	15" /50LBS	500/BG	10036
	15.5," 1M/BG	NAT (SUPER BL)	15" /50LBS	500/BG	10344
T50L-o	15.5," 1M/BG	BLACK WR	15" /50LBS	500/BG	10037
T50L-o-C	15.5," 100/BG	BLACK WR	15" /50LBS	100/BG	08428
T50L-C	15.5," 100/BG	NAT	15" /50LBS	100/BG	08427
	15.5," 100/BG	NAT (SUPER BL)	15" /50LBS	100/BG	10006
T50L-HSO	15.5," 1M/BG	BLACK HS	15" /50LBS	500/BG	10408
	15.5," 1M/BG	BLACK HS (SUPER BL)	15" /50LBS	500/BG	10345
T50L-HSO-C	15.5," 100/BG	BLACK HS	15" /50LBS	100/BG	08416
	15.5," 100/BG	BLACK HS (SUPER BL)	15" /50LBS	100/BG	10008
T50MR	8.5"	NAT S-MNT	7.5" /50LBS	1M/BG	08415
T50MR-o	8.5"	BLACK WR S-MNT	7.5" /50LBS	1M/BG	08444
T50MR-o-C	8.5"	BLACK WR S-MNT	7.5" /50LBS	100/BG	08318
T50MR-C	8.5"	NAT S-MNT	7.5" /50LBS	100/BG	08484
T50MR-HSO	8.5"	BLACK HS S-MNT	7.5" /50LBS	1M/BG	08443
T50R	8," 50LBS	NAT	7.5" /50LBS	1M/BG	08387
	8," 50LBS	NAT (SUPER BL)	7.5" /50LBS	1M/BG	10001
	8," 50LBS	NAT (LADDER)	7" /40LBS	1M/BG	08470
T50R-o	8," 50LBS	BLACK WR	7" /40LBS	1M/BG	08388
T50R-o-C	8," 50LBS	BLACK WR	7.5" /50LBS	100/BG	08437
T50R-C	8," 50LBS	NAT	7.5" /50LBS	100/BG	08436
	8," 50LBS	NAT (LADDER)	7" /40LBS	100/BG	08476
	8," 50LBS	NAT (SUPER BL)	7.5" /50LBS	100/BG	10004
T50R-HSO	8," 50LBS	BLACK HS	7.5" /50LBS	1M/BG	08402
	8," 50LBS	BLACK HS (LADDER)	7" /40LBS	1M/BG	08472
	8," 50LBS	BLACK HS (SUPER BL)	7.5" /50LBS	1M/BG	10003
T50R-HSO-C		BLACK HS (LADDER)	7" 40LBS	100/BG	08478
		BLACK HS (SUPER BL)	7.5" 50LBS	100/BG	10005
T50RDH	8.25"	NAT DBL HEAD	7.5" /50LBS	1M/BG	10424
T50RDH-HSO	8.25"	BLACK HS DBL HEAD	7.5" /50LBS	1M/BG	10425
T50RDH-HSO-C	8.25"	BLACK HS DBL HEAD	7.5" /50LBS	100/BG	10428
T50RDH-o	8.25"	BLACK WR DBL HEAD	7.5" /50LBS	1M/BG	10426
T50RDH-O-C	8.25"	BLACK WR DBL HEAD	7.5" /50LBS	100/BG	10429
T50R/SF	8.5"	NAT P-MNT	7.5" /50LBS	1M/BG	08414
T50R/SF-o	8.5"	BLACK WR P-MNT	7.5" /50LBS	1M/BG	08446
T50R/SF-C	8.5"	NAT P-MNT	7.5" /50LBS	100/BG	08439
T50R/SF-HSO	8.5"	BLACK HS P-MNT	7.5" /50LBS	1M/BG	08445
T120L-o	29.75"	BLACK WR	28" /120LBS	50/BG	10620
T120L-HSO	29.75"	BLACK HS	28" /120LBS	50/BG	10619
T120L-K	29.75"	NAT	28" /120LBS	50/BG	10618
T120MR	16.25"	NAT S-MNT	14.5" /120LBS	50/BG	08426
T120MR-o	16.25"	BLACK WR S-MNT	14.5" /120LBS	50/BG	08442
T120MR-o-C	16.25"	BLACK WR S-MNT	14.5" /120LBS	100/BG	10040
T120MR-C	16.25"	NAT S-MNT	14.5" /120LBS	100/BG	10035
T120MR-HSO-C	16.25"	BLACK HS S-MNT	14.5" /120LBS	100/BG	08441
T120R	15.25"	NAT	14.5" /120LBS	50/BG	08378
T120R-o	15.25"	BLACK WR	14.5" /120LBS	50/BG	08382
T120R-o-C	15.25," 500/BG	BLACK WR	14.5" /120LBS	100/BG	10039
T120R-C	15.25," 500/BG	NAT	14.5" /120LBS	100/BG	10038
T120R-HSO-C	15.25," 500/BG	BLACK HS	14.5" /120LBS	100/BG	08403
T150		HD TOOL		1	10257
T150L-o-Q	32"	BLACK WR	33" /175LBS	25/BG	10050
T150L-Q	32"	NAT	33" /175LBS	25/BG	10049
T150M	175 LBS, 25/BG	NAT	21" /20LBS	50/BG	10606
T150M-o	175 LBS, 25/BG	BLACK WR	21" /20LBS	50/BG	10608
T150M-HSO	175 LBS, 25/BG	BLACK HS	21" /20LBS	50/BG	10607
TM1/SF1-C		PUSH-IN MNT	1/4" HOLE	100/BG	10056
TWT-1		BAR-LOK II TOOL		6	10624

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

THESE CHARTS WILL HELP YOU quickly identify an Avery Dennison part number by a competitive part. Simply find the competitive part number (listed in sequential order) and read across. You will find the competitive differences, a brief description of the item, size and tensile strength, packaging quantity, and the corresponding Avery Dennison part number.

RICHCO	RICHCO DIFFERENCES	DESCRIPTION	SIZE / TENS STRENGTH	PACKAGE QUANTITY	EVERY DENNISON
BT-5-01-BK	RLSBL	BLACK S-TIE NYLON	5"/18LBS	5M/CS	08359
BT-5-10-NT	RLSBL	NATURAL S-TIE NYLON	5"/18LBS	5M/CS	08350
BT-5-10-RD	RLSBL	RED S-TIE	5"/18LBS	5M/CS	08354
BT-5-10-YL	RLSBL	YELLOW S-TIE	5"/18LBS	5M/CS	08355
BT-8-10-NT	RLSBL	NAT NYLON S-TIE	8"/18LBS	2M/CS	08320
FTH-1-C		LOW PROFILE MNT	#8 SCR	100/BG	08458
FTH-3-C		PUSH-IN MNT	1/4" HOLE	100/BG	10056
FTH-5A-RT-C		ACRYLIC ADH MNT	3/4"	100/BG	08461
FTH-7A-RT-C		ACRYLIC ADH MNT	1"	100/BG	08462
KL-450-M	1M/BG	WHITE FLIP CLIP		500/RL	08317
TL-450-M	1M/BG	WHITE FLIP CLIP		1M/BG	08316
SFCC-4-01A-RT		ADH FLAT CABLE CLIP		100/BG	08406
WIT-2		HAND TOOL		1	08480
WIT-3		EXTRA HD TOOL		1	10257
WIT-4		BAR-LOK II TOOL		6	10624
WIT-18R-C	4.5"	NAT	4"/18LBS	100/BG	08434
WIT-18R-HS-M	4.5"	BLACK HS	4"/18LBS	1M/BG	08404
WIT-18R-M	4.5"	NAT	4"/18LBS	1M/BG	08432
	4.5"	NAT	4"/18LBS	1M/BG	08432
WIT-18SF-C		NAT	3.25"/18LBS	100/BG	08519
WIT-18SF-M		NAT	3.25"/18LBS	1M/BG	08429
WIT-30R-C	5.75" 30LBS	NAT	5.5"/40LBS	100/BG	08383
WIT-30R-M	5.75" 30LBS	NAT	5.5"/40LBS	1M/BG	08376
	5.75" 30LBS	NAT	5.5"/40LBS	1M/BG	08376
WIT-30RRA-4-M	6.31" 30LBS	NAT WNG PUSH MNT	7.5"/50LBS	1M/BG	10580
WIT-40L-C	7.31"	NAT (LADDER)	7"/40LBS	100/BG	08476
WIT-40L-M	7.31"	NAT (LADDER)	7"/40LBS	1M/BG	08470
WIT-40R-C	5.75"	NAT	5.5"/40LBS	100/BG	08383
WIT-40R-M	5.75"	NAT	5.5"/40LBS	1M/BG	08376
WIT-50L-C	15.31"	NAT	15"/50LBS	100/BG	08427
	15.31"	NAT (SUPER BL)	15"/50LBS	100/BG	10006
WIT-50L-HS-C	15.31"	BLACK HS	15"/50LBS	100/BG	08416
	15.31"	BLACK HS (SUPER BL)	15"/50LBS	100/BG	10008
WIT-50L-HS-M	15.31" 1M/BG	BLACK HS	15"/50LBS	500/BG	10408
	15.31" 1M/BG	BLACK HS (SUPER BL)	15"/50LBS	500/BG	10345
WIT-50L-M	15.31" 1M/BG	NAT	15"/50LBS	500/BG	10036
	15.31" 1M/BG	NAT (SUPER BL)	15"/50LBS	500/BG	10344
WIT-50R-C	8"	NAT	7.5"/50LBS	100/BG	08436
	8"	NAT (SUPER BL)	7.5"/50LBS	100/BG	10004
WIT-50R-HS-M	8" 50LBS	BLACK HS	7.5"/50LBS	1M/BG	08402
	8" 50LBS	BLACK HS (SUPER BL)	7.5"/50LBS	1M/BG	10003
WIT-50R-M	8"	NAT	7.5"/50LBS	1M/BG	08387
WIT-50R-MIL	8"	NAT (SUPER BL)	7.5"/50LBS	1M/BG	10001
WIT-50RLA-C	8.88"	NAT P-MNT	7.5"/50LBS	100/BG	08439
WIT-50RLA-M	8.88"	NAT P-MNT	7.5"/50LBS	1M/BG	08414
WIT-50RLDH-M	8.88"	NAT DBL HEAD	7.5"/50LBS	1M/BG	10424
WIT-50RR-C	8"	NAT RLSBL	7.5"/50LBS	100/BG	10364
WIT-50RR-M	8"	NAT RLSBL	7.5"/50LBS	1M/BG	10361
WIT-60R-C	10.75" 60LBS	NAT	11"/50LBS	100/BG	08859
	10.75" 60LBS	NAT (LADDER)	11"/40LBS	100/BG	08477
WIT-60R-HS-C	10.75" 60LBS	BLACK HS (LADDER)	11"/40LBS	100/BG	08479
WIT-60R-HS-M	10.75" 60LBS	BLACK HS	11"/50LBS	1M/BG	08056
	10.75" 60LBS	BLACK HS (LADDER)	11"/40LBS	1M/BG	08473
WIT-60R-M	10.75" 60LBS	NAT	11"/50LBS	1M/BG	08600
WIT-60R-MIL	10.75" 60LBS	NAT (LADDER)	11"/40LBS	1M/BG	08471
WIT-120L-C	21.25" 100/BG	NAT	21"/120LBS	50/BG	10606
WIT-120R-C	21.25" 100/BG	NAT	14.5"/120LBS	100/BG	10038
WIT-120R-HS-C		BLACK HS	14.5"/120LBS	100/BG	08403
WIT-120R-MIL	500/BG	NAT	14.5"/120LBS	100/BG	10038
WIT-175L-L		NAT	33"/175LBS	25/BG	10049
WIT-F1-18R-C	4.5"	NAT ID	4"/18LBS	100/BG	08417
WIT-F1-18R-M	4.5"	NAT ID	4"/18LBS	1M/BG	08412
WIT-MK1	1.29" x .50"	ID PLATE	1.5"L x 3/4"W	100/BG	08457
WITS-50MR-C	11.25"	NAT S-MNT	11"/50LBS	100/BG	10353
WITS-50MR-M	11.25"	NAT S-MNT	11"/50LBS	1M/BG	10350
WITS-50MRL-C	8.69"	NAT S-MNT	7.5"/50LBS	100/BG	08484
WITS-50MRL-M	8.69"	NAT S-MNT	7.5"/50LBS	1M/BG	08415
WITS-120MR-C	15.63"	NAT S-MNT	14.5"/120LBS	100/BG	10035

PART NO.	STYLE	PAGE
08056	11"/279.4mm BLACK HEAT STABILIZED	9
08286	11"/279.4mm BLACK WEATHER RESISTANT	9
08316	FLIP CLIP	18
08317	FLIP CLIP	18
08318	7.5"/190.5mm BLACK WR SCREW MOUNT	21
08319	8"/203.2mm NATURAL	15
08320	8"/203.2mm NATURAL NYLON – SECUR-ATIE®	14
08350	5"/127mm NATURAL – SECUR-ATIE®	14
08354	5"/127mm RED – SECUR-ATIE®	14
08355	5"/127mm YELLOW – SECUR-ATIE®	14
08356	5"/127mm BLUE – SECUR-ATIE®	14
08357	5"/127mm GREEN – SECUR-ATIE®	14
08358	5"/127mm ORANGE – SECUR-ATIE®	14
08359	5"/127mm BLACK – SECUR-ATIE®	14
08362	5"/127mm NATURAL POLYPROPYLENE – SECUR-ATIE®	14
08376	5.5"/139.7mm NATURAL	8
08377	8"/203.2mm NATURAL	8
08378	14.5"/368.3mm NATURAL	10
08380	8"/203.2mm BLACK WEATHER RESISTANT	8
08381	PNEUMATIC HAND TOOL	6
08382	14.5"/368.3mm BLACK WEATHER RESISTANT	10
08383	5.5"/139.7mm NATURAL	8
08384	5.5"/139.7mm BLACK WEATHER RESISTANT	8
08385	8"/203.2mm NATURAL LARGE HS 1/4"/6.35mm	8
08386	8"/203.2mm BLACK WEATHER RESISTANT	8
08387	7.5"/190.5mm NATURAL	9
08388	7.5"/190.5mm BLACK WEATHER RESISTANT	9
08400	5.5"/139.7mm BLACK HEAT STABILIZED	8
08401	8"/203.2mm BLACK HEAT STABILIZED	8
08402	7.5"/190.5mm BLACK HEAT STABILIZED	9
08403	14.5"/368.3mm BLACK HEAT STABILIZED	10
08404	4"/101.6mm BLACK HEAT STABILIZED	8
08406	ADHESIVE FLAT CABLE CLIP	23
08412	4"/101.6mm NATURAL ID	25
08413	7.5"/190.5mm NATURAL ID	25
08414	7.5"/190.5mm NATURAL PUSH MOUNT	20
08415	7.5"/190.5mm NATURAL SCREW MOUNT	21
08416	15"/381mm BLACK HEAT STABILIZED	9
08417	4"/101.6mm NATURAL ID	25
08419	7.5"/190.5mm NATURAL ID	25
08426	14.5"/368.3mm NATURAL SCREW MOUNT	21
08427	15"/381mm NATURAL	9
08428	15"/381mm BLACK WEATHER RESISTANT	9
08431	5.5"/139.7mm BLACK WEATHER RESISTANT	8
08432	4"/101.6mm NATURAL	8
08433	4"/101.6mm BLACK WEATHER RESISTANT	8
08434	4"/101.6mm NATURAL	8
08435	4"/101.6mm BLACK WEATHER RESISTANT	8
08436	7.5"/190.5mm NATURAL	9
08437	7.5"/190.5mm BLACK WEATHER RESISTANT	9
08439	7.5"/190.5mm NATURAL PUSH MOUNT	20
08441	14.5"/368.3mm BLACK HS SCREW MOUNT	21
08443	7.5"/190.5mm BLACK HS SCREW MOUNT	21
08444	7.5"/190.5mm BLACK WR SCREW MOUNT	21
08445	7.5"/190.5mm BLACK HS PUSH MOUNT	20
08446	7.5"/190.5mm BLACK WR PUSH MOUNT	20
08457	IDENTIFICATION PLATE	23
08461	3/4"/19.05mm ACRYLIC ADHESIVE MOUNT	23
08462	1"/25.4mm ACRYLIC ADHESIVE MOUNT	23
08463	1"/25.4mm PLAIN BACK MOUNT	23
08470	7"/177.8mm NATURAL	13
08471	11"/279.4mm NATURAL	13
08472	7"/177.8mm BLACK HEAT STABILIZED	13
08473	11"/279.4mm BLACK HEAT STABILIZED	13
08476	7"/177.8mm NATURAL	13
08477	11"/279.4mm NATURAL	13
08478	7"/177.8mm BLACK HEAT STABILIZED	13
08479	11"/279.4mm BLACK HEAT STABILIZED	13
08480	HAND TOOL	6
08484	7.5"/190.5mm NATURAL SCREW MOUNT	21
08506	BLACK MARKING PEN	25
08508	4"/101.6mm RED	8
08582	4"/101.6mm ORANGE	8
08583	4"/101.6mm YELLOW	8
08584	4"/101.6mm GREEN	8
08587	4"/101.6mm BLUE	8
08600	11"/279.4mm NATURAL	9

PART NO.	STYLE	PAGE
08664	8"/203.2mm GREEN	8
08671	8"/203.2mm BLUE	8
08690	8"/203.2mm RED	8
08782	8"/203.2mm YELLOW	8
08859	11"/279.4mm NATURAL	9
08930	11"/279.4mm BLACK WEATHER RESISTANT	9
10001	7.5"/190.5mm SUPER BAR-LOK NATURAL	12
10003	7.5"/190.5mm SUPER BAR-LOK BLACK HS	12
10004	7.5"/190.5mm SUPER BAR-LOK NATURAL	12
10005	7.5"/190.5mm SUPER BAR-LOK BLACK HS	12
10006	15"/381mm SUPER BAR-LOK NATURAL	12
10008	15"/381mm SUPER BAR-LOK BLACK HS	12
10027	TIE ANCHOR BASE #8 SCREW	23
10028	TIE ANCHOR BASE #10 SCREW	23
10029	3/4"/19.05mm RUBBER BASED ADHESIVE MOUNT	23
10030	1"/25.4mm RUBBER BASED ADHESIVE MOUNT	23
10031	4"/101.6mm WHITE ID	25
10035	14.5"/368.3mm NATURAL SCREW MOUNT	21
10036	15"/381mm NATURAL	9
10037	15"/381mm BLACK WEATHER RESISTANT	9
10038	14.5"/368.3mm NATURAL	10
10039	14.5"/368.3mm BLACK WEATHER RESISTANT	10
10040	14.5"/368.3mm BLACK WR SCREW MOUNT	21
10044	CRADLE MOUNT SMALL #4 SCREW	23
10045	CRADLE MOUNT MED. #8 SCREW	23
10046	CRADLE MOUNT LG. #10 SCREW	23
10049	34"/838.2mm NATURAL	11
10050	34"/838.2mm BLACK WEATHER RESISTANT	11
10056	PUSH-IN MOUNT 1/4"/6.35mm HOLE	23
10079	CRADLE MOUNT LARGE HS 1/4"/6.35mm SCREW	23
10146	8"/203.2mm RED	15
10147	8"/203.2mm ORANGE	15
10148	8"/203.2mm YELLOW	15
10149	8"/203.2mm GREEN	15
10150	8"/203.2mm BLUE	15
10154	8"/203.2mm BLACK	15
10155	8"/203.2mm WHITE	15
10257	EXTRA HEAVY DUTY TOOL	7
10319	8"/203.2mm BLACK HS STOPPER	18
10325	8"/203.2mm SLIM LINE	16
10326	8"/203.2mm BLACK HS SLIM LINE	16
10327	8"/203.2mm BLACK WR SLIM LINE	16
10328	8"/203.2mm SLIM LINE	16
10330	8"/203.2mm BLACK WR SLIM LINE	16
10335	15"/381mm NATURAL SLIM LINE	16
10336	15"/381mm BLACK HS SLIM LINE	16
10338	15"/381mm NATURAL SLIM LINE	16
10339	15"/381mm BLACK HS SLIM LINE	16
10344	15"/381mm SUPER BAR-LOK NATURAL	12
10345	15"/381mm SUPER BAR-LOK BLACK HS	12
10350	11"/279.4mm NATURAL SCREW MOUNT	21
10351	11"/279.4mm BLACK HS SCREW MOUNT	21
10352	11"/279.4mm BLACK WR SCREW MOUNT	21
10354	11"/279.4mm BLACK WR SCREW MOUNT	21
10355	11"/279.4mm NATURAL PUSH MOUNT	20
10359	11"/279.4mm BLACK WR PUSH MOUNT	20
10361	7.5"/190.5mm NATURAL RELEASABLE	19
10362	7.5"/190.5mm BLACK HS RELEASABLE	19
10363	7.5"/190.5mm BLACK WR RELEASABLE	19
10364	7.5"/190.5mm NATURAL RELEASABLE	19
10366	7.5"/190.5mm BLACK WR RELEASABLE	19
10367	11"/279.4mm NATURAL RELEASABLE	19
10368	11"/279.4mm BLACK HS RELEASABLE	19
10369	11"/279.4mm BLACK WR RELEASABLE	19
10370	11"/279.4mm NATURAL RELEASABLE	19
10391	6"/152.4mm NATURAL SLIM LINE	16
10392	6"/152.4mm BLACK HS SLIM LINE	16
10393	6"/152.4mm BLACK WR SLIM LINE	16
10394	6"/152.4mm NATURAL SLIM LINE	16
10396	6"/152.4mm BLACK WR SLIM LINE	16
10406	8"/203.2mm BLACK HS STOPPER	18
10408	15"/381mm BLACK HEAT STABILIZED	9
10424	7.5"/190.5mm NATURAL DOUBLE HEAD	19
10425	7.5"/190.5mm BLACK HS DOUBLE HEAD	19
10426	7.5"/190.5mm BLACK WR DOUBLE HEAD	19
10427	7.5"/190.5mm NATURAL DOUBLE HEAD	19
10428	7.5"/190.5mm BLACK HS DOUBLE HEAD	19

PART NO.	STYLE	PAGE
10430	11"/ 279.4mm NATURAL DOUBLE HEAD	19
10431	11"/ 279.4mm BLACK HS DOUBLE HEAD	19
10432	11"/ 279.4mm BLACK WR DOUBLE HEAD	19
10606	21"/ 533.4mm NATURAL	10
10607	21"/ 533.4mm BLACK HEAT STABILIZED	10
10608	21"/ 533.4mm BLACK WEATHER RESISTANT	10
10612	24"/ 609.6mm NATURAL	11
10613	24"/ 609.6mm BLACK HEAT STABILIZED	11
10614	24"/ 609.6mm BLACK WEATHER RESISTANT	11
10618	28"/ 711.2mm NATURAL	11
10619	28"/ 711.2mm BLACK HEAT STABILIZED	11
10620	28"/ 711.2mm BLACK WEATHER RESISTANT	11
10624	BAR-LOK II, LIGHTWEIGHT TOOL	7
10639	HEAVY DUTY TOOL	7
10660	11"/ 279.4mm BLACK HS STOPPER	18
10673	5"/ 127mm NATURAL – SECUR-ATIE®	14
10687	4"/ 101.6mm NATURAL FLAG ID	25
10690	4"/ 101.6mm NATURAL WINGED PUSH MOUNT	20
10691	4"/ 101.6mm BLACK HS WINGED PUSH MOUNT	20
10700	MERCHANDISE PAIRING TIE	18
10985	11.5"/ 292.1mm NATURAL SLIM LINE	16
10994	1/2"/ 12.7mm WIDTH BLK VELCRO® CONT. ROLL	17
10995	3/4"/ 19.05mm WIDTH BLK VELCRO® CONT. ROLL	17
10996	6"/ 152.4mm BLACK VELCRO® STRIP TIES, 1/2" W.	17
10997	12"/ 304.8mm BLACK VELCRO® STRIP TIES, 1/2" W.	17
10998	18"/ 457.2mm BLACK VELCRO® STRIP TIES, 3/4" W.	17
10999	8"/ 203.2mm BLACK VELCRO® LOOP TIES, 1" W.	17
11000	12"/ 304.8mm BLACK VELCRO® LOOP TIES, 1" W.	17
11002	12"/ 304.8mm BLACK VELCRO® CINCH TIES, 3/4" W.	17
11003	18"/ 457.2mm BLACK VELCRO® CINCH TIES, 3/4" W.	17
11004	VELCRO® CABLE TIE ASSORTMENT PACK	17
20004-O	7"/ 181mm BLACK SECURITY TIE	15
20004-G	7"/ 181mm GREEN SECURITY TIE	15
20004-B	7"/ 181mm BLUE SECURITY TIE	15
20004-R	7"/ 181mm RED SECURITY TIE	15
20064-O	5"/ 127mm BLACK SECURITY TIE	15
20064-B	5"/ 127mm BLUE SECURITY TIE	15
20064-G	5"/ 127mm GREEN SECURITY TIE	15
20064-R	5"/ 127mm RED SECURITY TIE	15

UNITED STATES

Avery Dennison Corporation
Fastener Division
224 Industrial Road
Fitchburg, MA 01420
Tel: 800-225-5913
Fax: 800-848-2169

MEXICO

Avery Dennison de Mexico
Aristoteles #123
Parque Industrial Kalos
Apodaca, Nuevo Leon
66600 Mexico
Tel: 52 (81) 8386-4496
Fax: 52 (81) 8864-4101

CANADA

Avery Dennison Canada, Inc.
Fastener & Hand Labeling Div.
195 Admiral Blvd.
Mississauga, ON L5T 2T3
Tel: 800-363-2347
Fax: 800-263-2347
Email: fastcan@averydennison.com

BRAZIL

Avery Dennison do Brasil Ltda.
Rua Francisco Foga, 225
CP 18 – CEP 13280-000
Vinhedo-SP, Brasil
Tel: 55-19-3876-7696/0800-7010076
Fax: 55-19-3876-6763

UNITED KINGDOM

Avery Dennison Fastener Europe
14-16 Thomas Road
Wooburn Industrial Park
Wooburn Green
Bucks HP10 0PE
United Kingdom
Tel: 44 (0) 1628 859500
Fax: 44 (0) 1628 859567

FRANCE

Avery Dennison Fastener France
10/12 Rue du saule Trapu
BP 217
91882 Massy Cedex,
France
Tel: 33 (0) 169 535654
Fax: 33 (0) 169 530417

ITALY

Avery Dennison Fastener Italia SpA
Via per Uboldo 48
21040 Gerenzano (VA)
Italia
Tel: 39 02 966 82 35
Fax: 39 02 966 82 49

GERMANY

Avery Dennison Deutschland GmbH
Geschäftsbereich Fastener
Zum Panrepel 15, 28307 Bremen
Postfach 44 88 25, 28288 Bremen
Tel. 0421/485 26 50 – 0
Fax 0421/485 26 50 – 9

TURKEY

Avery Dennison Etiket Tic.Ltd. _ti.
Uzunçayır Cad. No: 14
Hasanpa_a Kadikoy
81010 – _stanbul, Turkey
Tel: 90 216 428 55 60 pbx
Fax: 90 216 428 55 72

HONG KONG

Avery Dennison (HK) Ltd.
1/F., No. 7 Chun Ying Street
Tseung Kwan O Industrial Estate
New Territories
Hong Kong
Tel: 852-2555-9441
Fax: 852-2873-6436

CHINA

Avery Dennison Converted
Products Ltd.
Factory No. 2, Jin Ling Road
Da Chong Village
Nansha Economic and Technological
Development Zone
Guangzhou, 511458 PRC
Tel: (86-20) 8498-3415
Fax: (86-20) 8498-3401

JAPAN

Tokyo Office
Avery Dennison Overseas Corporation
6-47-8 Fujimi-Cho
Tachikawa-City, Tokyo 190-0013
Japan
Tel: 81-42-526-7310
Fax: 81-42- 526-7315

JAPAN

Osaka Office
Avery Dennison Overseas Corporation
Shin-Osaka Ikushima Bldg, 7F
5-1-3 Miyahara, Yodogawa-ku
Osaka-City, Osaka 532-0003
Japan
Tel: 81-6-397-7451
Fax: 81-6-397-7453

KOREA

Avery Dennison Korea Ltd.
872, Kwan Yang 2-Dong, DongAn-Ku
AnYang-Si, Kyounggi-Do
Korea 431-062
Tel: 82-31-425-6140
Fax: 82-31-425-6145

EUROPE, MIDDLE EAST AND AFRICA

Avery Dennison Fastener Europe
14-16 Thomas Road
Wooburn Industrial Park
Wooburn Green
Bucks HP10 0PE
United Kingdom
Tel: 44 (0) 1628 859500
Fax: 44 (0) 1628 859567

Authorized Avery Dennison Distributor



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.