

ALUMINUM ELECTROLYTIC CAPACITORS

LNU

Screw Terminal Type, 105°C
High Voltage, Smaller Sized.




- Suited for use in industrial power supplies for inverter circuitry, etc.
- Rated voltage range up to DC525V.
- Load life of 5000 hours application of ripple current at 105°C.
- High voltage / Smaller sized than LNT.
- Coped with loading of high speed charge-discharge.
- Suited for high frequency regenerative voltage for AC servomotor, general inverter.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

Specifications

| Item | Performance Characteristics | |
|--|--|--|
| Category Temperature Range | - 40 to +105°C | |
| Rated Voltage Range | 400 to 525V | |
| Rated Capacitance Range | 680 to 18000μF | |
| Capacitance Tolerance | ±20% (120Hz, 20°C) | |
| Leakage Current | After 5 minutes' application of rated voltage, leakage current is not more than $3\sqrt{CV}$ (μA) or 5 mA, whichever is smaller. (at 20°C) [C: Rated Capacitance(μF), V: Voltage (V)] | |
| Tangent of loss angle (tan δ) | See refer to next page (Measurement frequency : 120Hz at 20°C) | |
| Stability at Low Temperature | Rated voltage(V) | 400 to 525 |
| | Impedance ratio ZT/Z20(MAX.) | $Z - 40^{\circ}\text{C} / Z + 20^{\circ}\text{C}$ 8 |
| Measurement frequency : 120Hz | | |
| Insulation Resistance | The insulation resistance shall be more than 100MΩ at DC 500V application between terminal and bracket. | |
| Voltage proof | There is no abnormality during AC 2500V 1 minute's application between terminal and bracket. | |
| Endurance | Capacitance change | Within ±20% of the initial capacitance value |
| | tan δ | 200% or less than the initial specified value |
| | Leakage current | Less than or equal to the initial specified value |
| Shelf Life | Capacitance change | Within ±20% of the initial capacitance value |
| | tan δ | 200% or less than the initial specified value |
| | Leakage current | Less than or equal to the initial specified value |
| Endurance of charge - discharge behavior | Capacitance change | Within ±20% of the initial capacitance value |
| | tan δ | 200% or less than the initial specified value |
| | Leakage current | Less than or equal to the initial specified value |
| Marking | Printed with white color letter on black sleeve | |

Drawing

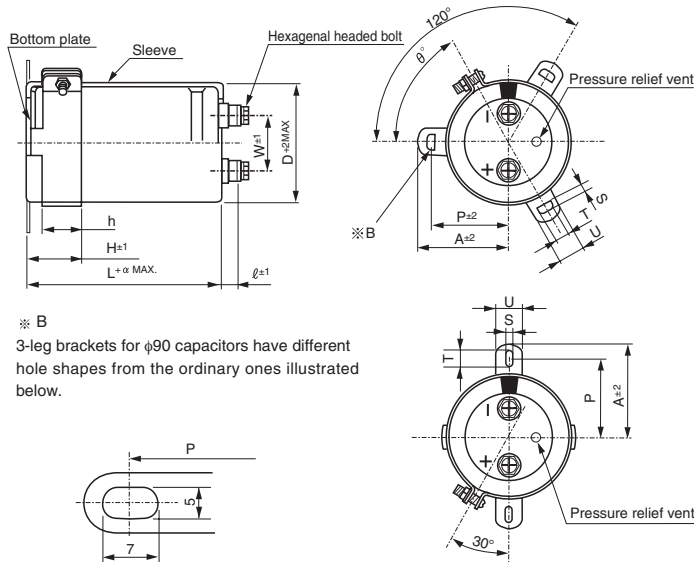

Note) The brackets will be supplied in the separate box.

Dimension of terminal pitch (W) and length (ℓ) and Nominal dia. of bolt (mm)

| φD | W | ℓ | α | Nominal dia. of bolt |
|------|------|---|---|----------------------|
| 51 | 22.0 | 6 | 3 | M5 |
| 63.5 | 28.6 | 6 | 3 | M5 |
| 76.2 | 31.8 | 6 | 3 | M5 |
| 90 | 31.8 | 6 | 3 | M5 |

About product of stud bolt
 * Nylon nut and nylon washer attachment become the standard specifications. (cf. P.348)
 * It is not attached to the bracket.
 * Field 13 and 14 become blank in Type number system.

Type numbering system (Example : 500V 4700μF)



Please refer to page 348 for schematic of dimensions.
 ※ Please contact to us if PVC less products are required.

Dimensions of mounting bracket (mm)

| Symbol | Leg shape φD | 3-Leg | | | | 2-Leg | | | |
|--------|--------------|-------|------|------|------|-------|------|------|-----|
| | | 51 | 63.5 | 76.2 | 90 | 51 | 63.5 | 76.2 | 90 |
| P | | 32.5 | 38.1 | 44.5 | 50.8 | 33.2 | 40.5 | 46.5 | 53 |
| A | | 38.5 | 43 | 49.2 | 58.5 | 40 | 46.5 | 53 | 59 |
| T | | 7.5 | 8.0 | 7.0 | 8.0 | 6.0 | 7.0 | 6.0 | 6.0 |
| S | | 5.0 | 5.0 | 5.0 | 5.0 | 4.5 | 4.5 | 4.5 | 4.5 |
| U | | 12 | 14 | 14 | 18 | 14 | 14 | 14 | 14 |
| θ° | | 60 | 60 | 60 | 60 | 30 | 30 | 30 | 30 |
| H | | 20 | 25 | 30 | 35 | 25 | 35 | 35 | 35 |
| h | | 15 | 20 | 24 | 25 | 15 | 20 | 20 | 20 |

● Dimension table in next page.

LNU

■ Dimensions

| 400V (2G) | | | | | |
|-----------|-----------------|---------------------|-------|----------------------|--------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (Arms) | tan δ | Leakage Current (mA) | Code |
| 2700 | 63.5 × 80 | 11.9 | 0.20 | 3.12 | LNU2G272MSEG |
| 3300 | 63.5 × 95 | 13.6 | 0.20 | 3.45 | LNU2G332MSEG |
| | 76.2 × 75 | 13.1 | 0.20 | 3.45 | LNU2G332MSEH |
| 3900 | 63.5 × 100 | 14.6 | 0.20 | 3.75 | LNU2G392MSEG |
| | 76.2 × 85 | 14.3 | 0.20 | 3.75 | LNU2G392MSEH |
| 4700 | 63.5 × 120 | 16.1 | 0.20 | 4.11 | LNU2G472MSEG |
| | 76.2 × 95 | 15.8 | 0.20 | 4.11 | LNU2G472MSEH |
| 5600 | 63.5 × 135 | 17.7 | 0.20 | 4.49 | LNU2G562MSEG |
| | 76.2 × 105 | 17.1 | 0.20 | 4.49 | LNU2G562MSEH |
| 6800 | 76.2 × 125 | 19.5 | 0.20 | 4.95 | LNU2G682MSEH |
| | 90 × 105 | 18.8 | 0.20 | 4.95 | LNU2G682MSEJ |
| 8200 | 76.2 × 170 | 24.2 | 0.20 | 5.00 | LNU2G822MSEH |
| | 90 × 125 | 23.1 | 0.20 | 5.00 | LNU2G822MSEJ |
| 10000 | 90 × 145 | 25.9 | 0.20 | 5.00 | LNU2G103MSEJ |
| 12000 | 90 × 165 | 30.1 | 0.20 | 5.00 | LNU2G123MSEJ |
| 15000 | 90 × 195 | 33.5 | 0.20 | 5.00 | LNU2G153MSEJ |
| 18000 | 90 × 235 | 38.0 | 0.20 | 5.00 | LNU2G183MSEJ |

| 450V (2W) | | | | | |
|-----------|-----------------|---------------------|-------|----------------------|--------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (Arms) | tan δ | Leakage Current (mA) | Code |
| 2700 | 63.5 × 100 | 13.1 | 0.20 | 3.31 | LNU2W272MSEG |
| 3300 | 63.5 × 120 | 15.0 | 0.20 | 3.66 | LNU2W332MSEG |
| | 76.2 × 95 | 14.4 | 0.20 | 3.66 | LNU2W332MSEH |
| 3900 | 63.5 × 135 | 16.3 | 0.20 | 3.97 | LNU2W392MSEG |
| | 76.2 × 105 | 15.4 | 0.20 | 3.97 | LNU2W392MSEH |
| 4700 | 63.5 × 165 | 18.5 | 0.20 | 4.36 | LNU2W472MSEG |
| | 76.2 × 130 | 17.9 | 0.20 | 4.36 | LNU2W472MSEH |
| 5600 | 76.2 × 150 | 20.5 | 0.20 | 4.76 | LNU2W562MSEH |
| | 90 × 105 | 19.6 | 0.20 | 4.76 | LNU2W562MSEJ |
| 6800 | 76.2 × 170 | 23.4 | 0.20 | 5.00 | LNU2W682MSEH |
| | 90 × 125 | 22.5 | 0.20 | 5.00 | LNU2W682MSEJ |
| 8200 | 76.2 × 195 | 25.7 | 0.20 | 5.00 | LNU2W822MSEH |
| | 90 × 145 | 24.7 | 0.20 | 5.00 | LNU2W822MSEJ |
| 10000 | 90 × 165 | 27.3 | 0.20 | 5.00 | LNU2W103MSEJ |
| 12000 | 90 × 195 | 29.9 | 0.20 | 5.00 | LNU2W123MSEJ |
| 15000 | 90 × 235 | 34.5 | 0.20 | 5.00 | LNU2W153MSEJ |

| 500V (2H) | | | | | |
|-----------|-----------------|---------------------|-------|----------------------|--------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (Arms) | tan δ | Leakage Current (mA) | Code |
| 680 | 51 × 75 | 4.0 | 0.20 | 1.75 | LNU2H681MSEF |
| 1000 | 51 × 90 | 5.0 | 0.20 | 2.12 | LNU2H102MSEF |
| 1200 | 51 × 115 | 5.7 | 0.20 | 2.32 | LNU2H122MSEF |
| | 63.5 × 80 | 5.7 | 0.20 | 2.32 | LNU2H122MSEG |
| 1500 | 51 × 135 | 6.6 | 0.20 | 2.60 | LNU2H152MSEF |
| | 63.5 × 90 | 6.6 | 0.20 | 2.60 | LNU2H152MSEG |
| 1800 | 63.5 × 100 | 7.4 | 0.20 | 2.85 | LNU2H182MSEG |
| | 76.2 × 70 | 7.4 | 0.20 | 2.85 | LNU2H182MSEH |
| 2200 | 63.5 × 120 | 8.5 | 0.20 | 3.15 | LNU2H222MSEG |
| | 76.2 × 95 | 8.5 | 0.20 | 3.15 | LNU2H222MSEH |
| 2700 | 63.5 × 135 | 9.6 | 0.20 | 3.49 | LNU2H272MSEG |
| | 76.2 × 105 | 9.6 | 0.20 | 3.49 | LNU2H272MSEH |
| 3300 | 63.5 × 165 | 10.9 | 0.20 | 3.85 | LNU2H332MSEG |
| | 76.2 × 130 | 10.9 | 0.20 | 3.85 | LNU2H332MSEH |
| 3900 | 76.2 × 145 | 12.4 | 0.20 | 4.19 | LNU2H392MSEH |
| | 90 × 105 | 12.4 | 0.20 | 4.19 | LNU2H392MSEJ |
| 4700 | 76.2 × 165 | 13.9 | 0.20 | 4.60 | LNU2H472MSEH |
| | 90 × 125 | 13.9 | 0.20 | 4.60 | LNU2H472MSEJ |
| 5600 | 90 × 145 | 15.8 | 0.20 | 5.00 | LNU2H562MSEJ |
| 6800 | 90 × 165 | 18.5 | 0.20 | 5.00 | LNU2H682MSEJ |
| 8200 | 90 × 205 | 20.2 | 0.20 | 5.00 | LNU2H822MSEJ |

| 525V (N7) | | | | | |
|-----------|-----------------|---------------------|-------|----------------------|--------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (Arms) | tan δ | Leakage Current (mA) | Code |
| 680 | 51 × 85 | 4.4 | 0.20 | 1.75 | LNUN7681MSEF |
| 1000 | 51 × 95 | 5.4 | 0.20 | 2.12 | LNUN7102MSEF |
| 1500 | 63.5 × 95 | 7.2 | 0.20 | 2.60 | LNUN7152MSEG |
| 1800 | 63.5 × 105 | 8.0 | 0.20 | 2.85 | LNUN7182MSEG |
| 2200 | 63.5 × 135 | 9.2 | 0.20 | 3.15 | LNUN7222MSEG |
| | 76.2 × 100 | 9.2 | 0.20 | 3.15 | LNUN7222MSEH |
| 2700 | 76.2 × 115 | 10.6 | 0.20 | 3.49 | LNUN7272MSEH |
| 3300 | 76.2 × 140 | 12.1 | 0.20 | 3.85 | LNUN7332MSEH |
| 4700 | 76.2 × 185 | 15.2 | 0.20 | 4.60 | LNUN7472MSEH |
| | 90 × 135 | 15.2 | 0.20 | 4.60 | LNUN7472MSEJ |
| 5600 | 90 × 155 | 17.5 | 0.20 | 5.00 | LNUN7562MSEJ |

Rated ripple current (Arms) at 105°C 120Hz

● Frequency coefficient of rated ripple current

| Frequency (Hz) | 50 | 60 | 120 | 360 | 1k | 10k or more |
|----------------|------|------|------|------|------|-------------|
| Coefficient | 0.80 | 0.82 | 1.00 | 1.20 | 1.30 | 1.40 |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.