

CGS701AV

Commercial Low Skew PLL 1 to 8 CMOS Clock Driver

CGS701ATV

Industrial Low Skew PLL 1 to 8 CMOS Clock Driver

General Description

CGS701A is an off the shelf clock driver specifically designed for today's high speed designs. It provides low skew outputs which are produced at different frequencies from three fixed input references. The XTALIN input pin is designed to be driven from a 25 MHz–40 MHz crystal oscillator.

The PLL, using a charge pump and an internal loop filter, multiplies this input frequency to create a maximum output frequency of four times the input.


The device includes a TRI-STATE® control pin to disable the outputs. This feature allows for low frequency functional testing and debugging.

Also included, is an EXTSEL pin to allow testing the chip via an external source. The EXTSEL pin, once set to high, causes the External-Clock__MUX to change its input from the output of the VCO and Counter to the external clock signal provided via SKWTST input pin. (continued)

Features

- Guaranteed:
 - 400 ps pin-to-pin skew (t_{OSHL} and t_{OSLH}) on 1X outputs.
- Pentium® and PowerPC™ compatible
- ± 300 ps propagation delay
- Output buffer of eight drivers for large fanout
- 25 MHz–160 MHz output frequency range
- Outputs operating at 4X, 2X, 1X of the reference frequency for multifrequency bus applications
- Selectable output frequency
- Internal loop filter to reduce noise and jitter
- Separate analog and digital V_{CC} and ground pins
- Low frequency test mode by disabling the PLL
- Implemented on National's Core CMOS process
- Symmetric output current drive: $+30/-30$ mA I_{OL}/I_{OH}
- Industrial temperature of -40°C to $+85^{\circ}\text{C}$
- 28-pin PLCC for optimum skew performance
- Guaranteed 2k volts ESD protection

Connection Diagram

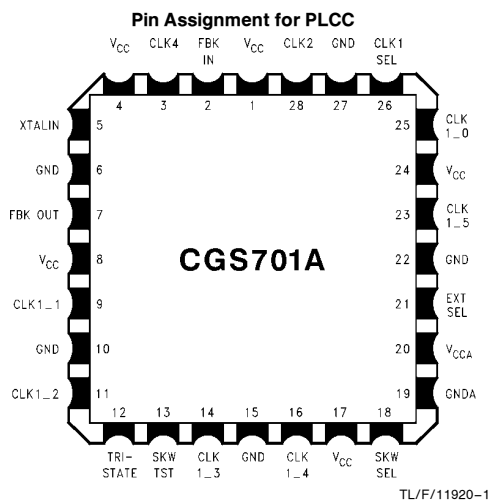

TRI-STATE® is a registered trademark of National Semiconductor Corporation.
Pentium® is a registered trademark of Intel Corporation.
PowerPC™ is a trademark of International Business Machines Corporation.

Pin Description

PLCC Package

Pin	Name	Description
1	V_{CC}	Digital V_{CC}
2	FBK IN	Feedback Input Pin
3	CLK4	4X Clock Output
4	V_{CC}	Digital V_{CC}
5	XTALIN	Crystal Oscillator Input
6	GND	Digital Ground
7	FBK OUT	Feedback Output Pin
8	V_{CC}	Digital V_{CC}
9	CLK1__1	1X Clock Output
10	GND	Digital Ground
11	CLK1__2	1X Clock Output
12	TRI-STATE	Output TRI-STATE Control
13	SKWTST	Skew Testing Pin
14	CLK1__3	1X Clock Output
15	GND	Digital Ground
16	CLK1__4	1X Clock Output
17	V_{CC}	Digital V_{CC}
18	SKWSEL	Skew Test Selector Pin
19	GNDA	Analog Ground
20	V_{CCA}	Analog V_{CC}
21	EXTSEL	External Clock MUX Selector
22	GND	Digital Ground
23	CLK1__5	1X Clock Output
24	V_{CC}	Digital V_{CC}
25	CLK1__0	1X Clock Output
26	CLK1SEL	CLK1 Multiplier Selector
27	GND	Digital Ground
28	CLK2	2X Clock Output

CGS701AV Commercial Low Skew PLL 1 to 8 CMOS Clock Driver
CGS701ATV Industrial Low Skew PLL 1 to 8 CMOS Clock Driver

CGS701A


General Description (Continued)

CLK1SEL pin changes the output frequency of the CLK1_0 thru CLK1_5 outputs. During normal operation, when CLK1SEL pin is high, these outputs are at the same frequency as the input crystal oscillator, while CLK2 and CLK4 outputs are at twice and four times the input frequency respectively.

Once CLK1SEL pin is set to a low logic level, the CLK1 outputs will be at twice the input frequency, the same as the CLK2 output, with CLK4 output still being at four times the input frequency.

In addition, another pin is added for increasing the test capability. SKWSEL pin allows testing of the counter's output and skew of the output drivers by bypassing the VCO. In this test mode CLK4 frequency is the same as SKWTST input frequency, while CLK2 is 1/2 and CLK1 frequencies are 1/4 respectively (refer to the Truth Table). In addition CLK1SEL functionality is also true under this test condition.

Block Diagram

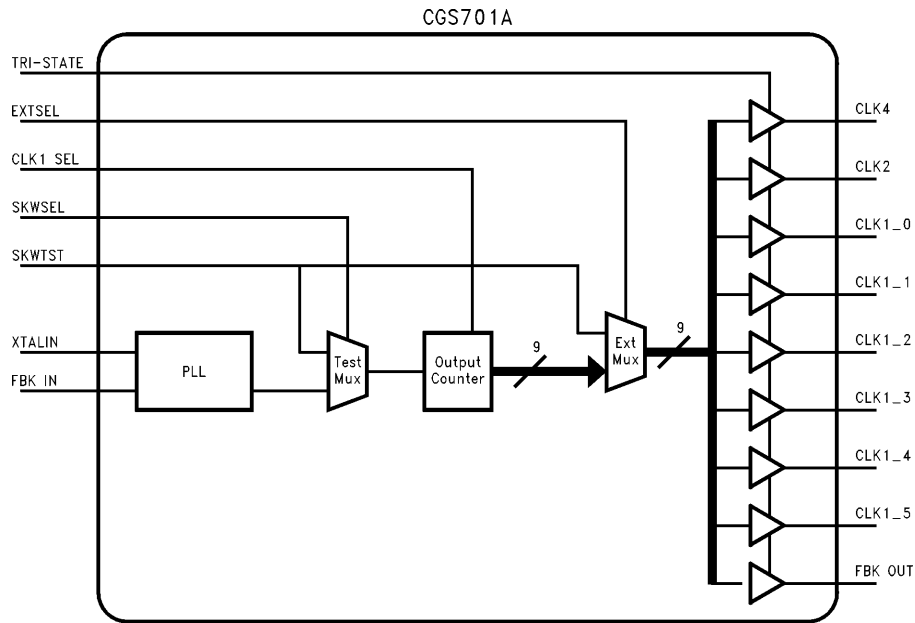

TL/F/11920-2


CGS701A

Truth Table

Input						Output		
CLK1 SEL	EXT SEL	EXT CLK	SKW SEL	SKW TST	TRI-STATE	CLK4	CLK2	CLK1
*H	L	X	L	X	H	4 x f in	2 x f in	f in
*L	L	X	L	X	H	4 x f in	2 x f in	2 x f in
X	H		X	X	H			
H	L	X	H		H	1 x f tst	1/2 x f tst	1/4 x f tst
L	L	X	H		H	1 x f tst	1/2 x f tst	1/2 x f tst
X	X	X	X	X	L	Z	Z	Z

*Steady state phase, frequency lock

Typical Application

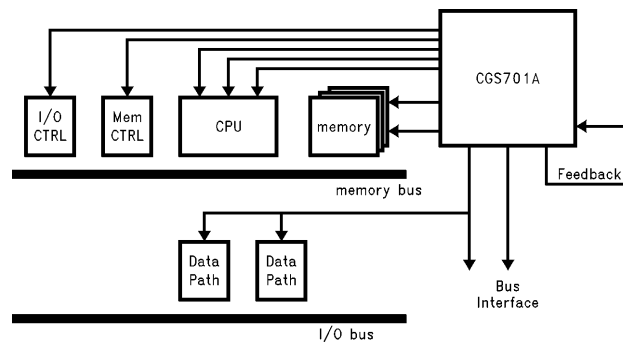

TL/F/11920-3

CGS701A

Absolute Maximum Ratings (Note A)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{CC})	−0.5V to +7.0V
DC Input Voltage Diode Current (I_{IK})	
$V = -0.5V$	−20 mA
$V = V_{CC} + 0.5V$	+20 mA
DC Input Voltage (V_I)	−0.5V to $V_{CC} + 0.5V$
DC Output Diode Current (I_O)	
$V = -0.5V$	−20 mA
$V = V_{CC} + 0.5V$	+20 mA
DC Output Voltage (V_O)	−0.5V to $V_{CC} + 0.5V$
DC Output Source or Sink Current (I_O)	±60 mA
DC V_{CC} or Ground Current per Output Pin (I_{CC} or I_{GND})	±60 mA
Storage Temperature (T_{STG})	−65°C to +150°C
Junction Temperature	150°C
Power Dissipation (Static and Dynamic) (Note B)	1400 mW

Note A: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the DC and AC Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The Recommended Operating Conditions will define the conditions for actual device operation.

Note B: Power dissipation is calculated using 49°C/W as the thermal coefficient for the PCC package at 225 LFM airflow. The input frequency is assumed at 33 MHz with CLK4 at 132 MHz and CLK2 and CLK1 being at 66 MHz. In addition, the ambient temperature is assumed 70°C.

Recommended Operating Conditions

Supply Voltage (V_{CC})	4.5V to 5.5V
Input Voltage (V_I)	0V to V_{CC}
Output Voltage (V_O)	0V to V_{CC}
Input Frequency	25 MHz–40 MHz
Operating Temperature (T_A) SKWTST	0°C to +70°C
External Clock Frequency (Pin)	1 MHz–10 MHz
XTALIN Duty Cycle Range	25/75 (75/25)%
Input Rise and Fall Times (0.8V to 2.0V)	
XTALIN (Pin 5)	5 ns max
All Other Inputs	10 ns max

Typical θ_{JA}	LFM	°C/W
	0	54
	225	45
	500	38
	900	34

DC Electrical Characteristics

Over recommended operating free air temperature range. All typical values are measured at $V_{CC} = 5V$, $T_A = 25^\circ C$.

Symbol	Parameter	$V_{CC} = 4.5V - 5.5V$ $T = 0^\circ C \text{ to } 70^\circ C$			Units	Conditions
		Min	Typ	Max		
V_{IH}	Minimum Input High Level Voltage	2.0			V	
V_{IL}	Maximum Input Low Level Voltage			0.8	V	
V_{OH}	Minimum Output High Level Voltage	$V_{CC} - 0.1$			V	$I_{OUT} = -50 \mu A$ $I_{OH} = -30 \text{ mA}$
		$V_{CC} - 0.6$				
V_{OL}	Maximum Output Low Level Voltage			0.1	V	$I_{OUT} = 50 \mu A$ $I_{OL} = 30 \text{ mA}$
				0.6		
I_{OHD}	High Level Output Current	−50	−110	−170	mA	$V_{OH} = V_{CC} - 1.0V$
I_{OLD}	Low Level Output Current	50	110	170	mA	$V_{OL} = 1.0V$
I_{IN}	Leakage Current	−50		50	μA	$V_{IN} = 0.4V \text{ or } 4.6V$
$I_{OZL/H}$	Output Leakage Current					
C_{IN}	Input Capacitance			10.0	pF	
I_{CC}	Quiescent digital + analog Current (No Load)		3.0	5.0	mA	$V_{IN} = V_{CC}, GND$
I_{CCT}	I_{CC} per TTL Input			2.5		$V_{IN} = V_{CC} - 2.1, GND$

CGS701A

AC Electrical Characteristics

Over recommended operating free air temperature range. All typical values are measured at $V_{CC} = 5V$, $T_A = 25^\circ C$.

Symbol	Parameter			$V_{CC} = 4.5V-5.5V$ $F_{IN} = 25 \text{ to } 40 \text{ MHz}$ $T = 0^\circ C \text{ to } +70^\circ C$ $C_L = \text{Circuit 1}$ $R_L = \text{Circuit 1}$			Units	Notes
				Min	Typ	Max		
t_{rise}	Output Rise	CLK4	0.8V to 2.6V				ns	(Note 1, 7)
		CLK2	1.0V to $V_{CC} - 1.0V$			2.0		
		CLK1	1.0V to $V_{CC} - 1.0V$					
		All	0.8V to 2.0V			1.5		
t_{fall}	Output Fall	CLK4	2.6V to 0.8V				ns	(Note 1, 7)
		CLK2	$V_{CC} - 1.0V$ to 1.0V			2.0		
		CLK1	$V_{CC} - 1.0V$ to 1.0V					
		All	0.8V to 2.0V			1.5		
t_{SKEW}	Maximum Edge-to-Edge Output Skew	+ to + Edges + to + Edges + to + Edges	CLK1__CLK1 CLK1__CLK4 CLK2__CLK4			400 1000 1000	ps	(Note 2, 7)
t_{LOCK}	Time to Lock the Output to the Synch Input				20	100	μs	
t_{CYCLE}	Output Duty Cycle		CLK1 Outputs	49		51	%	(Note 3, 7)
			CLK2 Output	49		51		
			CLK4 Output	35		65		
J_{LT}	Output Jitter (Long Term)					0.3	ns	(Note 4, 7)
t_{PD}	Propagation Delay from XTALIN to FBKOUT			-0.3		+0.3	ns	(Notes 2, 4, 5, 6, 7)
F_{MIN}	Minimum XTALIN Frequency					15	MHz	
F_{MAX}	Maximum XTALIN Frequency					43	MHz	

Note 1: t_{rise} and t_{fall} parameters are measured at the pin of the device.

Note 2: Skew is measured at 50% of V_{CC} for CLK1 and CLK2 while it is being measured at 1.4V for CLK4. Limits are guaranteed by design.

Note 3: Output duty cycle is measured at $V_{DD}/2$ for CLK1 and CLK2 while it is being measured at 1.4V for CLK4. Limits are guaranteed by design.

Note 4: Jitter parameter is characterized and is guaranteed by design only. It measures the uncertainty of either the positive or the negative edge over 1000 cycles. It is also measured at output levels of $V_{CC}/2$. Refer to *Figure 3* for further explanation.


Note 5: Measured from the ref. input to any output pin. The length of the feedback and XTALIN traces will impact this delay time.

Note 6: This parameter includes pin-to-pin skew, longterm jitter over 1000 cycles, part-to-part variation as well as propagation delay thru the device.

Note 7: The GNDA pins of the 701 must be as free of noise as possible for minimum jitter. Separate analog ground plane is recommended for the PCB.

Also the V_{CCA} pin requires extra filtering to further reduce noise. Ferrite beads for filtering and bypass capacitors are suggested for the V_{CCA} pin.

Circuit 1. Test Circuit

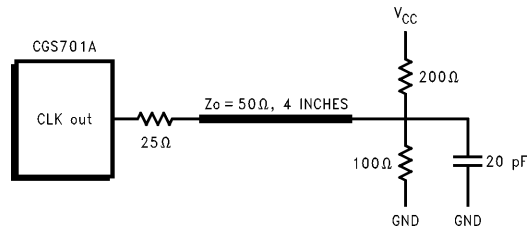

TL/F/11920-4

CGS701A

AC Electrical Characteristics (Continued)


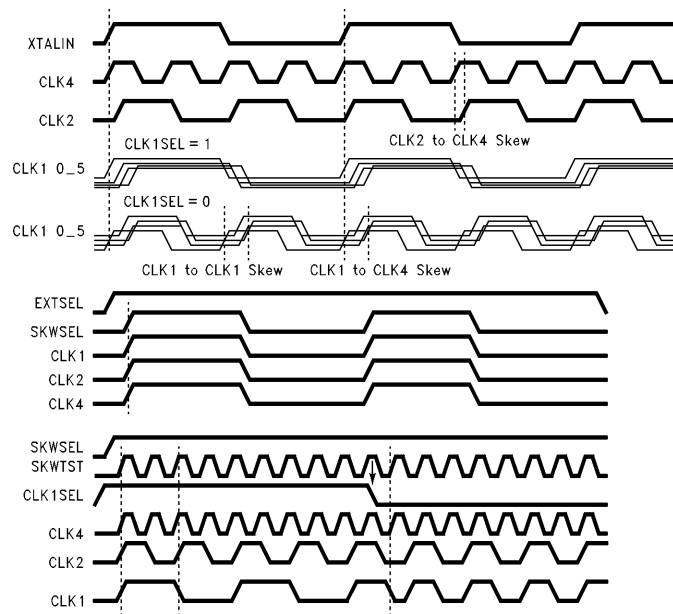


FIGURE 2. Waveforms

TL/F/11920-5

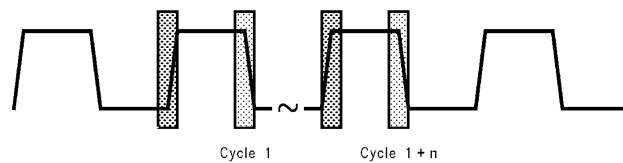

Jitter = $|\text{Period}(n) - \text{Period}(n+1)| = 300 \text{ ps}$ for either the rising or falling edge, where n is 1 to 1000 cycles.

FIGURE 3. Jitter


TL/F/11920-6

APPLICATION REFERENCES AND BIBLIOGRAPHY:

Information relating to EMI, external feedback and general application issues are in the following application notes:

- AN-968
- AN-988 (EMI Application Note)
- AN-640
- AN-991


Application Example: Cascading CGS701A

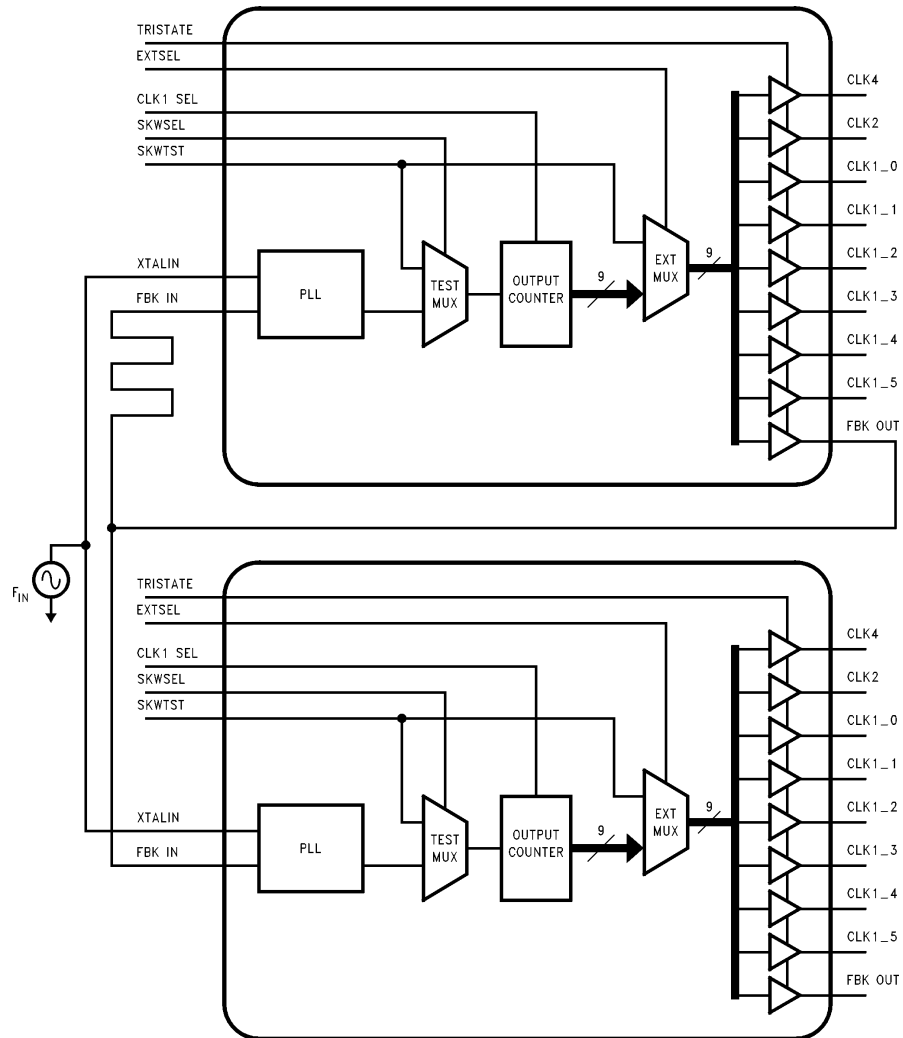

TL/F/11920-7


Application Example: External Feedback Option for the CGS701A

Any one of the 1X output clocks, (CLK1_0–CLK1_5), on the CGS701A can be used instead of the FBK OUT pin. When used in this configuration, pin 7 is a no connect and the 1X outputs can no longer be used in the 2X mode.

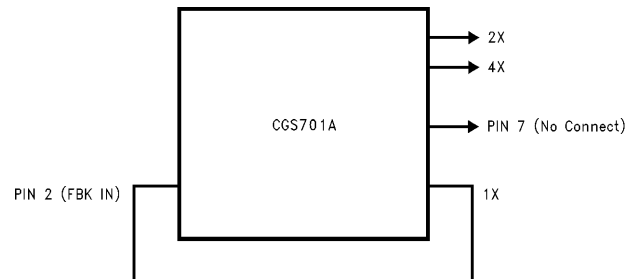


TL/F/11920-15

Ordering Information (Contact NSC Marketing for Specific Date of Availability)

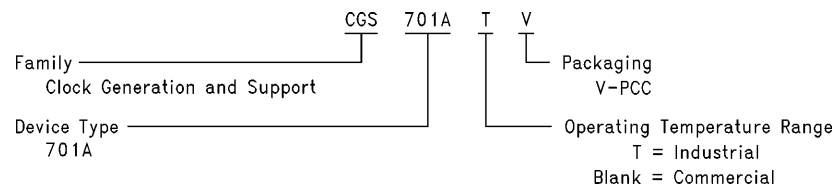



Physical Dimensions inches (millimeters) unless otherwise noted

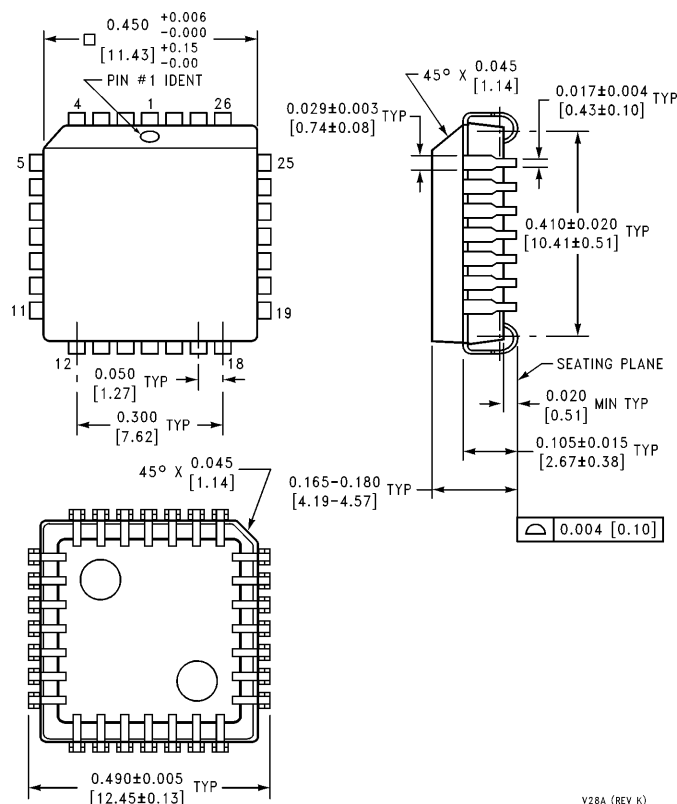

28-Lead Molded Plastic Leaded Chip Carrier
Order Number CGS701AV or CGS701ATV
NS Package Number V28A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

<http://www.national.com>

National Semiconductor Europe

Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 180-530 85 85
English Tel: +49 (0) 180-532 78 32
Français Tel: +49 (0) 180-532 93 58
Italiano Tel: +49 (0) 180-534 16 80

National Semiconductor Hong Kong Ltd.

19th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.

Tel: 81-043-299-2308
Fax: 81-043-299-2408



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.