

TRD Series

TYPICAL PERFORMANCE CHARACTERISTICS:

Contact Rating	0.4 VA Max. @ 20 VDC or peak AC 3 A @ 125 VAC or 28 VDC (2 pos.) 2A
Initial Contact Resistance	20 Milliohms max.
Contact Timing	Break-before-make
Insulation Resistance	1,000 Megohms min.
Dielectric Strength	500 Volts RMS @ sea level
Actuator Travel	23°
Life Expectancy	2 Pos. - 100,000 actuations 3 Pos. - 50,000 actuations
UL recognized under the Component Program of Underwriters Laboratories Inc. File #E46765	

NOTE: When hand soldering, solder with switch in closed position. Solder temperature 550-600°F less than 5 seconds.

NOTE: Part numbering sequence page E4



TRD21N10WL

Standard Body Color - (Black)

Model	Type	Function			Act. Code Pg. M8	Contact	Terminal	Model	Type	Function			Act. Code Pg. M8	Contact	Terminal
TRD11D1(*)WL	SPDT	On	None	On	1	Gold	Wire Lug	TRD13D1(*)WL	SPDT	On	None	On	1	Silver	Wire Lug
TRD11E1(*)WL	SPDT	On	Off	On	5	Gold	Wire Lug	TRD13E1(*)WL	SPDT	On	Off	On	5	Silver	Wire Lug
TRD11F1(*)WL	SPDT	On	None	(On)	1	Gold	Wire Lug	TRD13F1(*)WL	SPDT	On	None	(On)	1	Silver	Wire Lug
TRD21N1(*)WL	DPDT	On	None	On	2	Gold	Wire Lug	TRD23N1(*)WL	DPDT	On	None	On	2	Silver	Wire Lug
TRD21P1(*)WL	DP3T	On	Off	On	6	Gold	Wire Lug	TRD23P1(*)WL	DP3T	On	Off	On	6	Silver	Wire Lug
TRD21R1(*)WL	DPDT	On	None	(On)	2	Gold	Wire Lug	TRD23R1(*)WL	DPDT	On	None	(On)	2	Silver	Wire Lug
(*) Specify rocker color by adding suffix number: (0) Black (2) Red, (6) Blue (9) Yellow,								(On) indicates momentary position.							



TRD11D10WLLR

Standard Body and Rocker Color - (Black)

Model	Type	Function	Act. Code Pg. M8	Contact	Terminal	Model	Type	Function	Act. Code Pg. M8	Contact	Terminal				
TRD11D10WLLR(*)	SPDT	On	None	On	1	Gold	Wire Lug	TRD13D10WLLR(*)	SPDT	On	None	On	1	Gold	Wire Lug
TRD11E10WLLR(*)	SP3T	On	Off	On	5	Gold	Wire Lug	TRD13E10WLLR(*)	SP3T	On	Off	On	5	Gold	Wire Lug
TRD11F10WLLR(*)	SPDT	On	None	(On)	1	Gold	Wire Lug	TRD13F10WLLR(*)	SPDT	On	None	(On)	1	Gold	Wire Lug

(*) Specify LED color by adding suffix number: (2) Red, (4) Yellow, (5) Green, (25) Red/Green - Bi-color (On) indicates momentary position.

AUGAT Inc.

452 John L. Dietsch Blvd.
Attleboro Falls, MA 02763 USA
(508) 699-9800 FAX (800) 533-2526

TRD Series *Rocker/Paddle • How To Order*

MATERIAL SPECIFICATIONS:

Movable Contacts	Copper alloy w/silver inlay contact or gold plate
Terminals/Fixed Contacts	Copper alloy w/silver inlay contact or gold plate
Terminal Seal	Epoxy
Housing/Beveled Frame	Polyamide, black matte finish

ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature -4°F to +176°F (-20°C to +80°C)
Storage Temperature -49°F to +199°F (-45°C to +93°C)
Solder Heat Resistance Meets MIL-STD-202, method 210

TYPICAL PERFORMANCE CHARACTERISTICS:

Contact Rating	Silver: 3A max. @ 125 VAC, option 3 Gold: 0.4VA max. @ 20 VDC, option 1
Initial Contact Resistance	20 Milliohms max.
Static Withstanding	15KV, per IEC 801-2
Insulation Resistance	1,000 Megohms min. @ 500 VDC
Dielectric Strength	500 Volts RMS @ sea level
Electrical Life	2 Pos. 20K cycles @ full rated 3A load, 80K @ 0.4VA, 3 pos. 10K cycles @ full rated 3A load, 60K @ 0.4VA

***NOTICE:** Caution should be used when hand-soldering. Solder heat Resistance -550°-600°F for less than 5 seconds. Solder with the switch in the closed position.


UL recognized under the Component Program of Underwriters Laboratories Inc. File #E46765

HOW TO ORDER

See pages M2-M4 for application specific indexing.

Model	Contact Rating	Function	Actuator	Actuator Color	Terminal	Mount	L.E.D. Illumin.	L.E.D. Color	*UL
TRD1			1					☐ None	
Single Pole		Single Pole	Rocker	WL	Wire Lug		L	Option L	
TRD2			2					2	red
Double Pole		on-on	Paddle	WW	Wire Wrap		Beveled frame adaptor	4	yellow
		on-off-on		QC	Quick Connect		LR	5	green
		on-(on)	0 black	PC	Printed Circuit		Integral w/rocker (TRD 1 only)	25	bi-color red/green
		(on)-off-(on)	2 red						
		on-off-(on)	6 blue						
1		Double Pole	9 yellow						
Gold 0.4VA		on-on			☐ 15/32" round hole				Functions: Silver only
3		on-off-on							D, F, N, & R
Silver 3A		on-(on)			5 1/2" square hole				Terminations Functions only
		(on)-off-(on)							WL, WW or QC only
		on-off-(on)							

ACTUATORS

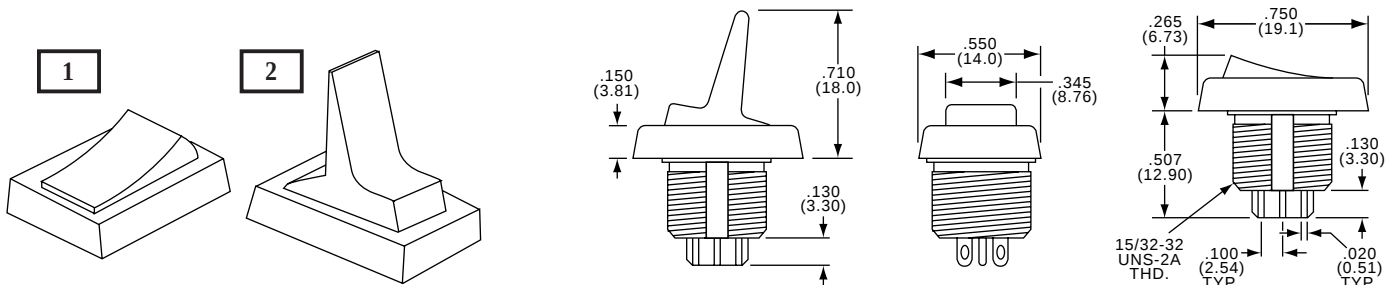


How To Order • Rocker/Paddle **TRD Series**

TERMINATIONS (Epoxy seal standard)

WL


Wire Lug



QC


Quick Connect
.110" (.020 thick)

Mates with standard
.110" female connectors




WW

Wire Wrap



PC

Printed Circuit




15/32" HOLE STANDARD

Standard TRD bushing will mount in any hole shown below.

Recommended panel thickness:
.030" to .250"

One hex nut, one internal tooth lock-washer supplied.

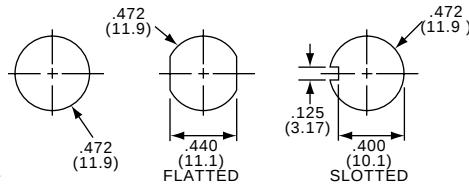


5

1/2" SQUARE CUTOUT SNAP-IN ADAPTOR

Recommended panel thickness:
.030" to .125"

Material: bright stainless steel
To specify adaptor separately, use P/N TRD10793



E

CONTACTS/RATING/UL RECOGNITION

1

0.4VA Max. @ 20 VDC

Movable Contact: Copper alloy, gold plate
Fixed Contact/Terminal: Copper alloy, gold plate

3

3A Max. @ 125 VAC

Movable Contact: Copper alloy, silver inlay
Fixed Contact/Terminal: Copper alloy, silver inlay


UL

For contact option 3
Rating: 3A, 120 VAC(Resistive)
File: E46765
Underwriters Laboratories, Inc. marking stamped under beveled frame.

L.E.D. ILLUMINATION - SINGLE AND BI-COLOR

LR

**L.E.D. Integral
(Rocker Actuator)**
All SPDT functions

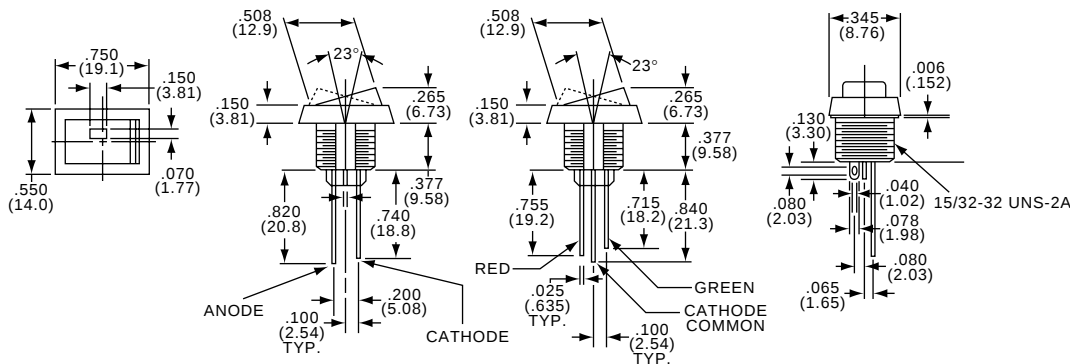

Standard mounting dimensions apply, L.E.D. supplied in **2** red, **4** yellow, **5** green, or **25** red/green.

L.E.D. Specifications: Max Voltage: 2.8 VDC

Max. Forward Current: red-20mA, Yellow-25 mA, green-25 mA, red/green-40 mA.

Need more technical information?


Consult your local Augat sales office
listed on the back cover

AUGAT Inc.
452 John L. Dietsch Blvd.
Attleboro Falls, MA 02763 USA
(508) 699-9800 FAX (800) 533-2526

TRD Series *Rocker/Paddle • How To Order*


L

L.E.D. BEVELE FRAME ADAPTOR
(Accepts rectangular L.E.D.)

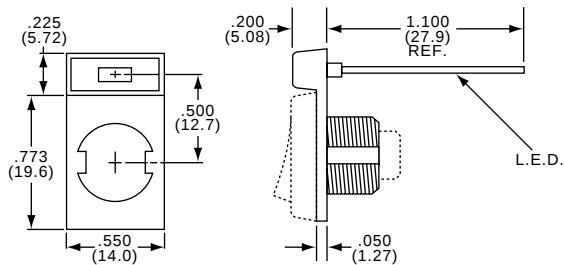

Material: Nylon 6/6
Color/Finish: Black, matte

MOUNTING

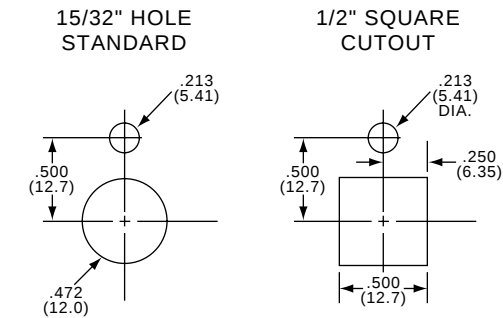

Recommended Panel
Thickness: .030 to .220:

Recommended Panel
Thickness: .030 to .095"



E

FUNCTIONS


Single Pole	Double Pole			
D	N	On	None	On
E	P	On	Off	On
F	R	On	None	(On)
G	S	(On)	Off	(On)
H	T	On	Off	(On)
SPDT Terminals Connected		2-3	---	1-2
DPDT Terminals Connected		2-3 5-6	---	1-2 4-5

- None** No mechanical position
- Off** Mechanical position, no electrical connection
- (On)** Momentary mechanical position, electrical connection

SWITCH GUARD




1. Insert switch in panel.
2. Attach lockwasher and hexnut.
3. Snap switch guard onto switch.
4. Tighten hex nut.

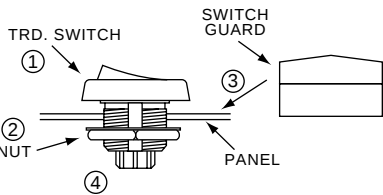

Recommended Panel Thickness:
15/32" hole standard - .030 to .220
15/32" square cutout - .030 to .095

Material: Nylon 6/6 Color/Finish: Black matte, Specify separately, P/N TRD10979

ROCKER BOOT SEAL

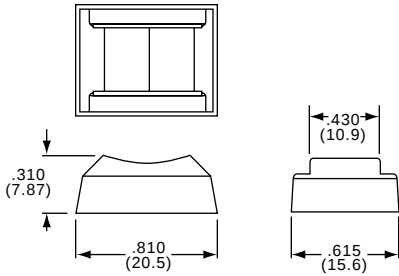

To specify boot seal use P/N TRD11494



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.