

APeX Galley Connector, Rectangular



Interchangeable and Intermateable
Overmold Technology
Blind -Mate Connection
ARINC 810 Conformity



Intermateable and interchangeable with other ARINC 810 galley connectors, Amphenol Pcd's APeX Galley Connector, Rectangular is a reliable, robust connector that uses overmold technology to set it apart from the rest.

Benefits at a Glance

Intermateable and Interchangeable

Ability to mate with other ARINC 810 galley connectors in the market

Overmold Technology

Enables exceptional sealing that improves safety and reliability

Blind-Mate Connection



Guide pin feature enables quick and simple mating

Intuitive and Ergonomic

Smooth, low insertion force to mate connector

Other APeX Rectangular Connectors

30-pin insert, Size 20



Part Number	Contact PN
APXM030PA/B	none
APXM130PA/B	CNP820100
APXM030SA/B	none
APXM130SA/B	CNS820100

Contact us for more information

Other High Performance Products



APeX Galley Connector, Circular

- Intermateable/Interchangeable
- Blind-mate connection
- Highly Reliable and Durable



Cable Solutions

- Molded Cables for Tactical Digital Communications
- Custom Molded Cables for Harsh Environments
- PRC 117F/G and PRC -152 Radio / Data Cables
- Mil-22992 Class L Heavy Duty Power Cables
- Soldier Accessories Connectors and Cables





High Performance P-Clamps

- PEEK polymer
- Non-corrosive & Non-conductive
- Overmolded silicone cushions
- Lightweight

72 Cherry Hill Drive
Beverly, MA 01915 USA
info@amphenolpcd.com
978-624-3400

Plug: APX2A801

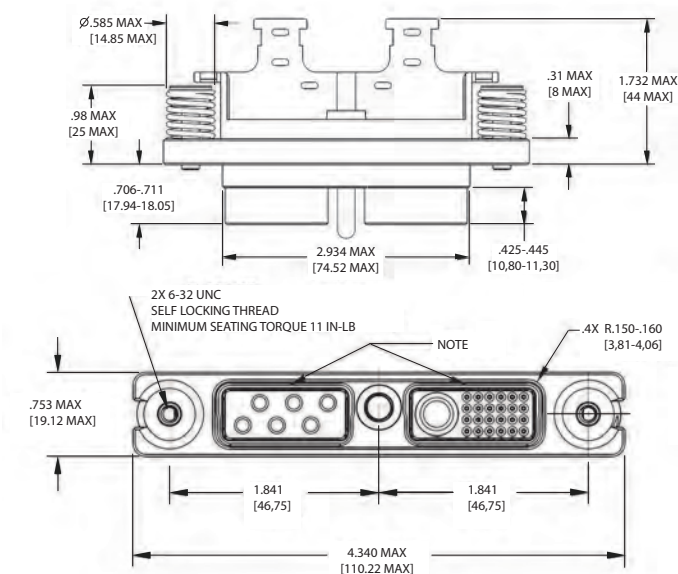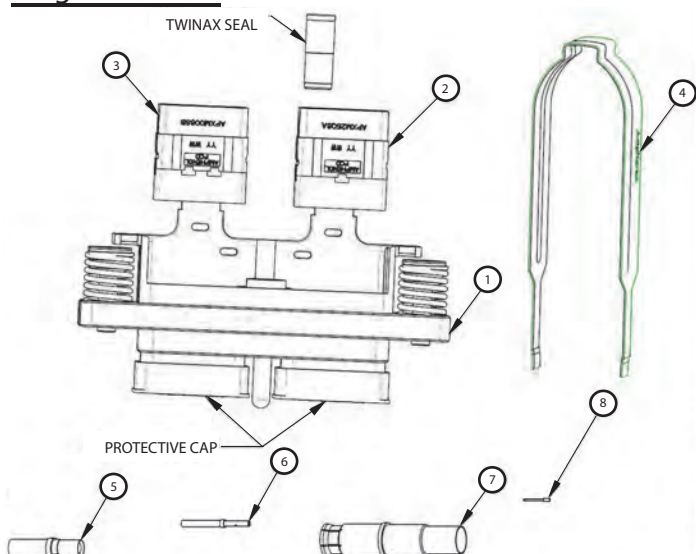



Note: socket insert installed; protective cap not shown

Item	Part	Material
1 Plug shell assembly	Strain relief	PEI thermoplastic 40% carbon fiber
	Retention nut	Stainless steel per AISI 316, passivated
	Male fastener body	Stainless steel per AISI 316, passivated
	Insert retention clip	Copper alloy per ASTM B194
	Float-mounted eyelet	Stainless steel per AISI 316, passivated
	Float-mounted spring	Stainless steel per AISI 302, passivated
	Shell	Aluminum allow 6061T651 per AMS-QQ-A-250/11, electroless nickel per Mil -C -26074 0.001 inch min
	Protective cap	EPDM elastomer per ASTM D3568
2 & 3 25 socket insert with twinax seal 6 socket insert	Housing	Polyetherimide thermoplastic per ASTM D5205
	Retention clips	PEEK thermoplastic per Mil -P -46183
	Grommet	Silicone elastomer per ASTM -D-2000
	Twinax seal housing	Polyetherimide thermoplastic per ASTM D5205
	Twinax seal grommet	Silicone elastomer per A -A-59588A class 3B
4 Insertion/Removal tool	Tool	Stainless steel per AISI 301
5 & 6 Socket contact size 12 Socket contact size 22	Body	Copper alloy per ASTM B196, gold plate per AMS2422, 50 microinches min. over nickel plate, 40 to 200 microinches per QQ -N-290
	Sleeve	Stainless steel per AISI 305 per ASTM A 580, passivated
7 Socket twinax contact size 8	Outer and Inner contacts	Copper alloy per ASTM B196, gold plated per Mil -G -45204, 50 microinch min. over nickel plate per QQ -N-290, 50 microinch min
	Shield ferrule	Brass per ASTM B453, gold plated per Mil -G -45204, 50 microinch min. over nickel plate per QQ -N-290, 50 microinch min
	Front insulator and spacer insulator	TFE thermoplastic per AMS 3651
8 Sealing plug	Sealing plug	PTFE thermoplastic per ASTM - D1710

Plug Part Numbers and Descriptions

Item	Amphenol PCD P/N	Description	Amphenol PCD KIT P/N				
			APX2A801K	APX2A801C	APX2A801G	APX2A801S1	APX2A801S2
QTY / ASSY							
1	APX2BL00N	Plug Shell Assembly with Protective Cap	1	1	1	1	1
2	APXM25QSA	25 Socket Insert Polarization A with Twinax Seal	1	1	1	1	0
3	APXM006SB	6 Socket Insert Polarization B	1	1	1	1	1
4	APXIN0001	Blank Insert	0	0	0	0	1
5	CNS812100	APeX Socket Contact Size 12	0	6	6	6	6
6	CNS822100	APeX Socket Contact Size 22	0	15	15	0	0
7	CNS882100	APeX Socket Twinax Contact Size 8	0	1	0	0	0
8	CNA032401	Sealing Plug Size 22	0	9	9	0	0

Receptacle: APX2B801

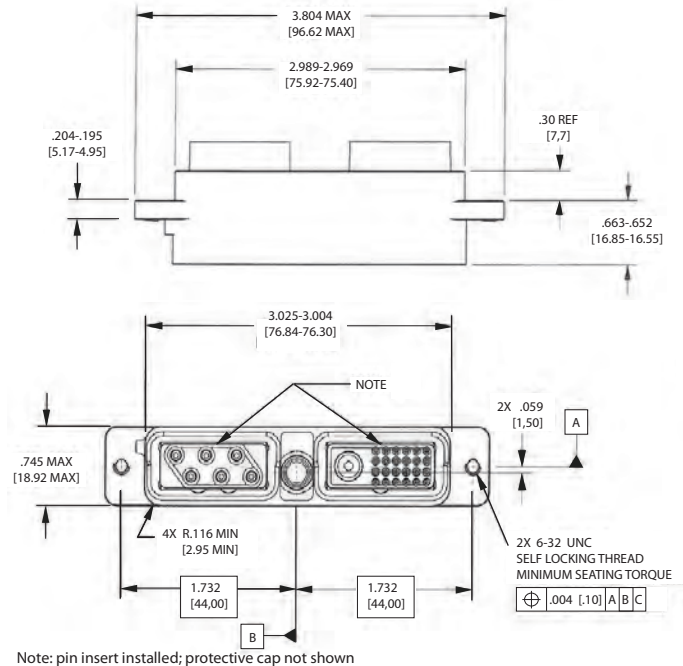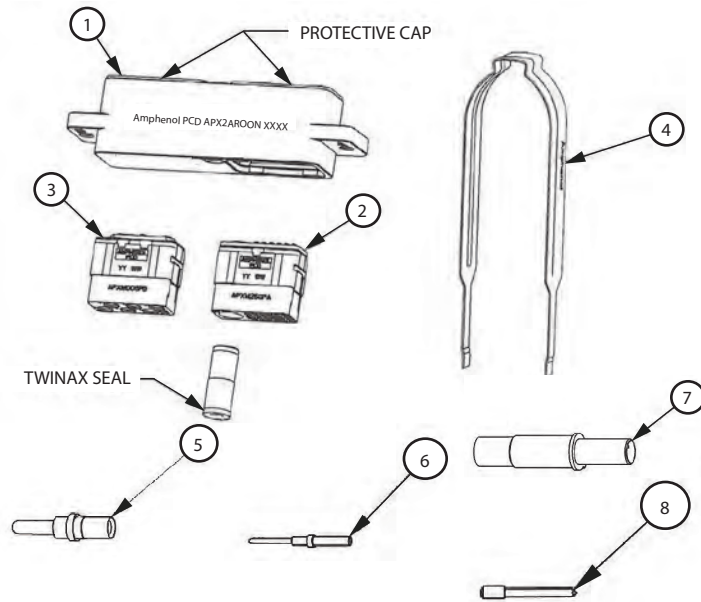

Item	Part	Material
1 Receptacle shell assembly	Shell	Aluminum alloy 6061T651 per AMS-QQ-A-250/11 electroless nickel per MIL-C-26074 .001 inch min
	Retention nut	Stainless steel per AISI 316, passivated
	Guide sleeve	Stainless steel per AISI 316, passivated
	Insert retention clip	Copper alloy per ASTM B194
	Protective cap	EPDM elastomer per ASTM D3568
2 & 3 25 pin insert with twinax seal 6 pin insert	Housing	Polyetherimide thermoplastic per ASTM D5205
	Retention clips	PEEK thermoplastic per MIL-P-46183
	Grommet	Silicone elastomer per ASTM-D-2000
	Twinax seal housing	Polyetherimide thermoplastic per ASTM D5205
	Twinax seal grommet	Silicon elastomer per A-A-59588A class 3B
4 Insertion/removal tool	Tool	Stainless steel per AISI 301
5 & 6 Pin contact size 12 Pin contact size 22	Contact	Copper alloy C97, gold plate per AMS 2422
		50 microinches min over nickel per AMS 2403
7 Pin twinax contact size 8	Outer & inner contacts	Copper alloy per ASTM B196, gold plated per Mil-G-45204
	Shield ferrule	50 microinch min. over nickel plate per QQ-N-290
	Front insulator & spacer insulator	50 microinch min.
8 Sealing plug	Sealing plug	PTFE thermoplastic per ASTM -D1710


Receptacle Part Numbers and Descriptions

Item	Amphenol PCD P/N	Description	Amphenol PCD KIT P/N				
			APX2B801K	APX2B801C	APX2B801G	APX2B801S1	APX2B801S2
1	APX2AR00N	Receptacle Shell Assembly with Protective Cap	1	1	1	1	1
2	APXM25QPA	25 Pin Insert Polarization A with Twinax Seal	1	1	1	1	0
3	APXM006PB	6 Pin Insert Polarization B	1	1	1	1	1
4	APXIN0001	Blank Insert	0	0	0	0	1
5	CNP812100	APeX Pin Contact Size 12	0	6	6	6	6
6	CNP822100	APeX Pin Contact Size 22	0	15	15	0	0
7	CNP882100	APeX Pin Twinax Contact Size 8	0	1	0	0	0
8	CNA032401	Sealing Plug Size 22	0	9	9	0	0


Cable Accommodations

Contact Size	Wire Size (AWG)	Crimping Tool	Positioner	Installing Tool	Removal Tool
22	26	M22520/2 -01	M22520/2 -23	M81969/14 -01	M81969/14 -01
	24				
	22				
12	16	M22520/1 -01	M22520/1 -02	M81969/14 -04	M81969/14 -04
	14				
	12				
8	24	Center Contacts: M22520/2 -01; Outer Body M22520/5 -01	Center Contacts: Daniels K709; Outer Body M22520/5 -45	M81969/14 -12	M81969/14 -12

Recommended Plug Panel Cutout Dimensions

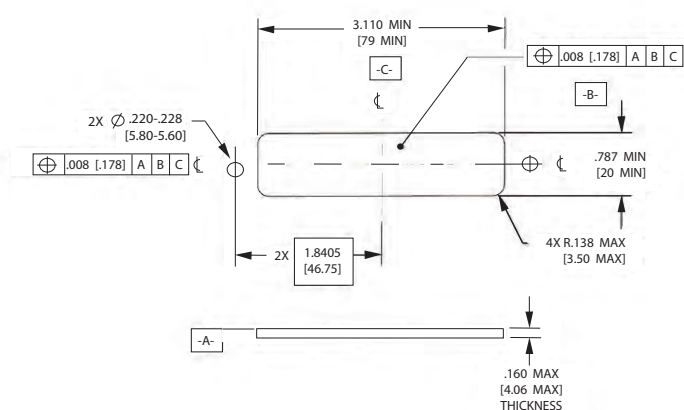

Recommended Receptacle Panel Cutout Dimensions

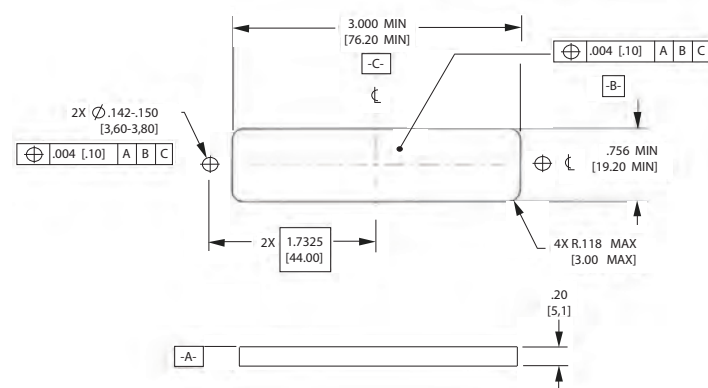

Luminus Series



The Luminus Series is lightweight, cost-effective connectors that are highly reliable and simple to use. With multiple product options to choose from, they meet MIL-T-81714, accept AS39029 and Stamped & Formed contacts, and are environmentally-sealed. Ideal for where space is limited, these innovative connectors feature a locking mechanism that ensures stability, and are suitable for blind-mating.

- Developed to MIL-T-81714
- Standard AS39029 contacts
- Environmentally sealed

- Multiple keys & configurations
- Blind-Mate connection
- Quick, Simple connection

Amphenol Pcd

72 Cherry Hill Drive
Beverly, MA 01915 USA
info@amphenolpcd.com
978-624-3400



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.