



## Main

|                               |                             |
|-------------------------------|-----------------------------|
| Range of product              | OsiSense XC                 |
| Series name                   | Standard format             |
| Product or component type     | Limit switch                |
| Device short name             | XCKD                        |
| Sensor design                 | Compact                     |
| Body type                     | Fixed                       |
| Head type                     | Multi-directional head      |
| Material                      | Metal                       |
| Body material                 | Zamak                       |
| Head material                 | Zamak                       |
| Fixing mode                   | By the body                 |
| Movement of operating head    | Multi-directional           |
| Type of operator              | Spring return cat's whisker |
| Type of approach              | Multi-directional approach  |
| Number of poles               | 2                           |
| Contacts type and composition | 1 NC + 1 NO                 |
| Contact operation             | Snap action                 |

## Complementary

|   |   |
|---|---|
| Switch actuation                                    | By any moving part  |
| Electrical connection                               | Screw-clamp terminals, clamping capacity: 1 x 0.34...2 x 1.5 mm <sup>2</sup>  |
| Cable entry   | 1 entry tapped for 1/2" NPT cable gland   |
| Contacts insulation form                            | Zb  |
| Positive opening                                    | Without   |
| Minimum torque for tripping                         | 1.15 lbf.in (0.13 N.m)  |
| Maximum actuation speed                             | 3.28 ft/s (1 m/s)   |
| Contact code designation                            | Q300, DC-13 (U <sub>e</sub> = 250 V, I <sub>e</sub> = 0.27 A) conforming to EN/IEC 60947-5-1 appendix A<br>A300, AC-15 (U <sub>e</sub> = 240 V, I <sub>e</sub> = 3 A), I <sub>th</sub> e = 10 A conforming to EN/IEC 60947-5-1 appendix A   |
| [U <sub>i</sub> ] rated insulation voltage          | 500 V degree of pollution 3 conforming to IEC 60947-1<br>300 V conforming to UL 508<br>300 V conforming to CSA C22.2 No 14  |
| Resistance across terminals                         | <= 25 MOhm conforming to IEC 60255-7 category 3   |
| [U <sub>imp</sub> ] rated impulse withstand voltage | 6 kV conforming to IEC 60664<br>6 kV conforming to IEC 60947-1  |
| Short-circuit protection                            | 10 A cartridge fuse gG  |
| Electrical durability                               | 5000000 cycles, DC-13, 120 V, 4 W, operating rate: <= 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>5000000 cycles, DC-13, 24 V, 10 W, operating rate: <= 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>5000000 cycles, DC-13, 48 V, 7 W, operating rate: <= 60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C |
| Mechanical durability                               | 5000000 cycles  |

## Environment

|                                   |   |
|-----------------------------------|---|
| shock resistance                  | 50 gn (duration = 11 ms) conforming to IEC 60068-2-27 |
| vibration resistance              | 25 gn (f = 10...500 Hz) conforming to IEC 60068-2-6   |
| IK degree of protection           | IK06 conforming to EN 50102                           |
| electrical shock protection class | Class I conforming to IEC 61140                       |

Class I conforming to NF C 20-030

|                                       |   |
|---------------------------------------|---|
| ambient air temperature for operation | -13...158 °F (-25...70 °C)  |
| ambient air temperature for storage   | -40...158 °F (-40...70 °C)  |
| protective treatment                  | TC  |
| product certifications                | CCC<br>CSA<br>UL  |
| standards                             | EN 60204-1<br>EN 60947-5-1<br>IEC 60204-1<br>IEC 60947-5-1<br>UL 508<br>CSA C22.2 No 14 |


## Offer Sustainability

|  |  |
|--|--|
| Green Premium product  | Green Premium product  |
| Compliant - since 1103 - Schneider Electric declaration of conformity  | Compliant - since 1103 - Schneider Electric declaration of conformity  |
| Reference not containing SVHC above the threshold  | Reference not containing SVHC above the threshold  |
| Need no specific recycling operations  | Need no specific recycling operations  |
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |

## Contractual warranty


|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

## Dimensions

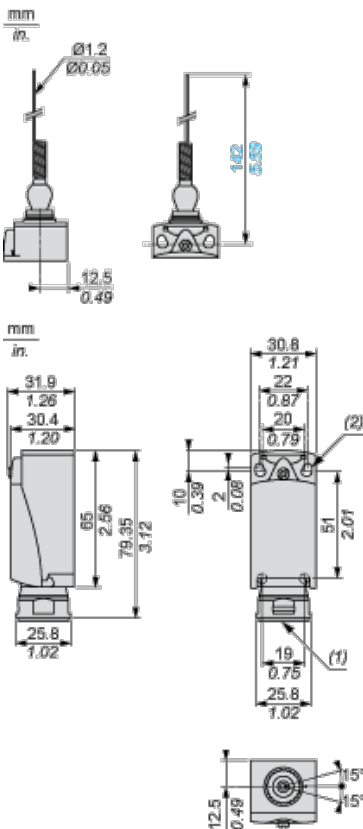

## Mounting with Cable Entry


### Position of Cable Gland

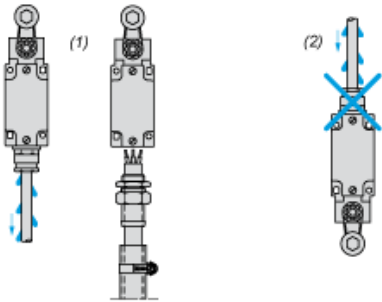

- (1) Recommended
- (2) To be avoided


## Setting-up

### Plunger or Multi-directional Heads

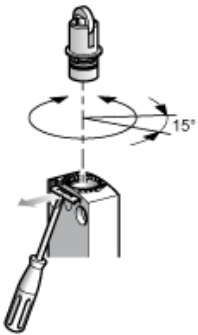


## Wiring Diagram

### 2-pole NC + NO Snap Action




## Characteristics of Actuation

### Switch Actuation by Any Moving Part



## Functionnal Diagram

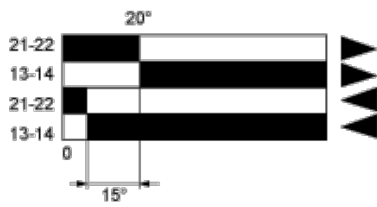

- (1) Closed
- (2) Open
- (4) Tripping
- (5) Resetting



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.