




DS60 Analog Temperature Sensor


www.maxim-ic.com

FEATURES

- Factory Calibrated for +6.25mV/°C Sensitivity with 424mV DC Offset at 0°C
- ±2.0°C Accuracy Over 0°C to +85°C Range
- Measurement Range of -40°C to +125°C
- Ultra-Low Supply Current (125µA max)
- Tiny SOT-23-3 Package
- Wide Power Supply Range (+2.7V ≤ V_{DD} ≤ +5.5V)
- Functionally-Compatible with LM60
- Applications Include Monitoring Battery Packs, Disk Drives, Printers, or any Space- or Power-Constrained Thermally Sensitive Systems.

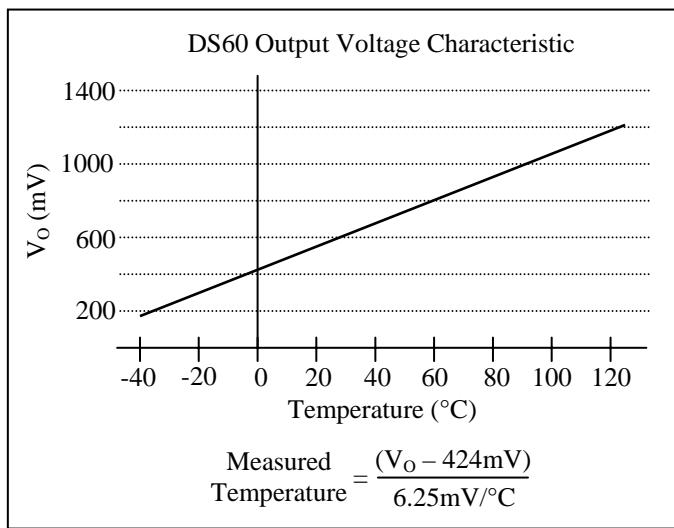

PIN ASSIGNMENT

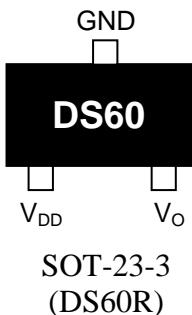

SOT-23-3
(DS60R)

Package mechanical drawings can be found at:

<http://www.maxim-ic.com/TechSupport/DallasPackInfo.htm>

PIN DESCRIPTION

V _{DD}	- Power Supply Voltage
V _O	- Sensor Output
GND	- Ground

ORDERING INFORMATION

Ordering Number	Description
DS60R/T&R	SOT-23-3: 3,000 piece Tape & Reel
DS60R-U	SOT-23-3
DS60R+T&R	Lead-Free SOT-23-3: 3000 piece Tape & Reel
DS60R+U	Lead-Free SOT-23-3

DESCRIPTION

The DS60 analog temperature sensor measures its own temperature and provides these measurements to the user in the form of an output voltage (V_O) that is proportional to degrees centigrade. The output voltage characteristic is factory-calibrated for a typical sensitivity of +6.25mV/°C and a DC offset of +424mV at 0°C. Its operating temperature range is -40°C to +125°C, corresponding to an output voltage range of +174mV to +1205mV. The DS60 has ±2.0°C accuracy over a 0°C to +85°C temperature range and over the full +2.7V to +5.5V power supply range. Its accuracy is within ±3.0°C over the operating temperature range and full supply range. Because the output voltage is positive for the entire temperature range, there is no need for a negative power supply.

The DS60's tiny size, low-current operation, and wide supply range make it ideal for use in battery-powered applications. To further reduce power dissipation, the DS60 can be powered by any logic gate

output that is capable of sourcing 125 μ A, which allows the DS60 to be switched to a zero power standby state when the gate is forced to a logic 0.

ABSOLUTE MAXIMUM RATINGS*

Voltage on V _{DD}	GND -0.3V to +6.5V
Output Current	5.0mA
Operating Temperature Range	-40°C to +125°C
Storage Temperature Range	-55°C to +150°C
ESD Susceptibility (Human Body Model)	2kV
Soldering Temperature	215°C for 60s (Vapor Phase)
	220°C for 15s (IR)

* These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

The Dallas Semiconductor DS60 is built to the highest quality standards and manufactured for long-term reliability. All Dallas Semiconductor devices are made using the same quality materials and manufacturing methods. However, the DS60 is not exposed to environmental stresses, such as burn-in, that some industrial applications require.

DC ELECTRICAL CHARACTERISTICS (-40°C to +125°C; 2.7V ≤ V_{DD} ≤ 5.5V)

PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNITS	NOTES
Supply Voltage	V _{DD}		2.7		5.5	V	1
Supply Current	I _{DD}			80	125	μ A	2
Measurement Error	T _{ERR}	0°C ≤ T _A ≤ 85°C			± 2	°C	2
		-40°C ≤ T _A ≤ 125°C			± 3		
V _O DC Offset		T = 0°C		424		mV	1, 2
Sensor Gain	ΔV/ΔT		6.0	6.25	6.5	mV/°C	2
Nonlinearity					± 0.8	°C	2, 3
Power Supply Regulation		2.7V ≤ V _{DD} ≤ 3.3V			± 2.0	mV/V	
		3.0V ≤ V _{DD} ≤ 5.5V			± 0.25	mV/V	
Sensor Drift				± 0.25		°C	4
Output Impedance					800	Ω	

NOTES:

- 1) All voltages are referenced to ground unless otherwise specified.
- 2) Specified for V_O sourcing 1.0 μ A (max).
- 3) Nonlinearity is the maximum deviation from an ideal linear slope.
- 4) Typical drift following three consecutive passes through a vapor phase process.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.