



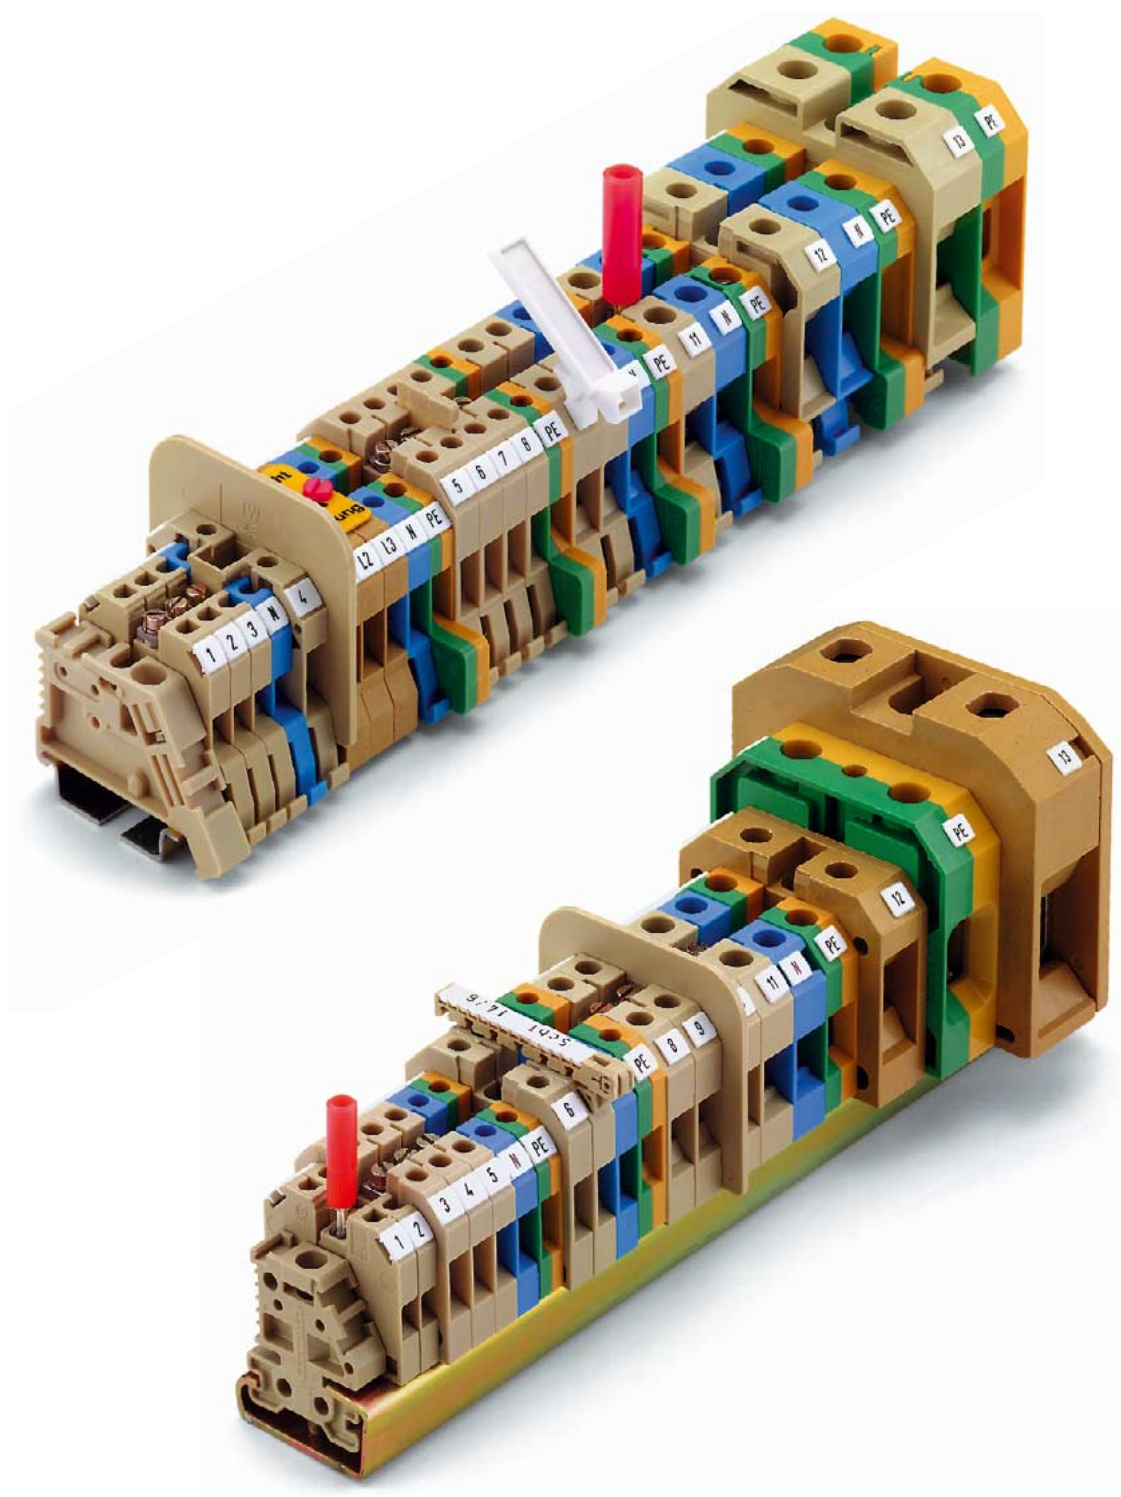

Weidmüller terminal - SAK-series- are proved in millions of applications for more than 50 years.

Available for the two rail systems TS32 and TS35, the SAK terminals are useable for every application and for all cross-sections. SAK terminals fulfill the requirements of EN 60 947-7-1.

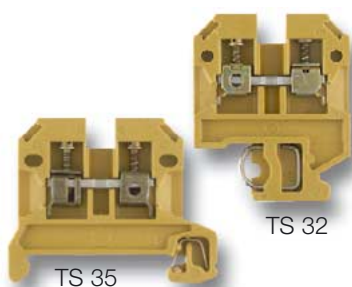


Thermosetting plastic or Thermoplastic

Terminal of thermosetting plastic are normally used in applications where high continuous service temperature and high flammability level are necessary. The Weidmüller thermosetting plastic KRG is very resistant against infection through mould and micro-organisms.

The thermoplastic material Polyamide 66 has very good electrical and mechanical properties upto 100°C. PA66 is flexible and unsusceptible to fracture, even with low temperatures.

Polyamid 66 has improved fire resistance and is self-extinguishing with flammability level V2 according to UL 94.

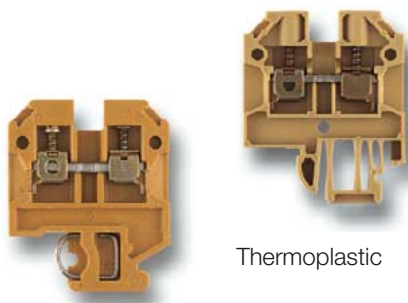

Thermosetting plastic



Cross-connection systems

40% of all terminals are cross-connected for potential branching.

Weidmüller distinguishes between the following cross-connection units for SAK-series:

- type Q pre-assembled cross-connections
- type QL permanent cross-connections
- type VL removeable cross-connection straps
- type QS removeable cross-connection plugs

Cross-connection systems from the SAK and AKZ series, type Q, QL or VL or other freely accessible live components, must be protected with appropriate covers ADP 1 or 4 or TSK 31.5 as long as they are to be inserted safe from contact.



Approvals


The following approvals apply to SAK terminals:

UL-USA
CSA-Canada
GOST-Russia
SEV-Switzerland
KEMA-Netherlands
Lloyds Register of Shipping
Germanischer Lloyd
Det Norske Veritas

SAK portfolio

- Feed-through terminals
- Protective conductor terminals
- Fuse terminals
- Disconnect-test terminals
- Feed-through terminals with tab, solder, WireWrap and Termi Point connections
- Initiator terminals, Actuator terminals
- Stud terminals

Accessories

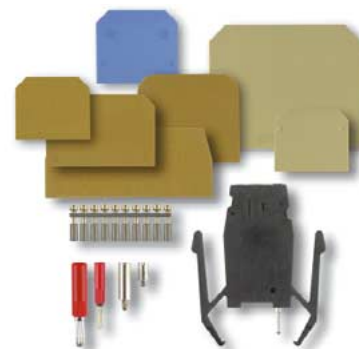

An extensive assortment of accessories is available for Weidmüller SAK terminals:

- Partitions
- Cover plates
- Small partitions
- Test plugs
- Test adapters
- Marking material
- Cross-connections and
- Covers


Positioning of end plates or partitions between cross-connections

Operating voltage	Terminal width (in mm)					
	≤ 6	≤ 8	10	12	18	22
125 V ~	AP	—	—	—	—	—
250 V ~	AP	—	—	—	—	—
380 V ~	AP	AP	—	—	—	—
440 V ~	TW	AP	AP	AP	AP	—
500 V ~	TW	TW	AP	AP	AP	—
660 V ~	TW	TW	TW	TW	TW	AP
750 V ~	TW	TW	TW	TW	TW	AP

In PA terminals small partitions (TSch) have to be used up to 380 V.

Feed-through terminals


SAK 4 SAK 4/10



DK 4 Q* DKB4 Q*/10*



DK 4 DK4/35



Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	800 V/32 A/4 mm ²
Rated impulse voltage/pollution severity	8 kV/3

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	2

Clampable conductor

Solid H07V-U	mm ²
Stranded H07V-R	mm ²
Flexible H07V-K	mm ²
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²
With/without plastic insulating collar	mm ²
Plug gauge according to 60 947-7-1	Size
Continuous current of terminal for conductor size	41 A/6 mm ²
Continuous current rating of cross-connection 2...5-pole	A
Continuous current rating of cross-connection 6...10-pole	A

Technical data

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

Ordering data

Version	Cat. No.	Qty.
KrG	0128320000	100
Blue KrG	0128370000	100
KrS	0128330000	100
PA	0128360000 ¹⁾ 2)100	
Blue PA	0128380000 ¹⁾ 2)100	
Orange PA	0105060000 ¹⁾ 2)100	
Terminal block with marking PA	0322660000 ¹⁾ 2) 10	
Terminal block without marking PA	0308860000 ¹⁾ 2) 10	

End plate (thickness mm)



Type	Cat. No.	Qty.
KrG	AP (1.5) 0117920000	20
Blue KrG	AP (1.5) 0117970000	20
KrS	AP (1.5) 0117930000	20
PA	AP (1.5) 0117960000	20
Blue PA	AP (1.5) 0117980000	20
PA		
Blue PA		

Partition (thickness mm)



KrG	TW (2.5) 0130120000	20
Blue KrG	TW (2.5) 0103170000	20
KrS	TW (2.5) 0130130000	20
PA	TW (1.5) 0130160000	20
Blue PA	TW (1.5) 0130180000	20
HP	TW (1.0) 0197100000	20

Small partition



TSch 1	0319160000	100
--------	------------	-----

Cross-connection



Q 2	0336700000	50
Q 3	0336800000	50
Q 4	0336900000	50
Q 10	0368800000	20
2-pole		
3-pole		
4-pole		

Dimensions/approvals

Width/length/height (mm)	6/54/60
Width/length/height (mm)	6/54/60.5
Insulation stripping length/clamping screw/screwdriver blade	9/M 3/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	500 V/2 x 32 A/4 mm ²
Rated impulse voltage/pollution severity	6 kV/3

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	2

Solid H07V-U	mm ²
Stranded H07V-R	mm ²
Flexible H07V-K	mm ²

Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²
With/without plastic insulating collar	mm ²
Plug gauge according to 60 947-7-1	Size

Continuous current of terminal for conductor size	32 A/4 mm ²
Continuous current rating of cross-connection 2...5-pole	32
Continuous current rating of cross-connection 6...10-pole	32

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

Continuous current rating of cross-connection 6...10-pole	32
---	----

* Accepts LS 2.8 shield lugs Cat. No. 1056400000

** 2.5 mm² conductor connection when using QB

1) Contact-proof cross-connec. with ADP 4 over profile (see "Accessories")


2) Not suitable for fuse pin SST 3

Feed-through terminals

DK4 QV*
DK4 QV/35*




SAK 6 N
SAK 6/10/35



SAK 10
SAK 10/10/35



SAK 16
SAK 16/35



Dimensions/approvals							
Width/length/height (mm)	with TS 32	6/54/60	8/40/51.5	10/40/51.5	12/50/57.5		
Width/length/height (mm)	with TS 35 x 7.5	6/54/60.5	8/45/44	10/45/44	12/50/50		
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6	12 mm/M 3.5/4.0 x 0.8	12 mm/M 4/5.5 x 1.0	15 mm/M 4/5.5 x 1.0		
Rated data according to IEC 60 947-7-1							
Rated voltage/current/cross-section		500 V/32 A/4 mm ²	800 V/41 A/6 mm ²	800 V/57 A/10 mm ²	1000 V/76 A/16 mm ²		
Rated impulse voltage/pollution severity		6 kV/3	8 kV/3	8 kV/3	8 kV/3		
Further technical data							
Tightening torque range	Nm	0.5...1.0	0.8...1.6	1.2...2.0 ³⁾	1.2...2.4		
Torque setting with electric screwdriver type DMS 2		2	3	4	4		
Clampable conductor							
Solid H07V-U	mm ²	0.5...4	0.5...10	1.5...10	2.5...10		
Stranded H07V-R	mm ²	0.5...4	0.5...6	2.5...16	4...16 ²⁾		
Flexible H07V-K	mm ²	0.5...4	0.5...10	1.5...10	4...16		
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ²						
With/without plastic insulating collar	mm ²	0.5...4	0.5...6	1.5...10	4...16		
Plug gauge according to 60 947-7-1	Size	A 3	A 5	B 6	B 6		
Continuous current of terminal for conductor size		32 A/4 mm ²		76 A/16 mm ²			
Continuous current rating of cross-connection 2...5-pole	A	32	41	57	76		
Continuous current rating of cross-connection 6...10-pole	A	32					
Rated data according to UL/CSA							
Voltage/current/conductor size	UL	300 V/27 A/22...12 AWG	600 V/40 A/22...8 AWG	600 V/60 A/14...6 AWG ³⁾	600 V/80 A/12...4 AWG		
Voltage/current/conductor size	CSA	300 V/10 A/26...12 AWG	600 V/47 A/20...8 AWG	600 V/65 A/14...6 AWG ³⁾	600 V/87 A/10...4 AWG		
Ordering data		Version	Qty.	Qty.	Qty.		
		KrG					
		Blue KrG					
		KrS					
		PA					
		Blue PA					
		Orange PA					
		Terminal block with marking					
		Terminal block without marking					
End plate (thickness mm)		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
AP	KrG				AP (1.5)	0117920000	20
	Blue KrG				AP (1.5)	0117970000	20
	KrS				AP (1.5)	0117930000	20
	PA	AP (1.5)	1397160000	20	AP (1.5)	0117960000	20
	Blue PA	AP (1.5)	1397180000	20	AP (1.5)	0117980000	20
Partition (thickness mm)		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
TW	KrG				TW (1.5)	0130120000	20
WTW	Blue KrG				TW (1.5)	0130130000	20
Small partition	KrS				TW (1.5)	0130160000	20
	PA	WTW (Ex)	1058800000	20	TW (1.5)	0130180000	20
	Blue PA				TW (1.5)	0197100000	20
		TW (2.0)	0607000000	20	TW (1.5)	0197100000	20
		TSch 6	0190260000	100	TSch 1	0319160000	100
Cross-connection		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
Q 4	2-pole	Q 2	0336400000	50	Q 2	0456700000	50
QB 4	3-pole	Q 3	0336500000	50	Q 3	0456800000	50
	4-pole	Q 4	0336600000	50	Q 4	0456900000	50
	10-pole	Q 10	0368600000	20	Q 10	0457000000	20
		QB 2	0482700000**	100			
		QB 3	0482800000**	50			
		QB 4	0482900000**	50			
Cover		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
		AD 4	0303400000	50	AD 4	0196600000	50
		BSK M 2.5 x18			BSKM3x22	0128900000	100
			0303300000	100			
Switchable cross-connection link		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
VL 2	VL 2	VL 2	04467000000	50	VL 2	0135900000	50
BS	BS	VH	10565000000	100	VH	0285100000	50
VH	VH	BS	03431000000	100	BS	0292500000	100
Marking tags		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
		DEK			DEK 6	see "Accessories"	
		Standard			DEK 8	see "Accessories"	
					DEK 5	see "Accessories"	
					DEK 5	see "Accessories"	
Mounting rails, end brackets, further marking material see "Accessories"							

* Accepts LS 2.8 shield lugs Cat. No. **1056400000**

** 2.5 mm² conductor connection when using QB

¹⁾ Contact-proof with ADP 4 cover profile (see section "Accessories")

²⁾ Tightening torque for 16 mm² stranded: 2 Nm

³⁾ Tightening torque for 16 mm² and AWG6: 2 Nm

Feed-through terminals

	SAK 35 N SAK 35 N/35	SAK 35 SAK 35/35	SAK 70 SAK 70/35	SAK 95 SAK 95/35
				
Dimensions/approvals	 DNV	 DNV	 DNV	 DNV
Width/length/height (mm) with TS 32	16/58/67.5	18/58/67.5	22/75/79.5	28/83.5/100.5
Width/length/height (mm) with TS 35 x 7.5	16/63/60	18/58/60	22/75/87	28/83.5/96.5
Insulation stripping length/clamping screw/screwdriver blade	18 mm/M 6/6.5 x 1.2	20 mm/M 6/6.5 x 1.2	24 mm/M 8/5 D 911	30 mm/M 10/8 S D 6911
Rated data according to IEC 60 947-7-1				
Rated voltage/current/cross-section	1000 V/125 A/35 mm ²	800 V/125 A/35 mm ²	1000 V/192 A/70 mm ²	1000 V/232 A/95 mm ²
Rated impulse voltage/pollution severity	8 kV/3	8 kV/3	8 kV/3	8 kV/3
Further technical data				
Tightening torque range	Nm 4.0...5.0/4.0...6.0***	4.0...5.0/4.0...6.0***	6.0...12.0	10.0...20.0
Torque setting with electric screwdriver type DMS 2				
Clampable conductor			Strips	Strips
Solid H07V-U	mm ² 2.5...16	6...16	16 3x9x0.8	10...16 3x9x0.8
Stranded H07V-R	mm ² 2.5...50	16...50	16...70 ¹⁾ 6x9x0.8	10...120 ²⁾ 6x9x0.8
Flexible H07V-K	mm ² 2.5...35	10...35	16...70 ¹⁾ 6x13x0.5	10...95 ²⁾ 6x13x0.5
Flexible H07V-K and ferrule according to DIN 46 228/1	mm ² 2.5...35	10...35	16...35	10...35 6x16x0.8
Plug gauge according to 60 947-7-1	Size B 8	B 9	B 11	B 12
Continuous current of terminal for conductor size	125 A/35 mm ²	125 A/35 mm ²	192 A/70 mm ²	232 A/95 mm ²
Continuous current rating of cross-connection 2...5-pole	A 65	99	180	180
Continuous current rating of cross-connection 6...10-pole	A 65	99		
Rated data according to UL/CSA				
Voltage/current/conductor size	UL 600 V/100 A/12...2 AWG	600 V/100 A/6...2 AWG	600 V/145 A/4...2/0 AWG	600 V/190 A/6...3/0 AWG
Voltage/current/conductor size	CSA 600 V/120 A/12...2 AWG	600 V/145 A/6...2 AWG	600 V/150 A/4...2/0 AWG	600 V/260 A/6...3/0 AWG
Ordering data	Version Qty.  Qty.	Qty.  Qty.	 VPE  Qty.	 Qty.  Qty.
KrG	0550620000 20 0608220000 20	0303520000 20		
Hexagon socket KrG	0555720000 20 0608320000 20	0476520000 20	0340820000 10	0550520000 10 0662220000 10
Hexagon socket Blue KrG	0608370000 20		0340870000 10	
KrS	0550630000 20	0303530000 20		
Hexagon socket KrS	0555730000 20		0340830000 10	
PA	0550660000 20 0608260000 20	0303560000 20 0380760000 20		
Hexagon socket PA	0555760000 20 0608360000 20	0476560000 20 0582460000 20	0139160000 10	
Blue PA		0303580000 20 0380780000 20		
End plate (thickness mm)	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
KrG	AP (3.0) 0303620000 10	AP (3.0) 0303620000 10	AP (4.0) 0340920000 10	AP (3.0) 0550920000 10
Blue KrG	AP (3.0) 0303670000 10	AP (3.0) 0303670000 10		AP (3.0) 0550970000 10
KrS	AP (3.0) 0303630000 10	AP (3.0) 0303630000 10	AP (4.0) 0340930000 10	
PA	AP (1.5) 0303660000 10	AP (1.5) 0303660000 10	AP (2.0) 0340960000 10	
Blue PA	AP (3.0) 0303680000 10	AP (3.0) 0303680000 10		
Orange PA				
Partition (thickness mm)				
KrG	TW (3.0) 0304320000 10	TW (3.0) 0304320000 10		
Blue KrG				
KrS	TW (3.0) 0304330000 10	TW (3.0) 0304330000 10		
PA	TW (1.5) 0304360000 10	TW (1.5) 0304360000 10		
Blue PA				
Cross-connection				
QL 3 VH BS SS 2-pole	QL 2 0564900000 50	QL 2 0123600000 20	QL 2 0345300000 20	QL 2 0551200000 10
3-pole	QL 3 056			


SAK-series

Feed-through terminals for thermocouples

Busbars made from thermocouple materials according to DIN IEC 584

SAK 2.5 TC


DK 4 Q/TC



Weidmüller's **thermocouple-terminals** are specially designed for transmitting the smallest voltages in temperature measuring circuits. Special busbars ensure that no false signals occur in the terminal when temperature differences exist in the positive and negative path.

This high measuring precision is necessary for, e.g. test beds, air craft engines, for complicated chemical processes, controls, etc.

I. Configuration of a temperature measuring circuit



- 1 Thermocouple (sensor) 4 Reference point
2 Thermocouple terminals 5 Supply conductors (to and from)
3 Compensation conductor 6 Measuring device

The thermocouple terminals displayed in this measurement circuit are used to thermoelectrically transmit thermal e.m.f. of the thermocouple to the reference point and indicating device via the thermocouple.

Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Technical data/VDE

Rated voltage/current/cross-section

Tightening torque range

Nm

6/36.5/49.5

10 mm/M 2.5/3.5 x 0.6

~/2.5 mm²

0.4...0.6

6/54/59.5

6/54/60.5

9 mm/M 3/3.5 x 0.6

~/4 mm²

0.5...1

Ordering data

Version Type

NiCr

Ni

CuNi

Fe

Cu

NiCr/Ni

Cu/CuNi

Fe/CuNi

Cat. No.

Qty.

0107260000

100

0107160000

100

0189860000

100

0190060000

100

0189960000

100

1284160000

100

1285660000

100

1284060000

100

End plate (thickness mm)



KrG

Blue KrG

KrS

PA

Blue PA

Orange PA

Type

Cat. No.

Qty.

AP (1.5)

0279560000

20

AP (1.5)

1397160000

20

Partition (thickness mm)



KrG

Blue KrG

KrS

PA

WEM

for TS 32 HP

Type

Cat. No.

Qty.

TW (1.5)

0302860000

20

TW (Ex)e

1058800000

20

TW HP (2.0)

0607000000


20

II. Symbols

Thermocouples according to IEC 584 DIN 43710

Terminal	Busbar material trade name
a) Type J	
Fe (positive leg)	Iron
CuNi (negative leg)	Constantan
b) Type T	
Cu (positive leg)	Copper
CuNi (negative leg)	Constantan
c) Type K	
NiCr (positive leg)	Chromel
Ni (negative leg)	Alumel

Marking tags



DEK

Print

Standard

DEK 6

see "Accessories"










































DEK 6

see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

SAK-series

Feed-through terminals

	SAKG 70 II G SAKG 70/35 II G	SAKG 40 I SAKG 40/35 I	SAKG 40 II SAKG 40/35 II	SAKG 40 II G SAKG 40/35 II G
				
Dimensions/approvals	 DNV		 DNV	
Width/length/height (mm) with TS 32 	32/84/54	40/95/84	40/90/53	40/90/55
Width/length/height (mm) with TS 35 x 7.5 	32/84/53	46/95/85.5	46/90/53	46/90/55
Insulation stripping length/clamping screw/screwdriver blade	~M 8/-	27 mm/M 10/-	~M 10/-	~M 10/-
Rated data according to IEC 60 947-7-1				
Rated voltage/current/cross-section	1000 V*/192 A/70 mm ²	1000 V*/232 A/95 mm ²	1000 V*/232 A/95 mm ²	1000 V*/232 A/95 mm ²
Rated impulse voltage/pollution severity	8 kV/3	8 kV/3	8 kV/3	8 kV/3
Further technical data				
Tightening torque range Nm	6...12	10...20	10...20	10...20
Torque setting with electric screwdriver type DMS 2				
Clampable conductor				
Solid H07V-U mm ²		10...95		
Stranded H07V-R mm ²		10...95		
Flexible H07V-K mm ²		10...95		
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²		10...35		
Plug gauge according to 60 947-7-1 Size		B 12		
Continuous current of terminal for conductor size	192 A/90 mm ²	232 A/95 mm ²	232 A/95 mm ²	232 A/95 mm ²
Continuous current rating of cross-connection 2...5-pole A	(QL 2) 192	(QL 2) 232	(QL 2) 232	(QL 2) 232
Continuous current rating of cross-connection 6...10-pole A				
Rated data according to UL/CSA				
Voltage/current/conductor size UL		600 V/195 A/4/0 AWG	600 V/230 A/4/0 AWG	600 V/230 A/4/0 AWG
Voltage/current/conductor size CSA	600 V/200 A/2/0...4/0 AWG	600 V/250 A/2/0...4/0AWG	600 V/250 A/2/0...4/0 AWG	600 V/250 A/2/0...4/0 AWG
Ordering data Version	KrG			
	 Cat. No. Qty.  0150420000 10 0636620000 10	 Cat. No. Qty.  0286820000 10 0637520000 5	 Cat. No. Qty.  0170520000 10 0637720000 5	 Cat. No. Qty.  0185220000 10 0637820000 5
End plate, hard paper (thickness mm)	 0205100000, 0180500000 0205200000, 0180600000 tropic-proof	 Cat. No. Qty.  EP 1 (2) 0205100000 10 EP 1 (2) 0205200000 10	 Cat. No. Qty.  EP 2 (2) 0205300000 10 EP 2 (2) 0205400000 10	 Cat. No. Qty.  EP 2 (2) 0205300000 10 EP 2 (2) 0205400000 10
 0180700000, 0205300000 0180800000, 0205400000 tropic-proof	 Cat. No. Qty.  EP 1/35 (2) 0180500000 10 EP 1/35 (2) 0180600000 10	 Cat. No. Qty.  EP 2/35 (2) 0180700000 10 EP 2/35 (2) 0180800000 10	 Cat. No. Qty.  EP 2/35 (2) 0180700000 10 EP 2/35 (2) 0180800000 10	
Partition, hard paper (thickness mm)	 0151400000 0164600000 tropic-proof	 Cat. No. Qty.  TW 1 (2) 0151400000 10 TW 1 (2) 0164600000 10	 Cat. No. Qty.  TW 2 (2) 0177100000 10 TW 2 (2) 0179900000 10	 Cat. No. Qty.  TW 2 (2) 0177100000 10 TW 2 (2) 0179900000 10
 0177100000 B/L/H (incl. TS 32) mm 0179900000 B/L/H (incl. TS 35) mm	 Cat. No. Qty.  2/120/75.5 2/120/75.5	 Cat. No. Qty.  2/160/90.5 2/160/90.5	 Cat. No. Qty.  2/160/90.5 2/160/90.5	
Cross-connection	 2-pole, QL 2 3-pole, QL 3 4-pole, QL 4	 Cat. No. Qty.  0194000000 10 0194100000 10 0211400000 10 0263500000 10 0444900000 10 0409800000 10 0445000000 10	 Cat. No. Qty.  0194100000 10 0211400000 10 0263500000 10 0444900000 10 0409800000 10 0445000000 10	 Cat. No. Qty.  0194100000 10 0211400000 10 0263500000 10 0444900000 10 0409800000 10 0445000000 10
Cover	 AH 32 0326760000 5	 AH 40 0326860000 5	 AH 40 0326860000 5	 AH 40 0326860000 5
Marking tags	 1 2 3 4 5 6 DEK Standard	 DEK 5 see "Accessories"	 DEK 5 see "Accessories"	 DEK 5 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"				

*During conductor connection, observe clearance and creepage distances. Insert partitions if necessary.

Feed-through terminals

SAKG 40 III
SAKG 40/35 III



			
40/100/84			
46/100/85,5			
27 mm/M 10/-			
1000 V~/232 A/95 mm ²			
8 kV/3			
10...20			
10...95			
10...95			
10...95			
10...35			
B 12			
232 A/95 mm ²			
600 V/195 A/4/0 AWG			
600 V/230 A/2/0...4/0 AWG			
	Qty.		Qty.
0286920000 10 0637620000 5			
	Cat. No.	Qty.	
EP 2 (2)	0205300000	10	
EP 2 (2)	0205400000	10	
	Cat. No.	Qty.	
EP 2/35 (2)	0180700000	10	
EP 2/35 (2)	0180800000	10	
	Cat. No.	Qty.	
TW 2 (2)	0177100000	10	
TW 2 (2)	0179900000	10	
2/160/90,5			
2/160/90,5			
AH 40			
0326860000		5	
DEK 5			
see "Accessories"			

SAKG 46 II
SAKG 46/35 II




		
46/106/55		
46/106/54.5		
-/M 12/-		
1000 V/309 A/150 mm ²		
8 kV/3		
14...31		
309 A/150 mm ²		
600 V/285 A/4/0 AWG		
600 V/365 A/300 MCM		
	Qty.	
0170620000 10 0637920000 5		
	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10
	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10
	Qty.	
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10
2/160/90.5		
2/160/90.5		
QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5
AH 46	0326960000	5
DEK 5	see "Accessories"	

SAKG 46 II G
SAKG 46/35 II G




DNV		
46/106/57.5		
46/106/57		
-/M 12/-		
1000 V/309 A/150 mm ²		
8 kV/3		
14...31		
309 A/150 mm ²		
(QL 2) 309		
600 V/285 A/4/0 AWG		
600 V/365 A/300 MCM		
	Qty.	 Qty.
0185320000	10	0638020000 5
	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10
	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10
	Qty.	
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10
2/160/90.5		
2/160/90.5		
QL 2	0247000000	5
QL 3	0444400000	5
QL 4	0444500000	5
AH 46	0326960000	5
DEK 5	see "Accessories"	

SAKG 54 II
SAKG 54/35 II



		
54/122/57		
54/122/57		
-/M 16/-		
1000 V/415 A/240 mm ²		
8 kV/3		
25...60		
415 A/240 mm ²		
(QL 2) 415		
600 V/380 A/500 MCM		
600 V/600 A/300...500 MCM		
	Qty.	 Qty.
0170720000	10	0638120000 5
	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10
	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10
	+	 Qty.
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10
2/160/90.5		
2/160/90.5		
QL 2	0264400000	5
QL 3	0408000000	5
QL 4	0247400000	5
DEK 5		
see "Accessories"		

SAKG 54 II G
SAKG 54/35 II G



 DNV		
54/122/60		
54/122/60		
~M 16/-		
1000 V*/415 A/240 mm ²		
8 kV/3		
25...60		
415 A/240 mm ²		
(QL 2) 415		
600 V/380 A/500 MCM		
600 V/600 A/300...500 MCM		
	Qty.	 Qty.
0185420000	10	0638220000
EP 2 (2)		
	Cat. No.	Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10
EP 2/35 (2)		
	Cat. No.	Qty.
EP 2/35 (2)	0180700000	10
EP 2/35 (2)	0180800000	10
TW 2 (2)		
	Cat. No.	Qty.
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10
2/160/90.5		
2/160/90.5		
QL 2		
QL 2	0264400000	5
QL 3	0408000000	5
QL 4	0247400000	5
DEK 5		
see "Accessories"		

SAKG 46/I AL
SAKG 46/II AL





46/112/74		
23 mm/M 12/M 14/-		
1000 V*/309 A/150 mm ²		
8 kV/3		
14...31/25...40		
50...240		
35...185		
		
Qty.		Qty.
1287920000** 5		
		
Cat. No.		Qty.
EP 2 (2)	0205300000	10
EP 2 (2)	0205400000	10
		
Cat. No.		Qty.
		
Qty.		
TW 2 (2)	0177100000	10
TW 2 (2)	0179900000	10
2/160/90.5		
2/160/90.5		
QL 2	0194000000	5
QL 3	0441500000	5
QL 4	0441600000	5
AH 46	0326960000	5
DEK 5 see "Accessories"		

SAK-series

** Suitable for connection of 1 aluminium conductor of max 185 mm²

*** Suitable for connection of 2 aluminium conductors of max.
185 mm²

Stud terminals

				SS 6 SS 6/35	KST 5 KST 5/35	KST 6 KST 6/35	KST 8 KST 8/35
							
Dimensions/approvals							
Width/length/height (mm) with TS 32				18/40/62	24/60/55	24/60/62	24/60/72
Width/length/height (mm) with TS 35 x 7.5				18/49.5/54.5	24/62.5/49.5	24/62.5/54.5	24/62.5/64.5
Insulation stripping length/clamping screw/screwdriver blade				-/M 6/-	-/M 5/-	-/M 6/-	-/M 8/-
Rated data							
Rated voltage/current/cross-section				1000 V ¹⁾ /76 A/16 mm ²	1000 V ¹⁾ /57 A/10 mm ²	1000 V ¹⁾ /76 A/16 mm ²	1000 V ¹⁾ /125 A/35 mm ²
Rated impulse voltage/pollution severity				6 kV/3	8 kV/3	8 kV/3	8 kV/3
Further technical data							
Tightening torque range Nm				3...6	2...4	3...6	6...12
Torque setting with electric screwdriver type DMS 2							
Clampable conductor							
Solid H07V-U mm ²							
Stranded H07V-R mm ²							
Flexible H07V-K mm ²							
Flexible H07V-K and ferrule according to DIN 46 228/1 mm ²							
Plug gauge according to 60 947-7-1 Size							
Continuous current of terminal for conductor size				82 A/16 mm ²	65 A/10 mm ²	82 A/16 mm ²	135 A/35 mm ²
Continuous current rating of cross-connection 2...5-pole A						200	200
Continuous current rating of cross-connection 6...10-pole A							
Rated data according to UL/CSA							
Voltage/current/conductor size UL				600 V/85 A/12...4 AWG	600 V/50 A/12...6 AWG	600 V/65 A/12...6 AWG	600 V/115 A/12...2 AWG
Voltage/current/conductor size CSA				600 V/65 A/6 AWG			
Ordering data							
Version							
KrG				0498220000 25 0649820000 25			
PA					9503370000 25		9501320000 25
PPO							
KrG							
for TS 35 x 7.5 PA					9508230000 25	9506940000 25	9506950000 25
for TS 35 x 15/2.3 PA					9528300000 25	9528310000 25	9528320000 25
Partition, (thickness mm)							
PA				Cat. No. Qty. TW SS6 (TS32) 0455860000 10			
Hard paper				TW-HW 2/TS35 0607100000 20			
HM					TW right 1718530000 10 TW left 2) 1752800000 10	TW right 1718530000 10 TW left 1752800000 10	TW right 1718530000 10 TW left 1752800000 10
HM							
Width/length/height (incl. TS 32) mm				2/129/93	2/160/83.5	2/160/83.5	2/160/83.5
Width/length/height (incl. TS 35) mm				2/70/62.5	2/160/78.5	2/160/78.5	2/160/78.5
Cross-connection							
2-pole				QL 2 0284300000 20	QL 2 9503390000 1	QL 2 9501350000 5	QL 2 9501360000 1
3-pole				QL 3 0279000000 20			
Marking tags							
Print							
1 2 3 4 5 6 DEK Standard DEK 5 see "Accessories"					DEK 5 see "Accessories"	DEK 5 see "Accessories"	DEK 5 see "Accessories"
Mounting rails, end brackets, further marking material see "Accessories"							


* Depends on cable lug

¹⁾ with partition

²⁾ Left AP is required only once at beginning of terminal strip

Stud terminals

KST 10
KST 10/35



	
34/60/82	34/60/82
34/62.5/74.5	34/62.5/74.5
-/M 10/-	-/M 12/-
1000 V ¹⁾ /192 A/70 mm ²	1000 V ¹⁾ /232 A/95 mm ²
8 kV/3	8 kV/3
10...20	14...31
207 A/70 mm ²	250 A/95 mm ²
200	200
600 V/175 A/12...2/0	600 V/200 A/12...3/0
 Qty.  Qty.	 Qty.  Qty.
9501330000 20	
9506960000 20	9506970000 20
9528330000 20	9528340000 20
 + 	 + 
TW right 1718530000 10	TW right 1718530000 10
TW left 1752800000 10	TW left 1752800000 10
2/160/83.5	2/160/83.5
2/160/78.5	2/160/78.5
QL 2 9501370000 1	QL 2 9501380000 1
DEK 5 see "Accessories"	DEK 5 see "Accessories"

PE terminals

138 **Weldmüller**

PE terminals

EK 16
EK 16/35



12/50/57.5
12/56/50
16 mm/M 4/5.5 x 1.0
-/-/16 mm²

1.2...2.4/0.8...1.0*

2.5...16

2.5...16

2.5...16

4...16

12...6

B 6

Qty.	Qty.
0374660000 50	0190160000 50

Type	Cat. No.	Qty.
SH 2	0494920000	10

DEK 5 see "Accessories"

EK 35**
EK 35/35



18/58/67.5
16/58/60
20 mm/M 6/6.5 x 1.2
-/-/35 mm²

2.5...5.0/ **

6...16

16...50

10...35

10...35

10...2

B 9

Qty.	Qty.
0354760000 20	0661460000 20

Type	Cat. No.	Qty.
SH 2	0494920000	10

DEK 5 see "Accessories"

EK 2



10/52/38
14 mm/M 4/-
-/-/10

1.2...2.4/2.0...4.0*

1.5...10

1.5...10

1.5...10

1.5...10

16...8

B 6

Qty.
0323100000 20

Type	Cat. No.	Qty.
------	----------	------

SAKE 35



14/46/39
16 mm/M 6/-
-/-/35 mm²

2.5...5.0/2.0...4.0*

6...35

6...35

6...16

10...35


8...2

B 8

Qty.	Qty.
0144400000 20	

Type	Cat. No.	Qty.
SH 2	0494920000	10

SAKE 70



18/94/59.5
25 mm/M 8/-
-/-/70 mm²

6.0...12/2.0...4.0*

10...70

10...70

10...70

10...70

6...0

B 10

Qty.	Qty.
0213200000 20	
1338300000 10	

Type	Cat. No.	Qty.
SH 2	0494920000	10

EK 95/35



25/76/100/92
25/76/100/92
27 mm/M 10/-
-/-/95 mm²

10.0...20.0/1.2...2.4*

10...120

10...95

10...95

10...95

6...4/0

B 12

Qty.
0535300000 10
0535400000 10

Type	Cat. No.	Qty.
------	----------	------


0235000000

SAK-series

** ADm f. EK 35/35 = 1.2 - 2.4 Nm
ADm f. EK 35 = 0.8 - 1.6 Nm

Fuse terminals

KSKM 1 KSKM 1/35



13/69/62
13/69/63
12 mm/-/-

250 V/6.3 A¹⁾/10 mm²

0.5...16

0.5...10

B 6

600 V/10 A/22...8 AWG

Qty. Qty.

9509570000 20 9509600000 20

Type	Cat. No.	Qty.
AP (3)	9509630000	20


5 x 20 mm

0.10 (f)	0430300000	10
0.20 (f)	0430400000	10
0.25 (f)	0430500000	10
0.50 (f)	0430600000	10
1.00 (f)	0430700000	10
1.60 (f)	0430800000	10
2.00 (f)	0430900000	10
2.50 (f)	0431000000	10
3.15 fast	0431100000	10
4.0 fast	0431200000	10
5.0 fast	0431300000	10
6.3 fast	0431400000	10

5 x 20 SBL 0446100000 40

DEK 5 see "Accessories"

KSKM 2 KSKM 2/35



13/69/62
13/69/63
12 mm/-/-

250 V/13 A²⁾/10 mm²

0.5...16

0.5...10

B 6

600 V/15 A/22...8 AWG

Qty. Qty.

9509580000 20 9509610000 20


Type	Cat. No.	Qty.
AP (3)	9509630000	20

1 x 1/4"

1 x 1/4" SBL 0446200000 40

DEK 5 see "Accessories"

KSKM 3 KSKM 3/35



13/69/62
13/69/63
12 mm/-/-

440 V/10 A/10 mm²

0.5...16

0.5...10

B 6

600 V/15 A/22...8 AWG

Qty. Qty.

9509620000 20

Type	Cat. No.	Qty.
AP (3)	9509630000	20

1 1/4 x 1/4"

E 2 A	0294500000	10
E 3 A	0295700000	10
E 5 A	0294600000	10
E 7 A	0295800000	10
E 10 A	0293900000	10

1 1/4 x 1/4" SBL 0446300000 40

DEK 5 see "Accessories"

¹⁾ Max. fuse rating according to DIN 41 660, IEC 127 CEE4 Type 1
²⁾ Fuse according to BS 1362

Fuse terminals

with fault indicator



Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Terminal width (+ 0.2 assembly tolerance)	mm
Insulation stripping length/clamping screw/screwdriver blade	

Connection data

Screw connection, solid
Screw connection, flexible
Conductor cross-section

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	

VDE rated data

Voltage/current	~10 A
LED-current (24...60 V)	≤ 5 mA
LED-current (115...230 V)	
Incandescent lamp-current	≤ 50 mA
Neon lamp-current	≤ 0.5 mA
Cross-section	10 mm ²

Ordering data


Fuse insert	Voltage
5 x 20	LED 24 V~
Acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)	24 V~
without indicator	48 V~
	48 V~
Incandescent lamp	24 V=
	48 V=
Neon lamp	115 V=
	230 V=
Fuse insert	
5 x 25	LED 24 V~
Acc. to DIN 41576	
without indicator	Incandescent lamp 48 V=
	Neon lamp 115 V=
	230 V=

Accessories

Mounting rail	
End brackets (thickness mm)	for TS 32 
	for TS 35 
End plate (thickness mm)	
Cross-connection	
Type 'QL'	
Cross-connection	
Type 'QB'	
Fixing screw (fits QL)	
Screw cap (spare)	
Neon lamp	

SAKS 1

Fuse insert 5x20/5x25



Warning:


In the event of a faulty fuse, the connection system is live!

UL & CE

13
12
0.5...16 mm ²
0.5...10 mm ²
AWG 20...8

SAKS 4

Fuse insert E14/D 01
(e.g. Neozed D 01)



Warning:


In the event of a faulty fuse, the connection system is live!

UL & CE

24
14
0.5...16 mm ²
0.5...10 mm ²
AWG 20...7

SAKS 6

Fuse insert 1 1/4" x 1/4"
acc. to DEF 63



Warning:


In the event of a faulty fuse, the connection system is live!

UL & CE

12
12
0.5...16 mm ²
0.5...10 mm ²
AWG 20...8

SAKS 7

Fuse insert 5x20/5x25



Warning:

In the event of a faulty fuse, the connection system is live!

UL & CE

12
12
0.5...16 mm ²
0.5...10 mm ²
AWG 20...8

Type	Cat. No.	Qty.
SAKS 4		
TS 32 Neon lamp		
Voltage		
115 V=	0101820000	10
480 V=	0102120000	10

Type	Cat. No.	Qty.
SAKS 6 KrG	0531820000	40
for 1 1/4" x 1/4" acc. to DEF 63		
exchangeable neon lamps		
(please order separately)		

Type	Cat. No.	Qty.
SAKS 7 KrG		
for 5 x 25	0576120000	40
SAKS 7 KrG		
for 5 x 20	0573120000	40
exchangeable neon lamps		
(please order separately)		

Type	Cat. No.	Qty.
SAKS 1 LD		
0371420000	10	0225820000
1111220000	10	1111320000
		0214020000
SAKS 1 GL		
		0173220000
0378920000	10	
SAKS 1 GL		
0385320000	10	8068330000
0306120000	10	0199920000
SAK 1 LD		
on demand		
SAKS GL		
on demand		
SAKS 1 GL		
0309320000	10	0198620000

Type	Cat. No.	Qty.
TS 32	0122800000	
TS 35x7.5	0383400000	
TS 35x15	0498000000	
EWK 1 (8.5)	0206160000	50
EW 35 (8.5)	0383560000	50
AP KrG (3)	0191320000	20
SK (5 x 20)	0282100000	20
SK (5 x 25)	0282000000	100

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50
AP KrG	0146720000	20
QL 2	0191400000	50
QL 3	0191500000	50
QL 4	0191600000	20
QL 10	0338800000	20
BSM 3x6 m.SS	0346200000	100
Neon lamp 230 V~	0550300000	
Neon lamp 115 V~	0550200000	

Type	Cat. No.	Qty.
TS 32	0122800000	
EWK 1 (8.5)	0206160000	50
AP KrG (3)	0146720000	20
QL 2	0207800000	20
QL 3	0207900000	20
QL 4	0208000000	20
QL 10	0338900000	20
BSM 4x9 m.SS	0133300000	100
Neon lamp 230 V~	0550300000	
Neon lamp 115 V~	0550200000	

Fuse inserts and gauge rings for Weidmüller fuse terminals

Fuse inserts

for terminal type	Size (mm)	Rated voltage (V)	Rated current (A)	Type	Cat. No.	Qty.
G fuse inserts 5 x 20 without indicator acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)						
SAKS 1	5 x 20 Breaking capacity 1500 A (at 250 V, 50 Hz, cos φ 0.7)	250	0.1 (F)	G 20/0.10A/F	0430300000	10
SAKS 7			0.2 (F)	G 20/0.20A/F	0430400000	10
ASK 1			0.25 (F)	G 20/0.25A/F	0430500000	10
WSI 6			0.5 (F)	G 20/0.50A/F	0430600000	10
			0.63 (F)	G 20/0.63A/F	0430900000	10
			1.0 (F)	G 20/1.00A/F	0430700000	10
			1.6 (F)	G 20/1.60A/F	0430800000	10
			2.0 (F)	G 20/2.00A/F	0430900000	10
			2.5 (F)	G 20/2.50A/F	0431000000	10
			3.15 (F)	G 20/3.15A/F	0431100000	10
			4.0 (F)	G 20/4.00A/F	0431200000	10
			5.0 (F)	G 20/5.00A/F	0431300000	10
			6.3 (F)	G 20/6.30A/F	0431400000	10
G fuse inserts 5 x 25 with indicator acc. to DIN 41576¹)						
SAKS 1	5 x 25 m. K.1) Breaking capacity 80 A (at 250 V, 50 Hz, cos φ = 1)	250	0.25 (M)	G 25/0.25A/M	0546900000	10
SAKS 7			0.5 (M)	G 25/0.50A/M	0510300000	10
WSI 6			0.8 (M)	G 25/0.80A/M	0646400000	10
			1 (M)	G 25/1.00A/M	0265800000	10
			10 (M)⁵)	G 25/10.0A/M	0193100000	10
			2 (F)	G 25/2.00A/F	0192700000	10
			4 (F)	G 25/4.00A/F	0192800000	10
			6.3 (F)	G 25/6.30A/F	0192900000	10
Fuse inserts 1¼" x ¼" without indicator acc. to BS 88						
SAKS 3²)	33 kA Breaking capacity 33 kA fast	440	E 0.5 A	GZ 0.5A/F	0533800000	10
SAKS 6			E 1 A	GZ 1.0A/F	0525500000	10
			E 2 A	GZ 2.0A	0294500000	10
			E 3 A	GZ 3.0A	0295700000	10
			E 5 A	GZ 5.0A	0294600000	10
			E 7 A	GZ 7.0A	0295800000	10
			E 10 A	GZ 10.0A	0293900000	10
D fuse inserts E 16 with indicator acc. to DIN 49360 (diazed)						
SAKS 2	E 10 A	500	10	E 16/10A RT	0208500000	25
			16	E 16/16A GR	0208600000	25
			20	E 16/20A BL	0208700000	25
			25	E 16/25A GE	0208800000	25
D fuse inserts E 14 Size D 01 and E 18 size D 02 with indicator acc. to DIN 49522 (neozed)³)						
SAKS 4⁴)	E 14/2	400	2	E 14/2A RS	0137400000	10
			4	E 14/4A BR	0137500000	10
			6	E 14/6A GN	0328300000	10
			10	E 14/10A RT	0328400000	10
			16	E 14/16A GR	0328500000	10
			20	E 18/20A BL	0361300000	10
SAKS 5	E 18/25	400	25	E 18/25A GE	0361400000	10
	E 18/35		35	E 18/35A SW	0361500000	10
	E 18/50		50	E 18/50A WS	0361600000	10
	E 18/63		63	E 18/63A KU	0361700000	10
						

(F) = fast
(M) = medium-delayed action

(F) = fast
(M) = medium-delayed action


- Note:**
- 1) The SIBA company also supplies 5 x 25 G fuse inserts with indicators in a shipbuilding model for 450 V AC.
 - 2) 5 x 30 (500 V AC) fuse inserts for SAKS 3 are available from the WICKMANN company
 - 3) The LINDNER company also supplies neozed fuse cartridges in an additional shipbuilding mode for 440 V AC.
 - 4) Fuse cartridges with the dimensions 1"x1/4" ≙ 25.4x6.35 mm and 13/32"x1 1/2" ≙ 10.3x38.1 mm are not included in product line.
 - 5) Only for SAKS 1 and SAKS 7.

Gauge rings

For terminal type	Gauge ring type	Amp.	Colour	Type	Cat. No.	Qty.
SAKS 4 and 4/35	P 14/2	2	Pink	P 14/2D01 RS	0138000000	50
	P 14/4	4	Brown	P 14/4D01 BR	0138100000	50
	P 14/6	6	Green	P 14/6D01 GN	0328600000	50
	P 14/1	10	Red	P 14/10D01 RT	0328700000	50
SAKS 5 and 5/35	P 18/20	20	Blue	P 18/20D02 BL	0361800000	50
	P 18/25	25	Yellow	P 18/25D02 GE	0361900000	50
	P 18/35	35	Black	P 18/35D02 SW	0362000000	50
	P 18/50	50	White	P 18/50D02 WS	0362100000	50
SAKS 2 and 2/35	P 16/10	10	Red	P 16/10 RT	0208900000	100
	P 16/16	16	Grey	P 16/16 GR	0209000000	100
	P 16/20	20	Blue	P 16/20 BL	0209100000	100

Disconnect test terminals

ASK 1
ASK 1/35



8/58/49
8/58/44
9 mm/M 3/3.5 x 0.6

500 V/19 A/4 mm²
6 kV/3

0.5...1.0
2

0.5...4
1.5...4
0.5...4

0.5...4
A 3
(QB 2...4) 10

300 V/15 A/12 max. AWG
300 V/6.3 A/26...12 AWG

Qty.

0456360000 100

0105260000 100

Type Cat. No. Qty.

AP (1.5) 0380360000 20

TW HP (2.0) 0607000000 20

QB 2⁴) 0461100000 100

QB 3⁴) 0461200000 50

QB 4⁴) 0461300000 50

multipole interruptable with
group marking carrier SchS 2;
2-pole (Cat. No. 1359500000)
1000 mm (Cat. No. 0337400000)

K sleeve 0553300000 100

DEK 5 FW see "Accessories"

Feed-through terminals with tab connection

SAK 4 S SAK 4 S/35

6.3
2.8



SAK 4 SS SAK 4 SS/35

6.3
2.8



SAKR F SAKR F/35

2.8



Dimensions/approvals

Width/length/height (mm)	with TS 32
Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data

Rated voltage/-current	
Rated cross-section for clamping yokes	
Rated cross-section tab	6.3/2.8 mm
Rated Voltage VDE 0110/1.89/pollution severity	

Further technical data

Tightening torque range	Nm
Torque setting with electric screwdriver type DMS 2	

Clampable conductor

Solid H07V-U	mm²
Stranded H07V-R	mm²
Flexible H07V-K	mm²
Flexible H07V-K and ferrule according to DIN 46 228/1	mm²
Plug gauge according to 60 947-7-1	Size
Continuous current of terminal for conductor size	
Continuous current rating of cross-connection 2 pole	A
Continuous current rating of cross-connection multipole	A

Rated data according to UL/CSA

Voltage/current/conductor size	UL
Voltage/current/conductor size	CSA

Ordering data

Version

Slotted KrG
Slotted blue KrG
Slotted PA
Unslotted KrG

End plate/partition/small partition (thickness mm)

AP	TW	TSch 1	KrG
			Blue KrG
			PA
			PA
			HP

Cross-connection

QL	QB 4	2-pole
		3-pole
		4-pole
		10-pole
		25-pole

BS M 3 x 4.5



BS M 3 x 24




Test plug/socket



Insulation sleeve



Marking tags



DEK

Print

Standard

Mounting rails, end brackets, further marking material see "Accessories"

1) With insulation sleeve

*The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used

SAK-series

Feed-through terminals

**Disconnect terminals
for wrap connection
acc. to DIN 41 611, Part 2 and
for spring-clip connection
acc. to DIN 41 611, Part 4**

DK 4 T

Pin 1 x 1



DK 4 T

Pin 0.8 x 1.6



DK 4 T

Pin 0.8 x 2.4



SAKRT

Pin 1 x 1/0.8 x 2.4
and 0.8 x 1.6



Dimensions

Width/length/height (mm) with TS 32 
Insulation stripping length/clamping screw/screwdriver blade

6/50/58.5/75.5
9 mm/M 3/3.5 x 0.6

6/50/60.5/77.5
9 mm/M 3/3.5 x 0.6

6/50/67.5/84.5
9 mm/M 3/3.5 x 0.6

6/42/40.5/54.5
8 mm/M 3/3.5 x 0.6

Rated data

Rated voltage/current/cross-section
Rated impulse voltage VDE 0110/1.89/pollution severity

250 V/8 A/4 mm²
4 kV/3

250 V/10 A/4 mm²
4 kV/3

250 V/10 A/4 mm²
4 kV/3

250 V/6/8 A/4 mm²
4 kV/3

Further technical data

Tightening torque range Nm
Torque setting with electric screwdriver type DMS 2

0.5...1.0
1

0.5...1.0
1

0.5...1.0
1

0.5...1.0
2

Clampable conductor

Solid H07V-U mm²
Stranded H07V-R mm²
Flexible H07V-K mm²
Flexible H07V-K and ferrule according to DIN 46 228/1
With/without plastic insulating collar mm²
Plug gauge according to IEC 60 947-1 Size
Continuous current of terminal block for conductor size
Continuous current rating of cross-connection 2-pole A
Continuous current rating of cross-connection multipole A

0.5...4
1.5...4
0.5...4
0.5...4
A3
(Q 2...10) 32

0.5...4
1.5...4
0.5...4
0.5...4
A3
(Q 2...10) 32

0.5...4
1.5...4
0.5...4
0.5...4
A3
(Q 2...10) 32

0.5...4
1.5...4
0.5...4
0.5...4
A3
(QB 2...10) 10

Rated data according to UL/CSA

Voltage/current/conductor size UL
Voltage/current/conductor size CSA

—
—


—
—

—
—

—
—

Ordering data

Pin Type
Right PA
Links PA
Horizontal right PA
Vertical right PA
Vertical right Blue PA
Vertical PA
Vertical left PA



Cat. No. Qty.
0536560000 50
0370460000¹⁾ 50
0370360000¹⁾
1398460000¹⁾ 50

Cat. No. Qty.
0370460000¹⁾ 50
0370360000¹⁾

Cat. No. Qty.
0527760000¹⁾ 50

Cat. No. Qty.
1 x 1 **0587460000** 100
0.8 x 2.4 **0545060000** 100
0.8 x 1.6 **0469360000** 100

DK 4 QT
bridgeable on
both levels

Right

PA

End plate/partition (thickness mm)

PA
Blue PA



Type Cat. No. Qty.
AP (1.5) **0359260000** 20
AP (DK4 QT) **1397160000** 20
AP (1.5) **0359280000** 20
TW (2.0) **0607000000** 20

Type Cat. No. Qty.
AP (1.5) **0359260000** 20
AP (1.5) **0359280000** 20
TW (2.0) **0607000000** 20

Type Cat. No. Qty.
AP (1.5) **0359260000** 20
TW (2.0) **0607000000** 20

Type Cat. No. Qty.
AP (1.5) **0211360000** 20
TW (2.0) **0607000000** 20

Small partition



TSch 4

TSch 4 **0363360000** 100

TSch 4 **0363360000** 100

TSch 4 **0363360000** 100

Cross-connection/covers

Q 3 QB 4 2-pole
3-pole
4-pole
10-pole
25-pole



Q 2 **0336400000** 50
Q 3 **0336500000** 50
Q 4 **0336600000** 50
Q 10 **0368600000** 20
QB 2* **0482700000** 100
QB 3* **0482800000** 50
QB 4* **0482900000** 50

Q 2 **0336400000** 50
Q 3 **0336500000** 50
Q 4 **0336600000** 50
Q 10 **0368600000** 20
QB 2* **0482700000** 100
QB 3* **0482800000** 50
QB 4* **0482900000** 50

Q 2 **0336400000** 50
Q 3 **0336500000** 50
Q 4 **0336600000** 50
Q 10 **0368600000** 20
QB 2* **0482700000** 100
QB 3* **0482800000** 50
QB 4* **0482900000** 50

QB 2* **0482700000** 100
QB 3* **0482800000** 50
QB 4* **0482900000** 50
QB 25 blank* **0134000000** 20

Test plug/socket



StB

Plug-test socket without using QL

StB 8.5 (ø23) **0215700000** 50

StB 8.5 (ø23) **0215700000** 50

StB 8.5 (ø2.3) **0215700000** 50




PS

PS 2.3 **0180400000** 20

PS 2.3 **0180400000** 20

PS 2.3 **0180400000** 20



FW/FS

dekafix 6 see "Accessories"

dekafix 6 see "Accessories"

dekafix 6 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* The conductor cross-section for the screw connection is reduced to 2.5 mm² when QB is used.
** Only to be used with PA-version

¹⁾ Shock-proof with ADP4 cover profile (see section "Accessories")

Disconnect test terminals with solder connections

SAK-series

Feed-through terminals for initiators and actuators

DLI 2.5



		6/65/49
Insulation stripping length/clamping screw/screwdriver blade		7 mm/M 2.5/3.5 x 0.6

DLI 2.5 LD PNP



		6/65/49
Insulation stripping length/clamping screw/screwdriver blade		7 mm/M 2.5/3.5 x 0.6

DLI 2.5 LD NPN



		6/65/49
Insulation stripping length/clamping screw/screwdriver blade		7 mm/M 2.5/3.5 x 0.6

DLD 2.5



		6/82/49
Insulation stripping length/clamping screw/screwdriver blade		7 mm/M 2.5/3.5 x 0.6

Dimensions/approvals

Width/length/height (mm)	with TS 35 x 7.5
Insulation stripping length/clamping screw/screwdriver blade	

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section	250 V/20 A/2.5 mm ²
Rated impulse voltage/pollution severity	4 kV/3

Further technical data

Tightening torque range	Nm	0.4...0.6
Torque setting with electric screwdriver type DMS 2	1	

Clampable conductor

Solid H07V-U	mm ²	0.5...4
Stranded H07V-R	mm ²	0.5...2.5
Flexible H07V-K	mm ²	0.5...4
Flexible H07V-K and ferrule according to DIN 46228/1	mm ²	0.5...2.5
Plug gauge according to 60 947-7-1	Size	A 3
Continuous current of terminal for conductor size		20 A/2.5 mm ²
Continuous current rating of cross-connection 2...5-pole	A	(Q 2...10) 20
Continuous current rating of cross-connection 6...10-pole	A	

Rated data according to UL/CSA

Voltage/current/conductor size	UL	300 V/10 A/26...12 AWG
Voltage/current/conductor size	CSA	300 V/10 A/26...12 AWG

Ordering data

	Cat. No.	Qty.
Standard	1313360000	100
with diode 1N4007		
with LED red (5...30 V)	1578510000	100
with LED green (5...30 V)	1578520000	100
with LED and diode 1N4007		
with LED and diode 1N4007		
Block of 10 ¹⁾	(w/o) 1411360000	10
Block of 10 ¹⁾	(with dekafix) 1579070000	10
Fuse inserts		

End plate/Small partition

AP-DLI	AP-DLD	Part-AP	TSch 1	Type	Cat. No.	Qty.
				AP	1313260000	20
				TSch 1	0319160000	100

Test plug/plug socket

	StB 8.5	PS	StB 8.5 (ø23)	0215700000	50
			PS 2.3	0180400000	20

Cross-connection

	Q 3	1312500000	50
	Q 3	1312600000	50
	Q 4	1312700000	50
	Q 10	1313100000	20
	Q 20	1399800000	20

VQB



Snap fit, external cross-connection VQB 1.5.

For cross-connections for more than 20 terminals, replace VH with VH 4.2 (134580) without internal thread

Group marking

WT 4		WT 4	1341060000	100
SF 10		SF 10	0332400000	1000
SG 10		SG 10	0332500000	1000

Cover



ADP	0485400000	20
HP 4	0485860000	20

Marking tags

	1	2	3	4	5	6	DEK	Standard	DEK 6	see "Accessories"
--	---	---	---	---	---	---	-----	----------	-------	-------------------

Mounting rails, end brackets, further marking material see "Accessories"

1) DLI 2.5/35/10 = Block of 10 with built-in cross-connections * only in upper busbar

Feed-through terminals for initiators and motors


VLI 1.5



VLI 1.5PE



MAK 2.5



Dimensions/approvals

Width/length/height (mm) with TS 35 x 7.5

Insulation stripping length/clamping screw/screwdriver blade

6/79/64
8 mm/M 2.5/3.5 x 0.6

6/69/63
8 mm/M 2.5/3.5 x 0.6

6/88/64
8 mm/M 2.5/3.5 x 0.6

Rated data according to IEC 60 947-7-1

Rated voltage/current/cross-section

250 V/17.5 A/1.5 mm²

250 V/17.5 A/1.5 mm²

500 V (L-L)/250 V (L-PE)

Rated impulse voltage/pollution severity

4 kV/3

4 kV/3

6 kV/3

Further technical data

Tightening torque range

Nm

0.4...0.6**

0.4...0.6

0.4...0.6

Torque setting with electric screwdriver type DMS 2

1

1

1

Clampable conductor

Solid H07V-U

mm²

0.5...4.0

0.5...4.0

0.5...4.0

Stranded H07V-R

mm²

0.5...2.5

0.5...2.5

0.5...2.5

Flexible H07V-K

mm²

0.5...4

0.5...4

1.5...4

Flexible H07V-K and ferrule DIN 46 228/1

mm²

0.5...2.5

0.5...2.5

0.5...2.5

Flexible H07V-K and ferrule with plastic insul. collar

mm²

0.5...2.5

0.5...2.5

0.5...2.5

Plug gauge according to 60 947-7-1

Size

A3

A3

A3

Continuous current of terminal for conductor size

24 A/2.5 mm²

24 A/2.5 mm²

24 A/4 mm²

Continuous current rating of cross-connection, multipole

A

24

24

Rated data according to UL/CSA

Voltage/current/conductor size

UL

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

Voltage/current/conductor size

CSA

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

300 V/10 A/26...12 AWG

Ordering data

Version

PA

Cat. No. Qty.
1633250000 50

Cat. No. Qty.
1633310000 50

Cat. No. Qty.
1615270000 50
 1631650000 50

End plate/partition

End plate

Type Cat. No. Qty.
AP VLI1.5 **1633260000** 20

Type Cat. No. Qty.
AP VLI1.5/PE **1633320000** 20

Type Cat. No. Qty.
AP MAK2.5 **1615280000** 20

Partial end plate for VLI1.5 – MAK2.5 combination

TEAP2 MAK2.5 **1633330000** 20

TEAP VLI1.5 **1633270000** 20

TEAP2 MAK2.5 **1633330000** 20

Partial end plate for VLI1.5 – VLI1.5PE combination

TEAP VLI1.5 **1633270000** 20

TEAP1 MAK2.5 **1633340000** 20

TEAP1 MAK2.5 **1633340000** 20

Partial end plate for VLI1.5PE – MAK2.5 combination

Cross-connection

VQB 50-pole, snap-fit, external cross-connection

VQB1.5/50BL* **1633280000** 5

VQB1.5/50BL* **1633280000** 5

VQB1.5/50BL* **1633280000** 5

VQB1.5/50RT* **1633290000** 5

VQB1.5/50RT* **1633290000** 5

VQB1.5/50RT* **1633290000** 5

VQB1.5/50SW* **1635120000** 5

VQB1.5/50SW* **1635120000** 5

VQB1.5/50SW* **1635120000** 5



QB 25-pole external cross-connection

QB 25 SW* **0520000000** 20

QB 25 RT* **0520060000** 20

QB 25 BL* **0520080000** 20


Group marking

Tag carrier

for S 10 tags

Marking tags

Print



DEK

Standard

DEK 5 see "Accessories"

DEK 5 see "Accessories"

DEK 5 see "Accessories"

Mounting rails, end brackets, further marking material see "Accessories"

* When using cross-connection bridges, the connected cross-section is reduced by one level
** 0.4...0.45 for lower connection level

Disconnect test terminal against induced high voltage

Measures to minimize risks of electric voltage peaks in control systems of power plants and transforming stations:

- Insulation between installation and control cable by pulling disconnect plugs.
- Grounding of control cable is possible on an appropriate location of the workplace.
- Easy connection of electric isolation of counting, control and communication circuits.

Electricity Supply Industry Standard ESI 12-4 1973

The Electricity Supply Industry Standard ESI 12-4 1973 defines a detailed specification of control and protection equipment. The main functions of these installations are as follows:

- Insulation of the control cables located in front of ground or installation lines with increased potential, which is required to prevent unintentional contact of service staff with live parts.
- Separation of control cables from local control circuits.
- Application also includes test connections for auxiliary control circuits and / or local control circuits.
- Grounding of control cables and / or auxiliary control circuits.
- Bundled disconnection of all auxiliary control circuits from potential earth.
- A test voltage can be applied using the screening connection of the control cable, which is normally routed on the enclosure, with the help of an appropriate separation. This permits to check whether the screening line is correctly functioning. For this test, an insulated feed-through plate is required.

ESI 12-4:

"Terminating Equipment for Pilot Cables subject to Induced Transient Voltages exceeding 650 V rms".

PPT/35



SAKH 6



Dimensions/approvals														
Width/length/height (mm)	with TS 35 x 7.5			15/138/79										
Insulation stripping length/clamping screw/screwdriver blade			12 mm		12 mm									
Rated data according to IEC 60 947-7-1														
Rated voltage/current			15 kV ac (ESI 12-4)**/30 A		1 kV ac / 1.5 kV dc / 47 A									
Rated impulse voltage/pollution severity					>15 kV (from terminal to terminal)									
Clampable conductor														
Solid H07V-U			mm ²	0.5...10	0.5... 6									
Stranded H07V-R			mm ²	0.5...10*	0.5... 6									
Ordering data		Version		Cat. No.	Qty.		Cat. No.	Qty.						
		EP	PPT/35	3835020000	10	SAKH 6	0126600000	50						
			incl. disconnect plug and displacement tool (if min. 10 items are ordered)											
End plate		EP	AP/PPT (3)	3835120000	10	AP	0131700000	20						
Disconnect plug			TST/PPT	3835360000	10									
Displacement tool		PA	PH/PPT	3835260000	10									
			The disconnect plug may only be removed with the displacement tool.											
Test plug/socket			PS (4)	0299600000	20									
			StB 17	0147100000	50									
Insulated mounting rail		PVC 35 x 1.5 mm	TSK 35	0514300000	1									
Marking tags		Print												
	<table border="1"><tr><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td></tr></table>	1	2	3	4	5	6	DEK	Standard	DEK 5 see "Accessories"		DEK 5 see "Accessories"		
1	2	3	4	5	6									
Mounting rails, end brackets, further marking material see "Accessories"														

* Also two push-on tabs are possible
** mounted on an insulated mounting rail

Rail mounting TS 15

AK 4 AK 4/10



38.5 A / 6 mm²

UL	Cat. No.	Qty.
60/32/34		
9 mm/M 3/3.5 x 0.6		
690 V/32 A/4 mm ²		
8 kV/3		
0.5...1.0		
2		
0.5...6		
1.5...4		
0.5...4		
0.5...4		
0.5...4		
0.5...4		
0.2...6.0 / A 3		
20		
20		
TS 15	Cat. No.	Qty.
0489560000	100	
(10pol./no.mk.)	0366560000	10
(10pol./w.mk.)	0469560000	10
Type	Cat. No.	Qty.
BB 3 (8.0)	0366660000	50
combined AP + end brackets		
TW/AP (1.5)	1331760000	20
TSch 4	0363360000	100
Q 2	0369000000	50
Q 3	0369100000	50
Q 4	0369200000	50
Q 10	0369300000	20
AD 4	0303400000	50
BSKM 25x18	0303300000	100
StB 8.5	0215700000	50
PS 2.3	0180400000	20
DEK 6	see "Accessories"	

AKE 2.5



UL	Cat. No.	Qty.
5/28/27		
7 mm/M 2.5/3.0 x 0.5		
IEC 60 947-7-2		
-/-/2.5 mm ²		
4 kV/3		
0.4...0.6		
1		
0.5...4		
1.5...2.5		
0.5...4		
0.5...2.5		
0.5...2.5		
0.13...4.0 / A 3		
-/-/26...12 AWG		
-/-/26...12 AWG		
TS 15	Cat. No.	Qty.
1303360000	100	
(green/yellow)		
Type	Cat. No.	Qty.

AKE 4



UL	Cat. No.	Qty.
7/32/34		
9 mm/M 3/3.5 x 0.6		
IEC 60 947-7-2		
-/-/4 mm ²		
8 kV/3		
0.5...1.0		
2		
0.5...6		
1.5...4		
0.5...4		
0.5...2.5		
0.5...2.5		
0.13...4.0 / A 3		
-/-/22...12 AWG		
-/-/26...12 AWG		
TS 15	Cat. No.	Qty.
0380260000	100	
(green/yellow)		
Type	Cat. No.	Qty.

AKE 4 MS



UL	Cat. No.	Qty.
7/27.5/30		
9 mm/M 3/3.5 x 0.6		
-/-/4 mm ²		
0.8...1.6		
3		
0.5...4		
1.5...4		
0.5...4		
0.5...4		
0.5...4		
0.5...4.0 / A 3		
-/-/22...14 AWG		
TS 15	Cat. No.	Qty.
0211200000	50	
Type	Cat. No.	Qty.

ASK 1 Fuse terminal



UL	Cat. No.	Qty.
8/58/34		
9 mm/M 3/3.5 x 0.6		
500 V/6.3 A ¹ /4 mm ²		
6 kV/3		
0.5...1.0		
2		
0.5...4		
1.5...4		
0.5...4		
0.5...2.5		
0.5...2.5		
0.13...4.0 / A 3		
(QB 2...4) 10		
300 V/10 A/22...12 AWG		
300 V/6.3 A/26...12 AWG		
TS 15	Cat. No.	Qty.
0376860000	100	
5 x 20 without indicator		
AP (1.5)	0380360000	20
QB 2 ¹⁾ insul.	0461100000	50
QB 3 ¹⁾ insul.	0461200000	50
QB 4 ¹⁾ insul.	0461300000	50
3-pole ganging with tag bar SchS 2, snapped onto three disconnect levers (Cat. No. 0337400000)		
K sleeve	0553300000	100
DEK 6.5	see "Accessories"	

SAKR Isolating blade terminal with 2 sockets or with 2 clamping screws



UL	Cat. No.	Qty.
6.5/42/45		
8 mm/M 3/3.5 x 0.6		
400 V ² /10 A/4 mm ²		
6 kV/3		
0.5...1.0		
2		
0.5...4		
1.5...4		
0.5...4		
0.5...4		
0.5...4		
0.13...4.0 / A 3		
(QB 2...4) 10		
with 2 StB	0412860000	100
w. clamp.screw	0412760000	100
Type	Cat. No.	Qty.
AP (1.5)	0211360000	20
QB 2 ¹⁾ insul.	0482700000	50
QB 3 ¹⁾ insul.	0482800000	50
QB 4 ¹⁾ insul.	0482900000	50
QB 25 ¹⁾ blank	0134000000	20
PS 2.3	0180400000	20
DEK 6.5	see "Accessories"	

¹⁾ The conductor cross-section is * With contact sleeve 19 A reduced to max. 2.5 mm² when QB is used.

²⁾ As disconnect test terminal: rated voltage 250 V

Feed-through terminals for TS 15

Tab connection Solder connection

AKZ 4 SS

AKZ 4 SS

AKZ 4 S

AKZ 4 SF



Dimensions/approvals		UL ®	UL ®	UL ®	®
Width/length/height (mm)	with TS 15	6/28.5/30.5	6/28.5/30.5	6/27/30	6/27/30
Insulation stripping length/clamping screw/screwdriver blade				9 mm/M 3/3.5 x 0.6	9 mm/M 3/3.5 x 0.6
Rated data					
Rated voltage*/current/cross-section		400 V/8 A/2.5/1 mm ²	400 V/8 A/1 mm ²	400 V/8 A/4/1 mm ²	400 V/8 A/4/1 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity		6 kV/3	6 kV/3	6 kV/3	6 kV/3
Further technical data					
Tightening torque range Nm				0.5...1.0	0.5...1.0
Torque setting with electric screwdriver type DMS 2				2	2
Clampable conductor					
Solid H07V-U mm ²				0.5...4	0.5...4
Stranded H07V-R mm ²				1.5...4	1.5...4
Flexible H07V-K mm ²		Tab connec. 6.3 and 2.8 mm	Tab connection 2.8 mm	0.5...4	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1 mm ²				0.5...4	0.5...4
Flexible H07V-K and ferrule with plastic insul. collar mm ²				0.5...4	0.5...4
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size				0.2...4/A 3	0.2...4/A 3
Continuous current rating of cross-connection 2-pole A		20	20	20	20
Continuous current rating of cross-connection multipole A		20	20	20	20
Rated data according to UL/CSA					
Voltage/current/conductor size UL		150 V/10 A/22...12 AWG	150 V/10 A/22...12 AWG	150 V/20 A/22...12 AWG	
Voltage/current/conductor size CSA		300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG	300 V/10 A/24...12 AWG
Ordering data		Type	Type	Type	Type
		TS 15 Cat. No. Qty.	TS 15 Cat. No. Qty.	TS 15 Cat. No. Qty.	TS 15 Cat. No. Qty.
		KrG			
		PA	0324560000 100	0324460000 100	0324460000 100
		Blue PA			0158760000 100
		PA			
End plate (thickness mm)		Type	Type	Type	Type
		PA AP (1.5) 0294460000 20	PA AP (1.5) 0294460000 20	PA AP (1.5) 0294460000 20	PA AP (1.5) 0294460000 20
		PA			
		Blue PA			
		HP			
		HP			
		BB			
Partition (thickness mm)		Type	Type	Type	Type
		PA TW (0.5) 0348260000 50	PA TW (0.5) 0348260000 50	PA TW (0.5) 0348260000 50	PA TW (0.5) 0348260000 50
		HP			
		HP			
Small partition					
Cross-connection					
		Q 2 0369000000 50	Q 2 0369000000 50	Q 2 0336400000 50	Q 2 0336400000 50
		Q 3 0369100000 50	Q 3 0369100000 50	Q 3 0336500000 50	Q 3 0336500000 50
		Q 4 0369200000 50	Q 4 0369200000 50	Q 4 0336600000 50	Q 4 0336600000 50
		Q 10 0369300000 20	Q 10 0369300000 20	Q 10 0368600000 20	Q 10 0368600000 20
Switchable cross-connection link					
		VL 2 0446700000 50	VL 2 0446700000 50	VL 2 0446700000 50	VL 2 0446700000 50
		BS 0446600000 50	BS 0446600000 50	BS 0446600000 50	BS 0446600000 50
		VH 10 0266800000 100	VH 10 0266800000 100	VH 10 0266800000 100	VH 10 0266800000 100
		BS M 25x14 0266800000 100	BS M 25x14 0266800000 100	BS M 25x14 0266800000 100	BS M 25x14 0266800000 100
Test plug/socket					
		StB 8.5 0215700000 50	StB 8.5 0215700000 50	StB 8.5 0215700000 50	StB 8.5 0215700000 50
		PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20
Cover					
Insulation sleeves					
		IH 2.8 0386060000 100	IH 2.8 0386060000 100	IH 2.8 0386060000 100	IH 2.8 0386060000 100
		IH 6.3 0386260000 100	IH 6.3 0386260000 100	IH 6.3 0386260000 100	IH 6.3 0386260000 100
Marking tags		Print	Print	Print	Print
		DEK Standard	DEK 6 see "Accessories"	DEK 6 see "Accessories"	DEK 6 see "Accessories"
		1 2 3 4 5 6			
Mounting rails, end brackets, further marking material see "Accessories"					

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

Feed-through terminals for TS 15


AL 1



AKZ 1.5 L



AKZ 4 L



AKZ 4 LL



6.5/32/21	5/34.5/25	6/35.5/30	6/44/30
	7 mm / M 2.5 / 3.0 x 0.5	9 mm / M 3 / 3.5 x 0.6	
400 V/16 A/1 mm ² 6 kV/3	250 V/16 A/1.5 mm ² 4 kV/3	250 V/16 A/4/1.5 mm ² 4 kV/3	250 V/16 A/1.5 mm ² 4 kV/3
	0.4...0.7 1	0.5...1.0 2	
0.5...1	0.5...2.5 1.5	0.5...4 1.5...4	0.5...1.5 1.5
0.5...1	0.5...1.5 0.5...1.5 0.2...2.5 / A 1	0.5...4 0.5...4 0.5...4 0.2...4.0 / A 3	0.5...1.5 0.5...1.5 0.2...2.5 / -
	24 24	20 20	20 20
	150 V/10 A/24...16 AWG	300 V/20 A/22...12 AWG 300 V/10 A/24...12 AWG	300 V/20 A/22...12 AWG 300 V/10 A/24...12 AWG
 TS 15 Cat. No. Qty. 0137320000 100	 TS 15 Cat. No. Qty. 0340160000 100	 TS 15 Cat. No. Qty. 0334820000 100 0334860000 100	 TS 15 Cat. No. Qty. 0346460000 100
Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
AP (1.0) 0164100000 100	AP (1.5) 0329660000 20	AP (1.5) 0294420000 20 AP (1.5) 0294460000 20 AP (1.5) 0294480000 20	AP (1.5) 0294460000 20
EP (1.0) 0164100000 100			
EP (1.0) 0164500000 100			
TW (0.5) 0166800000 50	TW (0.5) 0166800000 50	TW (0.5) 0348260000 50	TW (0.5) 0348260000 50
		TSch 4 0363360000 100	TSch 4 0363360000 100
	Q 2 0368200000 50 Q 3 0368300000 50 Q 4 0368400000 50 Q 10 0368500000 20	Q 2 0336400000 50 Q 3 0336500000 50 Q 4 0336600000 50 Q 10 0368600000 20 VL 2 0446700000 50 VH 10 0446600000 50 BSM 2.5 x 14 0266800000 100	Q 2 0336400000 50 Q 3 0336500000 50 Q 4 0336600000 50 Q 10 0368600000 20 VL 2 0446700000 50 VH 10 0446600000 50 BSM 2.5 x 14 0266800000 100
	StB 8.5 0215700000 50	StB 8.5 0215700000 50	StB 8.5 0215700000 50
	PS 2.3 0180400000 20	PS 2.3 0180400000 20	PS 2.3 0180400000 20
		AD 4 0303400000 50 BSKM 25x18 0303300000 100	AD 4 0303400000 50 BSKM 25x18 0303300000 100
DEK 6.5 see "Accessories"	DEK 5 see "Accessories"	DEK 6 see "Accessories"	DEK 6 see "Accessories"

Feed-through terminals for TS 15

Solder connection
Spring-clip connection
acc. to DIN 41611 Part 4
Wrap connection
acc. to DIN/IEC 352 Part 1

AKZ 1.5 T



AKZ 1.5 T



AKZ 1.5 T



AKZ 2.5 K




Dimensions/approvals		AKZ 1.5 T	AKZ 1.5 T	AKZ 1.5 T	AKZ 2.5 K									
Width/length/height (mm)	with TS 15	5/25/45	5/25/39.5	5/28/44	5/26/46.7									
Pin size		0.8 x 1.6	1 x 1	0.8 x 1.6	0.8 x 1.6									
Insulation stripping length/clamping screw/screwdriver blade		7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5	7 mm/M 2.5/3.0 x 0.5									
Rated data														
Rated voltage/current/cross-section		125 V/8 A/1.5 mm ²	125 V/8 A/1.5 mm ²	125 V/8 A/1.5 mm ²	125 V/10 A/2.5 mm ²									
Rated impulse voltage VDE 0110/1.89/pollution severity		2.5 kV/3	2.5 kV/3	2.5 kV/3	2.5 kV/3									
Further technical data														
Tightening torque range	Nm	0.4...0.7	0.4...0.7	0.4...0.7	0.4...0.6									
Torque setting with electric screwdriver type DMS 2		1	1	1	1									
Clampable conductor														
Solid H07V-U	mm ²	0.5...2.5	0.5...2.5	0.5...2.5	0.5...4									
Stranded H07V-R	mm ²	1.5	1.5	1.5	1.5...2.5									
Flexible H07V-K	mm ²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5									
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5									
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...1.5	0.5...1.5	0.5...1.5	0.5...2.5									
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1	Size	0.13...2.5 / A1	0.13...2.5 / A1	0.13...2.5 / A1	0.13...4.0 / A3									
Continuous current rating of cross-connection 2-pole	A	24	24	24	24									
Continuous current rating of cross-connection multipole	A	24	24	24	24									
Rated data according to UL/CSA														
Voltage/current/conductor size	UL	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG	300 V/10 A/26...14 AWG									
Voltage/current/conductor size	CSA	300 V/10 A/24...16 AWG	300 V/10 A/24...16 AWG	300 V/10 A/24...16 AWG	300 V/10 A/26...10 AWG									
Ordering data		Pin versions	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	Mounting, horizontal	0.6 x 0.6	AKZ 1.5 T	0442560000	100	AKZ 1.5 T	0483660000	100	AKZ 1.5 T	0400460000	100	AKZ 1.5 T	0400360000	100
	Mounting, vertical	1.0 x 1.0	AKZ 1.5 T	0357960000	100	AKZ 1.5 T	0357860000	100	AKZ 1.5 T			AKZ 2.5 K	0696260000	100
		0.8 x 1.6 horizont.	AKZ 1.5 W	0329460000	100									
		0.8 x 1.6 vertical												
		0.8 x 2.4 horizontal												
		0.8 x 2.4 vertical												
End plate (thickness mm)		PA	AP (1.5)	0340560000	50	AP (1.5)	0340560000	50	AP (1.5)	0340560000	50	AP (2.5)	0697260000	50
Partition (thickness mm)		PA										TW (1.5)	0318560000	20
Small partition														
Cross-connection														
	2-pole	Q 2	0368200000	50	Q 2	0368200000	50	Q 2	0368200000	50	Q 2	0368200000	50	
	3-pole	Q 3	0368300000	50	Q 3	0368300000	50	Q 3	0368300000	50	Q 3	0368300000	50	
	4-pole	Q 4	0368400000	50	Q 4	0368400000	50	Q 4	0368400000	50	Q 4	0368400000	50	
	10-pole	Q 10	0368500000	20	Q 10	0368500000	20	Q 10	0368500000	20	Q 10	0368500000	20	
Switchable cross-connection link														
	VL													
	BS													
	VH													
Test plug/socket														
	StB	Plug test socket ø 2.3	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50	StB 8.5	0215700000	50
	PS		PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20	PS 2.3	0180400000	20
Marking tags														
	DEK	Standard	DEK 5	see "Accessories"		DEK 5	see "Accessories"		DEK 5	see "Accessories"		DEK 5	see "Accessories"	
Mounting rails, end brackets, further marking material see "Accessories"														

Feed-through terminals for TS 15

for temperature measuring circuits


AKZ 4/TC



Weidmüller's thermocouple terminals are specially designed for transmitting the smallest voltages in temperature measuring circuits. Special busbars ensure that no false signals occur in the terminal when temperature differences exist in the positive and negative path. This high measuring precision is necessary for, e.g. test beds for aircraft engines, for complicated chemical processes, control systems, etc.

- Busbar material corresponds to thermal and compensating conductors
- Clear thermocouple marking
- 2-pole blocks per thermocouple
- Row width 14 mm, incl. end plate

Configuration of a temperature measuring circuit



- | | |
|--------------------------|-----------------------------------|
| 1 Thermocouple (sensor) | 4 Reference point |
| 2 Thermocouple terminals | 5 Supply conductors (to and from) |
| 3 Compensating conductor | 6 Measuring device |

The thermocouple terminals displayed in this measurement circuit are used to thermoelectrically transmit thermal e.m.f. of the thermocouple to the reference point and indicating device. Thermocouple terminals are required for the construction of temperature measuring circuits.


Dimensions		
Width/length/height (mm)	with TS 15	14/27/30
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6
Rated data		
Rated voltage/current/cross-section		~/4 mm²
Further technical data		
Tightening torque range	Nm	0.5...1
Torque setting with electric screwdriver type DMS 2		2
Clampable conductor		
Solid H07V-U	mm²	0.5...4
Stranded H07V-R	mm²	1.5...4
Flexible H07V-K	mm²	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1	mm²	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar	mm²	0.5...2.5
Plug gauge acc. to IEC 60 947-1	Size	A 3
Continuous current of terminal for conductor size		
Continuous current rating of cross-connection 2-pole	A	
Continuous current rating of cross-connection multipole	A	
Ordering data		
Version		TS 15 Cat. No. Qty.
for thermocouples	Type J Fe – CuNi	1627010000 20
Acc. to IEC 584 Type T	Cu – CuNi	on demand
(DIN 43710) Type K	NiCr – Ni	1677130000 20
Type E	NiCr – CuNi	on demand

End plate		Cat. No.	Qty.
AP (thickness 1.5 mm)	PA	0294460000	20
Partition			
TW (thickness 0.5 mm)	PA	0348260000	50

Thermocouple, type J	
Thermocouple acc. to IEC 584 (DIN 43 710)	Busbar
	Constantan (CuNi)
	Iron (Fe)



Marking tags		Print
Material V0	DEK 5/6	1789590000 500



Mounting rails, end brackets, further marking material see "Accessories"

Multipole terminal blocks


Screw connection

MK 2/12

MK 10/14

MK 3/12

MK 4/16

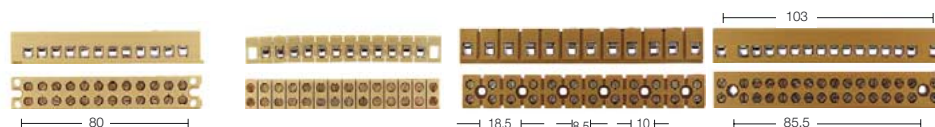[illegible]

Multipole terminal blocks

Screw/tab connection

MK 5/2

KS 2...10

BK 2...12

MK 6/2...6/6



Dimensions/approvals

Width/length/height (mm)		40/18/15.5	see table below	see table below	see table below
Insulation stripping length/clamping screw/screwdriver blade		5 mm/M 2.5/3.5 x 0.6	8 mm/M 3/4.0 x 0.8	8 mm/M 3/4.0 x 0.8	9 mm/M 4/4.0 x 0.8
Rated data according to IEC 60 947-7-1					
Rated voltage/current/cross-section		500 V/24 A/2.5 mm ²	500 V/24 A/2.5 mm ²	400 V/32 A/4 mm ²	690 V/41 A/6 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity		6 kV/3	6 kV/3	6 kV/3	8 kV/3
Further technical data					
Tightening torque range	Nm	0.4...0.45	0.5...0.7	0.5...0.7	1.2...2.0
Torque setting with electric screwdriver type DMS 2		1	2	2	4
Clampable conductor					
Solid H07V-U	mm ²	0.5...4	0.5...4	0.5...4	0.5...6
Stranded H07V-R	mm ²	1.5...2.5	1.5...2.5	1.5...4	1.5...6
Flexible H07V-K	mm ²	0.5...2.5	0.5...2.5	0.5...4	0.5...6
Flexible H07V-K and ferrule DIN 46 228/1	mm ²	0.5...1.5	0.5...1.5	0.5...4	0.5...4
Flexible H07V-K and ferrule with plastic insul. collar	mm ²	0.5...1.5	0.5...1.2	0.5...4	0.5...4
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size		0.2...4.0 / A 2	0.2...4.0 / A 2	0.33...4.0 / A 3	0.33...6.0 / A 3

Rated data according to UL/CSA

Voltage/current/conductor size	UL		300 V/20 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/30 A/22...10 AWG
Voltage/current/conductor size	CSA		300 V/25 A/24...12 AWG	300 V/10 A/22...12 AWG	300 V/40 A/22...10 AWG

Ordering data

Versions


	Cover D 2 (for MK 5/2)	2-pole	MK 5/2 KrG	0243820000	100	KS 2 KrG ²⁾	0134420000	100	BK 2 KrG	0624720000	50	MK 6/2 KrG	0620420000	50	
		Cover D 4 (for KS 4)	3-pole							BK 3 KrG	0624920000	50	MK 6/3 KrG	0620320000	50
			4-pole				KS 4 KrG ²⁾	0140320000	50	BK 4 KrG	0625120000	50	MK 6/4 KrG	0620220000	20
			4-pole												
			6-pole				KS 6 KrG ²⁾	0140620000	50	BK 6 KrG	0625220000	50	MK 6/6 KrG	0620120000	20
			6-pole												
			8-pole												
			8-pole												
			10-pole				KS 10 KrG ²⁾	0141620000	20						
			10-pole												
12-pole			Cover			Cover			BK 12 KrG	0625320000	50				
12-pole	D2 (for MK 5/2)	0244060000	50	D 2 (for KS 2)	0134500000	100									
				D 4 (for KS 4)	0140500000	50									
				D 6 (for KS 6)	0140800000	50									
				D 10 (for KS 10)	0141800000	20									




Cover D 2
(for MK 5/2)



Cover D 4
(for KS 4)



Marking tag cover



Dimensions

Type	a	b
KS 2	42	32
KS 4	66	56
KS 6	90	80
KS 10	138	128

Dimensions

Type	a	b
BK 2	20	–
BK 3	31	11
BK 4	38	18
BK 6	52	32
BK 12	92	72.5

SN 0200100000 500

Dimens. Length/attach.dim.

Type	KRG
MK 6/2	23.5
MK 6/3	36.5
MK 6/4	49.5
MK 6/6	75.5

Expansion rivet

Marking strips

printed
1 ...

unprinted

ELSb 2	0143200000	50
ELSb 4	0143300000	50
ELSb 6	0143400000	50
ELSb 10	0143500000	50
ELSo 2	0142800000	50
ELSo 4	0142900000	50
ELSo 6	0143000000	50
ELSo 10	0143100000	50

BSTb 28/2	0203600000	50
BSTb 28/3	0203800000	50
BSTb 28/4	0197300000	50
BSTb 28/6	0197500000	50
BSTb 28/12	0198800000	50
BSTo 28/2	0203500000	50
BSTo 28/3	0203700000	50
BSTo 28/4	0197200000	50
BSTo 28/6	0197400000	50
BSTo 28/12	0198700000	50

BSTb 17/6 0304600000 50

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ Projecting length = 1 mm. To be considered for the last terminal in a row!
Printed on top on request

²⁾ Please order cover and marking strips separately.

Multipole terminal blocks


MF 1/6...1/12



SLS 2/2



SLS 2/4



Max. technical data

Dimensions/approvals

Width/length/height (mm)

Insulation stripping length/clamping screw/screwdriver blade

Rated data according to IEC 60 947-7-1

Rated voltage²⁾/current/cross-section

Rated impulse voltage VDE 0110/1.89/pollution severity

Further technical data

Tightening torque range

Nm

Torque setting with electric screwdriver type DMS 2

Clampable conductor

Solid H07V-U

mm²

Stranded H07V-R

mm²

Flexible H07V-K

mm²

Flexible H07V-K and ferrule DIN 46 228/1

mm²

Flexible H07V-K and ferrule with plastic insul. collar

mm²

Max. clamping range in mm²/plug gauge acc. to IEC 60 947-1 Size

Rated data according to UL/CSA

Voltage/current/conductor size

UL

Voltage/current/conductor size

CSA

Ordering data

PA



see below



see below

8 mm/M 3.5/4.0 x 0.8

400 V²⁾/16 A/2.5/1 mm²

6 kV/3

0.8...1.6

3

0.5...4

1.5...4

0.5...4

0.5...4

0.5...4

0.33...4.0 / A 3

300 V/10 A/24...12 AWG

300 V/10 A/22...10 AWG

300 V/10 A/22...10 AWG

Type Cat. No. Qty.

MF 1/6 KrG³⁾ **0479720000** 100

MF 1/6 KrG³⁾ **0480020000** 100

MF 1/8 KrG³⁾ **0479820000** 50

MF 1/8 KrG³⁾ **0480120000** 50

MF 1/12 KrG³⁾ **0479920000** 50

MF 1/12 KrG³⁾ **0480220000** 50


Type Cat. No. Qty.

SLS 2/2 KrG **0213420000** 100

SLS 2/4 KrG **0240420000** 50



SLS 2/4 KrG **0480320000** 50

Slotted



Dimensions

Type	a	b	c	d
MF 1/6	52	34	9.5	6.5
MF 1/8	68	50	9.5	6.5
MF 1/12 113 ^{+0.5}	102	8	7.5	



Expansion rivet/insulation sleeve

IH

IH 2.8 **0386060000** 100

IH 6.3 **0386260000** 100

SN **0200100000** 500

IH 2.8 **0386060000** 100

IH 6.3 **0386260000** 100

Cover/marking strips

BSTb 10/6 **0240900000** 50

BSTb 10/8 **0241100000** 50

BSTb 10/12 **0209500000** 50

BSTo 10/6 **0240800000** 50

BSTo 10/8 **0241000000** 50

BSTo 10/12 **0209400000** 100

Mounting rails, end brackets, further marking material see "Accessories"


* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

²⁾ Single tab
³⁾ Double tab


Multipole terminal blocks

Screw, solder, tab
connection
Modular design

AKB 4



AKZ 2.5



ASK 1



Max. technical data

Dimensions/approvals		AKB 4	AKZ 2.5	ASK 1
Width/length/height (mm)		6/27/23	5/25.5/26.5	8/58/30.5
Insulation stripping length/clamping screw/screwdriver blade		9 mm/M 3/3.5 x 0.6	7 mm/M 2.5/3 x 0.5	9 mm/M 3/3.5 x 0.6
Rated data according to IEC 60 947-7-1				
Rated voltage/current/cross-section		400 V/32 A/4 mm ²	250 V/24 A/2.5 mm ²	500 V/6.3 A ¹ /4 mm ²
Rated impulse voltage VDE 0110/1.89/pollution severity		6 kV/3	4 kV/3	6 kV/3
Further technical data				
Tightening torque range Nm		0.5...1.0	0.4...0.6	0.5...1.0
Torque setting with electric screwdriver type DMS 2		2	1	2
Clampable conductor				
Solid H07V-U mm ²		0.5...6	0.5...4	0.5...4
Stranded H07V-R mm ²		1.5...4	1.5...2.5	1.5...4
Flexible H07V-K mm ²		0.5...4	0.5...2.5	0.5...4
Flexible H07V-K and ferrule DIN 46 228/1 mm ²		0.5...4	0.5...2.5	0.5...2.5
Flexible H07V-K and ferrule with plastic insul. collar mm ²		0.5...4	0.5...2.5	0.5...2.5
Max. clamping range in mm ² /plug gauge acc. to IEC 60 947-1 Size		0.33...4.0 / A3	0.13...4.0 / A3	0.13...4.0 / A3
Continuous current rating of cross-connection 2-pole A		32	24	(QB 2...4) 10
Continuous current rating of cross-connection multipole A		32	24	
Rated data according to UL/CSA				
Voltage/current/conductor size UL		300/250 V/27 A/22...12 AWG	300 V/10 A/22...12 AWG	300 V/10 A/22...12 AWG
Voltage/current/conductor size CSA		300 V/10 A/22...12 AWG	300 V/10 A/26...10 AWG	300 V/6.3 A/26...12 AWG
Ordering data		Type Cat. No. Qty.	Type Cat. No. Qty.	Type Cat. No. Qty.
PA		AKB 4 PA 0321560000 100	AKZ 2.5 0697160000 100	ASK 1 PA 0376960000 100
Blue PA		0321580000 100	AKZ 2.5 0697180000 100	
Direct mounting with BB 1 please order separately			Direct mounting with BB 4 please order separately	(for G fuse inserts 5x 20 without indicator)

End plate/attachment bracket (thickness mm)

AP	PA	BB 1 (7) 0320560000 50	BB 4 (7.5) 0697560000 50	
	Blue PA	BS M 3 x 15 0359000000 100		
			AP (2.5) 0697360000 50	AP (1.5) 0380360000 20
			AP (2.5) 0697380000 50	

Partition (thickness mm)

TW PA (0.5) 0348260000 50		
---------------------------	--	--

Small partition

TSch 4 0363360000 100		
-----------------------	--	--

Cross-connection

Q 2 0336400000 50	Q 2 0368200000 50	QB 2 ¹⁾ 0461100000 50
Q 3 0336500000 50	Q 3 0368300000 50	QB 3 ¹⁾ 0461200000 50
Q 4 0336600000 50	Q 4 0368400000 50	QB 4 ¹⁾ 0461300000 50
Q 10 0368600000 20	Q 10 0368500000 20	

Switchable cross-connection link

VL 2 0446700000 50		
VH 10 0446600000 50		
BS M 2.5x14 0266800000 100		

Test plug/socket

StB 8.5 0215700000 50	StB 8.5 0215700000 50	
PS 2.3 0180400000 20	PS 2.3 0180400000 20	

Cover/contact sleeve

AD 4 0303400000 50		
BSKM 2.5x18 0303300000 100		
		K sleeve 0553300000 100

Marking tags

DEK	Print	DEK 6 see "Accessories"	DEK 5 see "Accessories"	DEK 6.5 see "Accessories"
-----	-------	-------------------------	-------------------------	---------------------------

Mounting rails, end brackets, further marking material see "Accessories"

¹⁾ The conductor cross-section is reduced to max. 2.5 mm² when QB is used.

* With contact sleeve 19 A

Feed-through terminals

ADK 1 T



6/22/50.5
19.5...21.9
9 mm/M 3/3.5 x 0.6
400 V/8 A/4 mm ²
6 kV/3
0.5...1.0
2
0.5...4
1.5...4
0.5...4
0.5...2.5
0.5...2.5
0.13...4.0 / A3
10
300/250 V/10 A/26...12 AWG
300 V/15 A/26...12 AWG
1.5 Qty. 2.5 Qty.

0372260000 100
0366360000 100

Type	Cat. No.	Qty.
AP (3)	0476260000	50


TW (0.5) 0442300000 50

PS 2.3 0180400000 20
StB 8.5 0215700000 50

SST 1.2 0306600000

DEK 6 see "Accessories"

AKZ 2.5 K



0109160000 solder tag

5/26/45.5
22.4...23.6
7 mm/M 2.5/3.0 x 0.5
250 V/8 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...2.5
0.5...2.5
0.13...2.5 / A2
10
300/250 V/10 A/22...12 AWG
300 V/10 A/26...10 AWG
Cat. No. Qty.
0109160000 solder tag 100

0108960000 100

Type	Cat. No.	Qty.
AP (3)	0697260000	50

TW (1.5) 0318560000 20

PS 2.3 0180400000 20
StB 8.5 0215700000 50

IH 2.8 0386060000 100

DEK 5 see "Accessories"

ADK 1 FT



6/22/52
24
11 mm/M 2.5/3.5 x 0.6
250 V/10 A/2.5 mm ²
4 kV/3
0.4...0.6
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...1.5
0.5...1.5
0.33...2.5 / A2
300 V/3 A/22...14 AWG
Cat. No. 1.5 Qty.

0176960000 100


Type	Cat. No.	Qty.
AP (3)	0476260000	50

TW (0.5) 0442300000 50

SST 1.2 0306600000

DEK 6 see "Accessories"

MK 2/12



86/15/23
8
5
63 V/20 A/2.5/1.5 mm ²
1.5 kV/3
0.4...0.45
1
0.5...2.5
1.5...2.5
0.5...2.5
0.5...2.5
0.5...2.5
0.2...2.5 / A2
300 V/10 A/24...12 AWG
300 V/10 A/24...12 AWG
Cat. No. Qty.

0241460000 50

Type	Cat. No.	Qty.
------	----------	------

SN 0200100000 500

BSTb 28/12 024570... 50
BSTo 28/12 024560... 50

Rack-mounted interface systems



Dimensions														
Width/length/height (mm)		40.2/110.6/29.5			42/46.5/170/28			40/45.5/162.5/110			40/45.5/228.5/110			
Hole spacing/mounting dimensions		mm 101.6/20.3			147			151/90			217/90			
Insulation stripping length/clamping screw/screwdriver blade		10 mm/M 2.5/3.5 x 0.6												
Rated data														
Rated voltage*/current/cross-section		250* V/6 A/1.5/1 mm²			1000* V/16 A/2.5/1.5 mm²			400* V/16 A/2.5/1.5 mm²			400* V/16 A/2.5/1.5 mm²			
Rated impulse voltage VDE 0110/1.89/pollution severity		4 kV/3			6 kV/3			6 kV/3			6 kV/3			
Further technical data														
Tightening torque range		Nm 0.4...0.7												
Torque setting with electric screwdriver type DMS 2		1												
Clampable conductor														
Solid H07V-U		mm² 0.5...2.5												
Stranded H07V-R		mm² 1.5												
Flexible H07V-K		mm² 0.5...1.5												
Flexible H07V-K and ferrule DIN 46 228/1		mm² 0.5...1.5												
Flexible H07V-K and ferrule with plastic insul. collar		mm² 0.5...1.5												
Plug gauge acc. to IEC 60 947-1		Size A1												
Ordering data		Version	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
Pin 1.0 x 1.0		PA	TOP 1.5 F/32	0443160000 ¹⁾	5									
Pin 0.8 x 2.8 (push-on), unprinted		PA												
Pin 0.8 x 2.8 (push-on), printed, 1...32		PA												
Pin 0.8 x 2.8 (push-on), printed, 1...32, blue		PA												
6 x plug (6.3 x 0.8)		KrG				SP 10 FF	0456220000	10	SP 60 FF ⁴⁾	0340320000	1	SP 90 FF**	0248120000	1
6 x plug (6.3 x 0.8), blue		KrG							SP 60 FF ⁴⁾	0340370000	1			
6 x plug (6.3 x 0.8), bzw. 12 x 2.8 x 0.8 slotted		KrG										SP 90 FF**	0608920000	1
6 x plug (6.3 x 0.8), bzw. 12 x 2.8 x 0.8 slotted, blue		KrG												
3 x plug (6.3x0.8)/1 x solder per pole		KrG							SP 60 LF ⁴⁾	0343720000	1	SP 90 LF**	0248220000	1
3 x plug (6.3x0.8)/1 x solder per pole, blue		KrG							SP 60 LF ⁴⁾	0343770000	1			
3 x plug (6.3 x 0.8 bzw. 6 x 2.8 x 0.8)/1 x solder		KrG							SP 60 LF ⁵⁾	0124520000	1			
3 x plug (6.3 x 0.8 bzw. 6 x 2.8 x 0.8)/1 x solder, blue		KrG							SP 60 LF ⁵⁾	0124570000	1	printed:		
2 x direct connection, 1 x Pin 0.8 x 1.6		PA										** A...F / 1...15		
									printed:					
									⁴⁾ A...F / 1...10					
									⁵⁾ 00...50 / 1...10					
Insulation sleeves		Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	Type	Cat. No.	Qty.	
		IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100	IH 2.8	0386060000	100	
					IH 6.3	0386260000	100	IH 6.3	0386260000	100	IH 6.3	0386260000	100	
Marking tags		Print												
dekafix		for group markers				FW 5	see "Accessories"							
Mounting rails, end brackets, further marking material see "Accessories"														

* Insulation sleeves are to be used for tab connections to maintain the rated voltage.

1) Rated voltage 125 V

2) FF = Tab- Tab
3) LF = Solder - Tab

Rack-mounted interface systems

RV 8/8 long



RV 8/8 short



RV 8/9 long



RV 8/9 short



Technical data acc. to VDE

Pin versions (intern)

0.8 x 2.4/1 x 1
0.8 x 2.4/0.8 x 2.4

Plug adapter



1-pole

for connection of solid and flexible conductors from 0.75 to 1.5 mm² directly on to the pins of the interface system.


125 V/-/-			125 V/-/-		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0468860000	1		0467160000	1
	0468960000	1		0467260000	1
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
DSA 1	0576060000	50	DSA 1	0576060000	50

105 V/-/-			125 V/-/-		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
	0498960000	1		0444060000	1
	0499060000	1		0545960000	1
with shield pins			with shield pins		
Type	Cat. No.	Qty.	Type	Cat. No.	Qty.
DSA 1	0576060000	50	DSA 1	0576060000	50

RV 8/20 short



RV 8/56 short

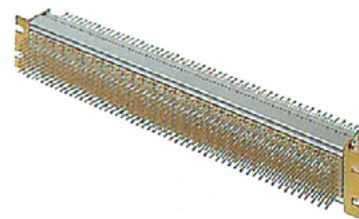

Technical data acc. to VDE


Pin versions (internal)

0.8 x 2.4/1 x 1
0.8 x 2.4/0.8 x 2.4

Additional versions on request

125 V/-/-		
Cat. No.	Qty.	
0544460000	1	

125 V/-/-		
Cat. No.	Qty.	
0462260000	1	
0533060000	4	

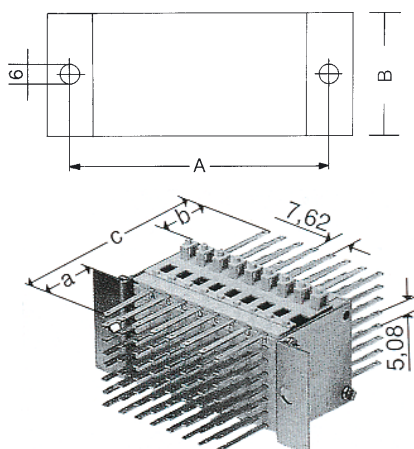

Type	Size A	Size B
	in mm	in mm
RV 8/8 K	81	40.64
RV 8/9 K	89	40.64
RV 8/8 L	93	40.64
RV 8/9 L	100	40.64
RV 8/20 K	187,62/31.5	63
RV 8/56 K	460/31.5	63

(K = short/L = long)

Cat. No.	RV	a	b	c
0468860000	8/8 L	26	20	200
0468960000	8/8 L	26	26	206
0467160000	8/8 K	26	20	84
0467260000	8/8 K	26	26	89
0119360000	8/20 K	26	20	84
0544460000	8/20 K	26	26	89
0462260000	8/56 K	26	20	84
0533060000	8/56 K	26	26	89

Mounting rails, end brackets, further marking material see "Accessories"

SAK-series



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.