

4


3

2


1

DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG 2006
COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
	B4	REVISED. (ECR-15-011655)		17AUG15	S.C.	H.L.

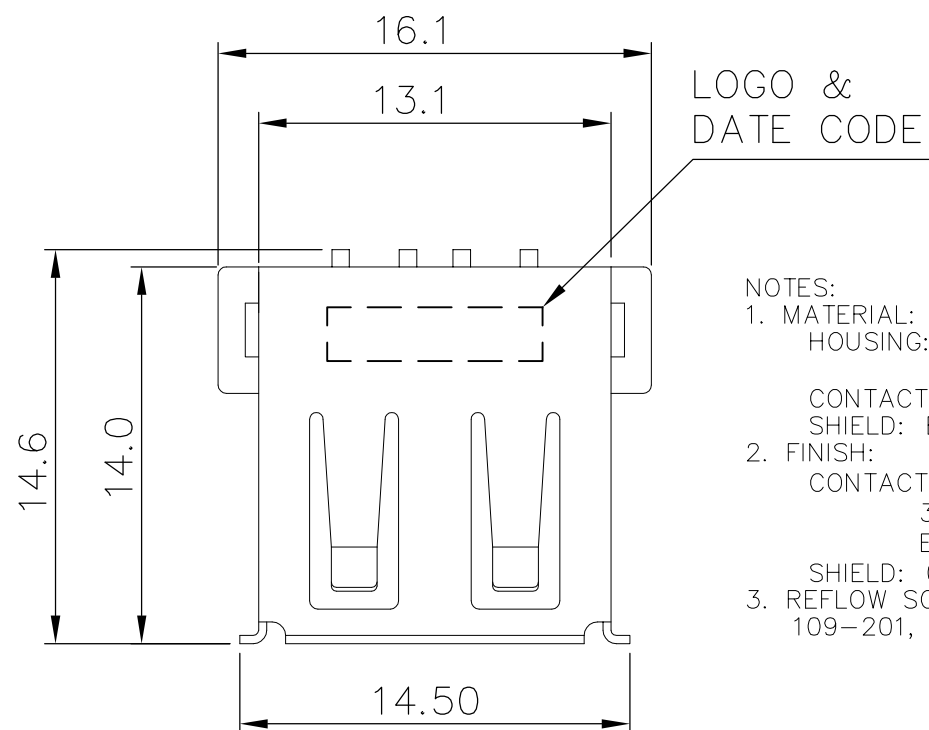


- NOTES:
- MATERIAL:
HOUSING: THERMOPLASTIC WITH 30% GF, UL 94V-0, COLOR: (SEE TABLE).
CONTACTS: PHOSPHOR BRONZE, THICKNESS=0.25mm..
SHIELD: BRASS, THICKNESS=0.30mm.
 - FINISH:
CONTACT: 0.762 μ m [30 μ "] MIN. GOLD PLATED ON CONTACT AREA.
3.048 μ m [120 μ "] MIN. BRIGHT-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED 1.27 μ m [50 μ "] MIN. NICKEL.
SHIELD: 0.762 μ m [30 μ "] MIN. NICKEL OVER 0.762 μ m [30 μ "] MIN.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC. 109-201, CONDITION B.

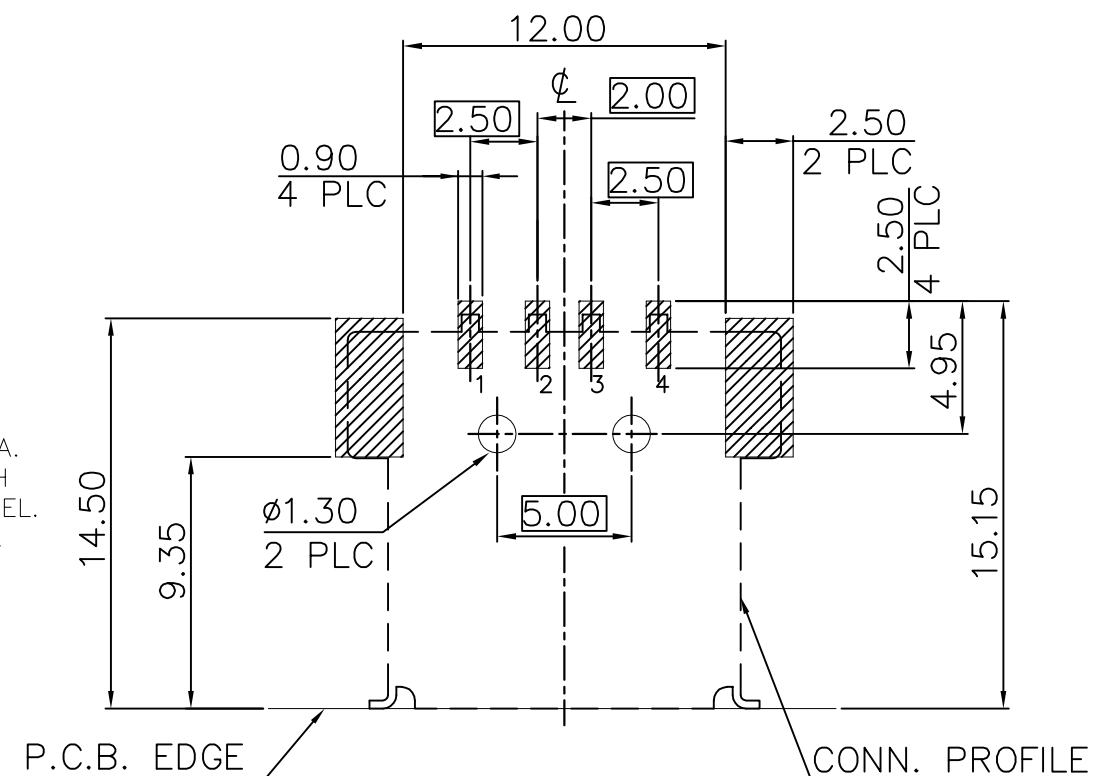



RECOMMENDED P.C.B. LAYOUT (THICKNESS=1.6mm)
(TOP VIEW) TOLERANCES: ± 0.05

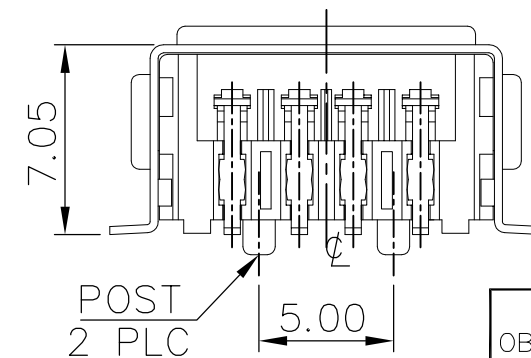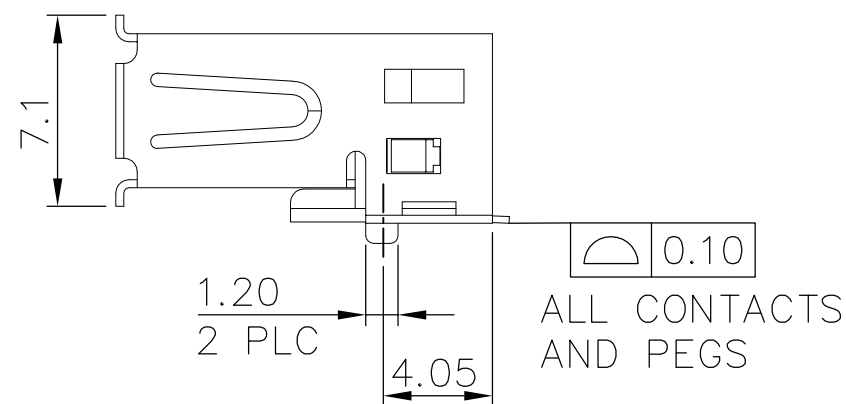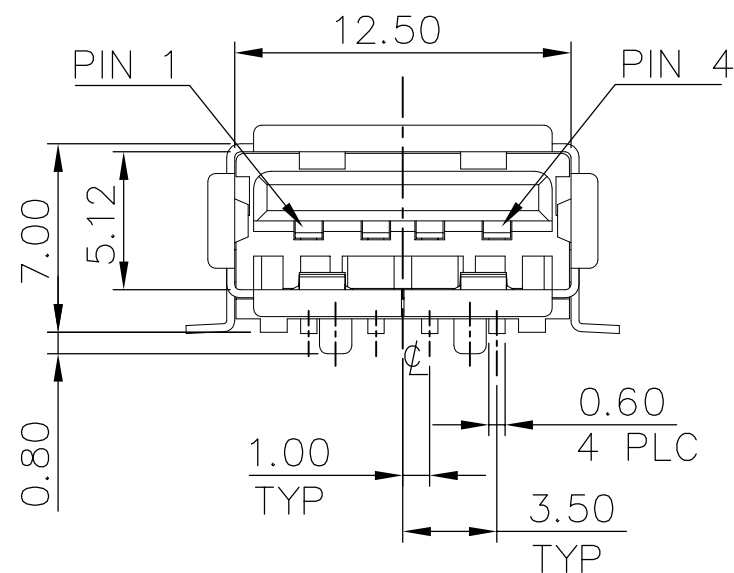

OBSOLETE	W/	BLACK	1-1734082-2
		WHITE	1-1734082-1
OBSOLETE	W/O	BLACK	1734082-2
OBSOLETE		WHITE	1734082-1
	POST	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU	200CT2005	 TE Connectivity				
		CHK S. HSU	200CT2005					
DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	APVD W.J. KE	200CT2005	NAME				
		PRODUCT SPEC 108-57505	USB CON, RCPT, ASS'Y, R/A SMT, A TYPE					
		APPLICATION SPEC 501-57579						
MATERIAL		FINISH	WEIGHT 1.82 GRAMS	SIZE A3	CAGE CODE 00779	DRAWING NO C=1734082	RESTRICTED TO	
SEE NOTE		SEE NOTE	CUSTOMER DRAWING	SCALE —				SHEET 1 OF 4





4

3

2

1

DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG 2006

COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

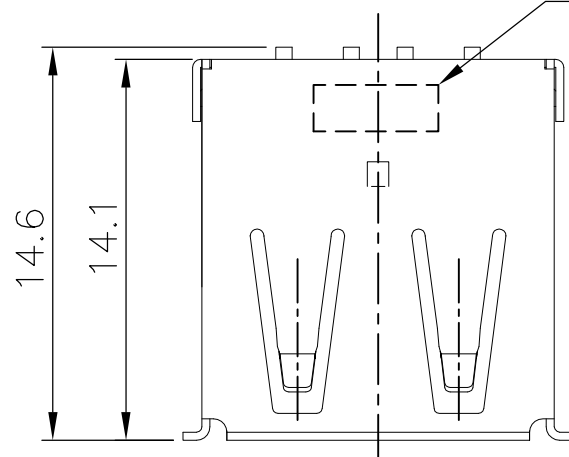LOGO &
DATE CODE

NOTES:

1. MATERIAL:

HOUSING: THERMOPLASTIC WITH 30% GF, UL 94V-0, COLOR: BLACK.

CONTACTS: PHOSPHOR BRONZE, THICKNESS=0.25mm.


SHIELD: BRASS, THICKNESS=0.30mm.

2. FINISH:



CONTACT: 0.762 μ m [30 μ "] MIN. GOLD PLATED ON CONTACT AREA.3.048 μ m [120 μ "] MIN. BRIGHT-TIN ON SOLDER TAIL, WITHENTIRE CONTACT UNDERPLATED 1.27 μ m [50 μ "] MIN. NICKEL.SHIELD: 0.762 μ m [30 μ "] MIN. NICKEL OVER 0.762 μ m [30 μ "] MIN.

3. REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC.

109-201, CONDITION B.

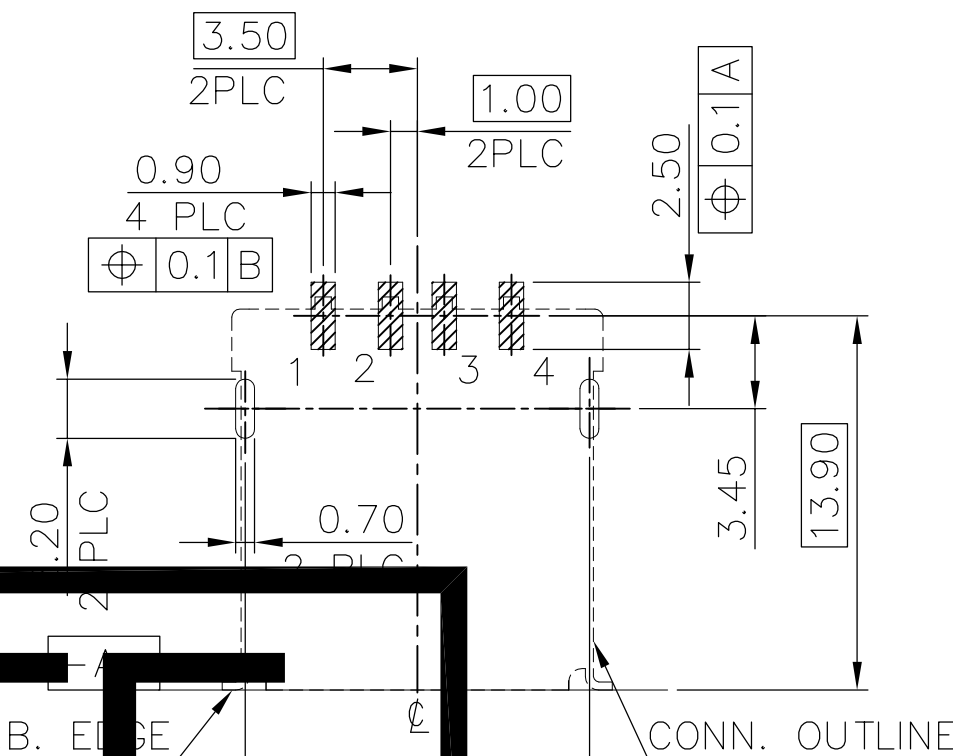

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)

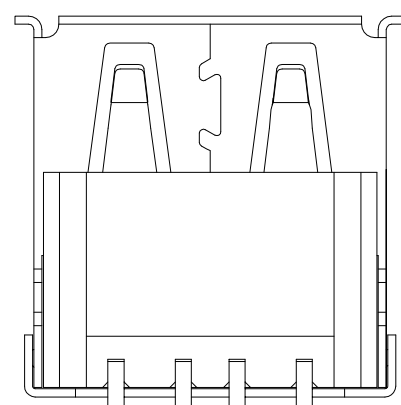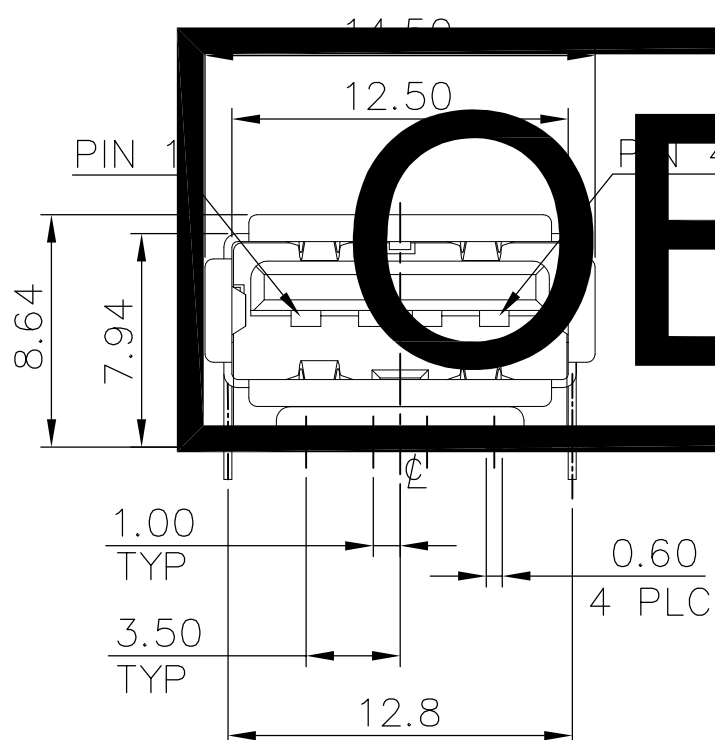(COMPONENT SIDE) TOLERANCE ± 0.05 ALL CONTACTS
AND PEGS

2-1734082-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CON, RCPT, ASS'Y, R/A SMT, A TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C=1734082

SCALE


SHEET

2 OF 4

REV B4

DIMENSIONS:

MM




MATERIAL


SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC $\pm -$
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC $\pm -$
ANGLES $\pm 3^\circ$

FINISH

SEE NOTE





4

3

2

1

DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG 2006

COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR





DESCRIPTION

DATE

DWN


APVD

SEE SHEET 1.

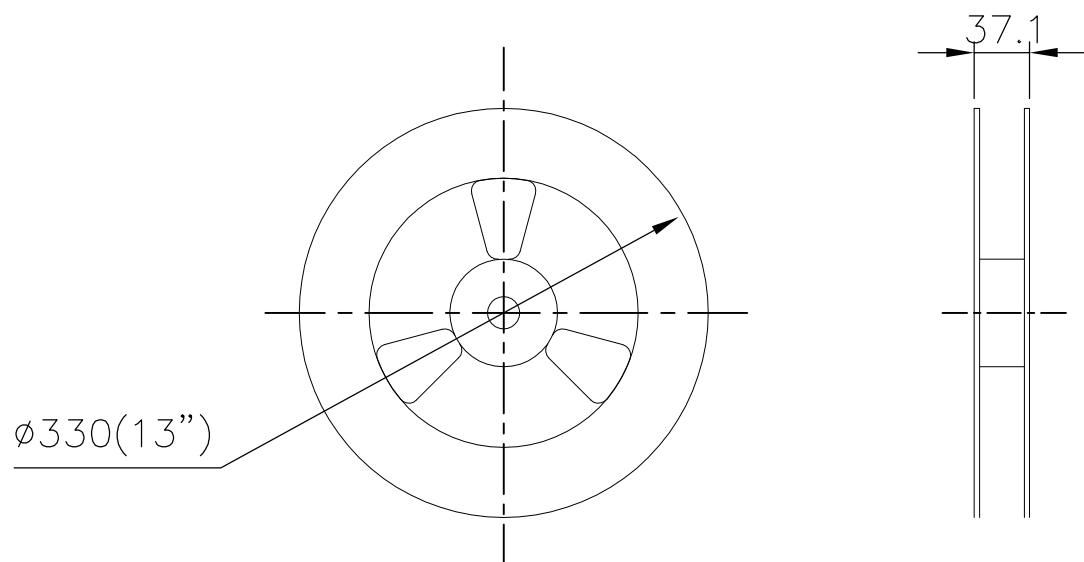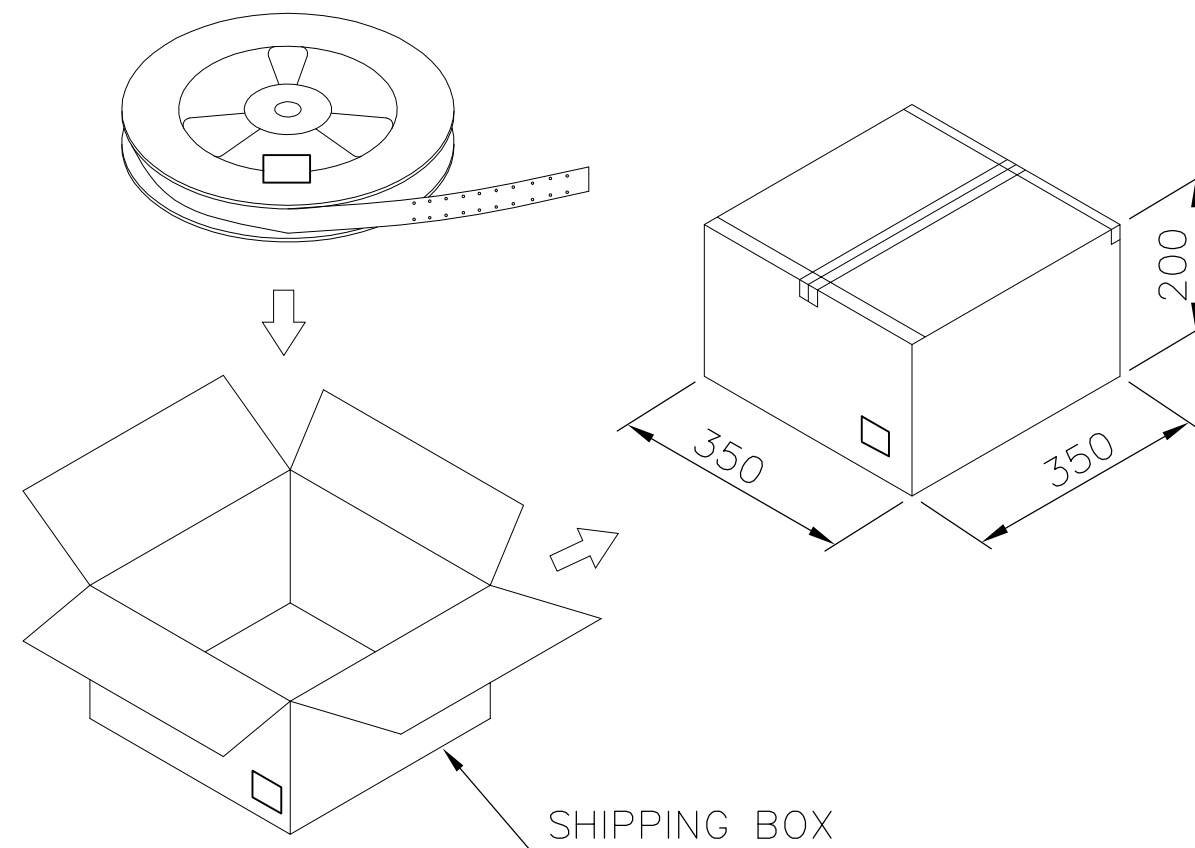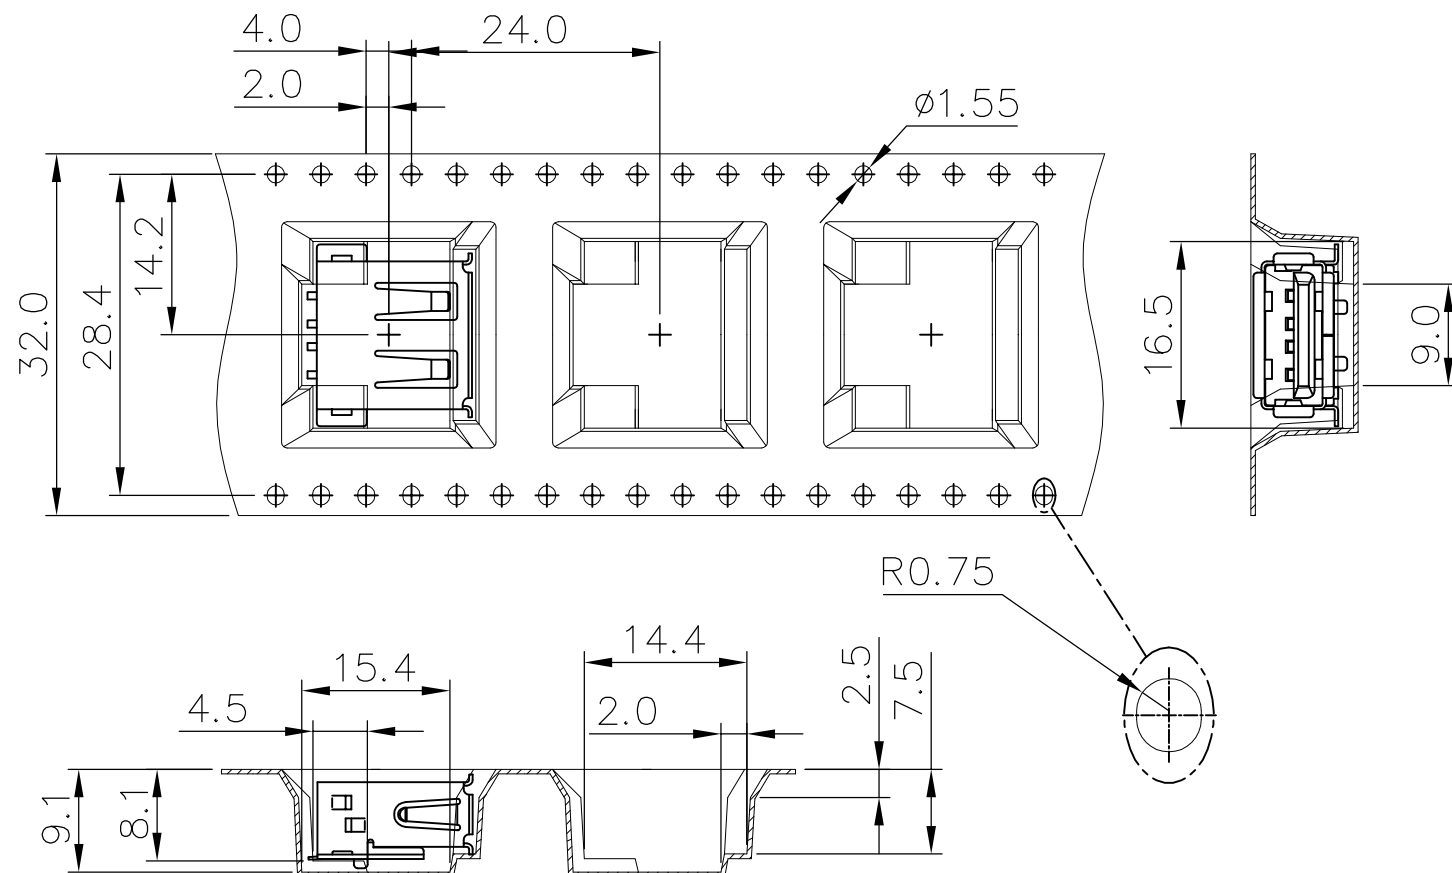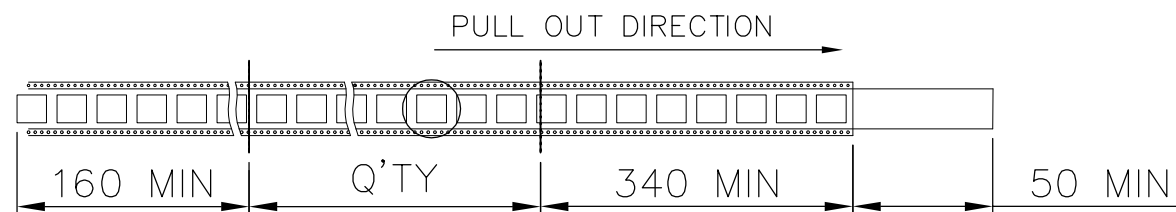

300	5	1500	5.36	2.73	1-1734082-2
					1-1734082-1
					1734082-2
					1734082-1
PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MMTOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CON, RCPT, ASS'Y, R/A SMT, A TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO


A300779 C=1734082


SCALE

SHEET

3 OF 4

REV B4





4

3

2

1

DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG 2006

COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

PULL OUT DIRECTION

160MIN

Q'TY

340MIN

50MIN

①

②

③

④

1.75

4.0

2.0

20.0

Ø1.50

32.0

28.4

14.2

7.33

9.05

10.25

SHIPPING BOX

350


350

350

Ø330(13")

37.1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MMTOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CON, RCPT, ASS'Y, R/A SMT, A TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C=1734082


SCALE

SHEET

4 OF 4

REV B4

0-19 REV 31MAR2000





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.