




## Thunderbolt IGBT®

The Thunderbolt IGBT® is a new generation of high voltage power IGBTs. Using Non-Punch Through Technology the Thunderbolt IGBT® offers superior ruggedness and ultrafast switching speed.

- Low Forward Voltage Drop
- Low Tail Current
- Avalanche Rated
- RoHS Compliant 
- High Freq. Switching to 150KHz
- Ultra Low Leakage Current
- RBSOA and SCSOA Rated



### MAXMUM RATINGS

Symbol	Parameter	APT60GT60BR_SRG	Unit
$V_{CES}$	Collector-Emitter Voltage	600	Volts
$V_{GE}$	Gate Emitter Voltage	±20	
$I_{C1}$	Continuous Collector Current @ $T_c = 25^\circ\text{C}$ <sup>4±</sup>	100	Amps
$I_{C2}$	Continuous Collector Current @ $T_c = 105^\circ\text{C}$	60	
$I_{CM}$	Pulsed Collector Current <sup>1</sup> @ $T_c = 25^\circ\text{C}$	360	
$I_{LM}$	RBSOA Clamped Inductive Load Current $R_g = 11\Omega$ , $T_c = 25^\circ\text{C}$	360	
$E_{AS}$	Single Pulse Avalanche Energy <sup>2</sup>	65	mJ
$P_D$	Total Power Dissipation	500	Watts
$T_J, T_{STG}$	Operating and Storage Junction Temperature Range	-55 to 150	°C
$T_L$	Max. Lead Temp. for Soldering: 0.063" from Case for 10 Sec.	300	

### STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$BV_{CES}$	Collector-Emitter Breakdown Voltage ( $V_{GE} = 0V, I_C = 0.5mA$ )	600			Volts
$V_{GE(TH)}$	Gate Threshold Voltage ( $V_{CE} = V_{GE}, I_C = 500\mu A, T_j = 25^\circ\text{C}$ )	3	4	5	
$V_{CE(ON)}$	Collector-Emitter On Voltage ( $V_{GE} = 15V, I_C = I_{C2}, T_j = 25^\circ\text{C}$ )	1.6	2.2	2.5	
	Collector-Emitter On Voltage ( $V_{GE} = 15V, I_C = I_{C2}, T_j = 125^\circ\text{C}$ )			2.8	
$I_{CES}$	Collector Cut-off Current ( $V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 25^\circ\text{C}$ )			80	μA
	Collector Cut-off Current ( $V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 125^\circ\text{C}$ )			2000	
$I_{GES}$	Gate-Emitter Leakage Current ( $V_{GE} = \pm 20V, V_{CE} = 0V$ )			±100	nA



CAUTION: These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

**DYNAMIC CHARACTERISTICS**
**APT60GT60BR\_SRG**

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
$C_{ies}$	Input Capacitance	<b>Capacitance</b> $V_{GE} = 0V$ $V_{CE} = 25V$ $f = 1\text{ MHz}$		3125	3590	pF
$C_{oes}$	Output Capacitance			310	450	
$C_{res}$	Reverse Transfer Capacitance			180	310	
$Q_g$	Total Gate Charge <sup>3</sup>	<b>Gate Charge</b> $V_{GE} = 15V$ $V_{CC} = 0.5V_{CES}$ $I_C = I_{C2}$		275	410	nC
$Q_{ge}$	Gate-Emitter Charge			19	30	
$Q_{gc}$	Gate-Collector ("Miller") Charge			120	180	
$t_{d(on)}$	Turn-on Delay Time	<b>Resistive Switching (25°C)</b> $V_{GE} = 15V$ $V_{CC} = 0.5V_{CES}$ $I_C = I_{C2}$ $R_G = 10\Omega$		20	40	ns
$t_r$	Rise Time			95	190	
$t_{d(off)}$	Turn-off Delay Time			315	470	
$t_f$	Fall Time			245	490	
$t_{d(on)}$	Turn-on Delay Time	<b>Inductive Switching (150°C)</b> $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 10\Omega$ $T_J = +150^\circ C$		25	50	ns
$t_r$	Rise Time			59	120	
$t_{d(off)}$	Turn-off Delay Time			430	650	
$t_f$	Fall Time			65	130	
$E_{on}$	Turn-on Switching Energy			1.6	3.2	
$E_{off}$	Turn-off Switching Energy		2.4	4.8	mJ	
$E_{ts}$	Total Switching Losses		4.0	8.0		
$t_{d(on)}$	Turn-on Delay Time	<b>Inductive Switching (25°C)</b> $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 5\Omega$ $T_J = +25^\circ C$		26	50	ns
$t_r$	Rise Time			63	125	
$t_{d(off)}$	Turn-off Delay Time			395	590	
$t_f$	Fall Time			68	140	
$E_{ts}$	Total Switching Losses			3.4	7.0	
$g_{fe}$	Forward Transconductance	$V_{CE} = 20V, I_C = I_{C2}$	4			S

**THERMAL AND MECHANICAL CHARACTERISTICS**

Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case			0.25	°C/W
$R_{\theta JA}$	Junction to Ambient			40	
$W_T$	Package Weight		0.22		oz
			6.1		gm
Torque	Mounting Torque (using a 6-32 or 3mm Binding Head Machine Screw)			10	lb•in
				1.1	N•m

① Repetitive Rating: Pulse width limited by maximum junction temperature.

②  $I_C = I_{C2}$ ,  $R_{GE} = 25\Omega$ ,  $L = 36\mu H$ ,  $T_J = 25^\circ C$

③ See MIL-STD-750 Method 3471

④ The maximum current is limited by lead temperature.

Microsemi Reserves the right to change, without notice, the specifications and information contained herein.

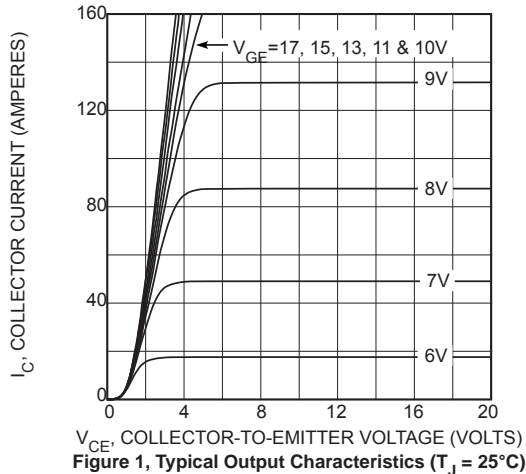


Figure 1, Typical Output Characteristics ( $T_J = 25^\circ\text{C}$ )

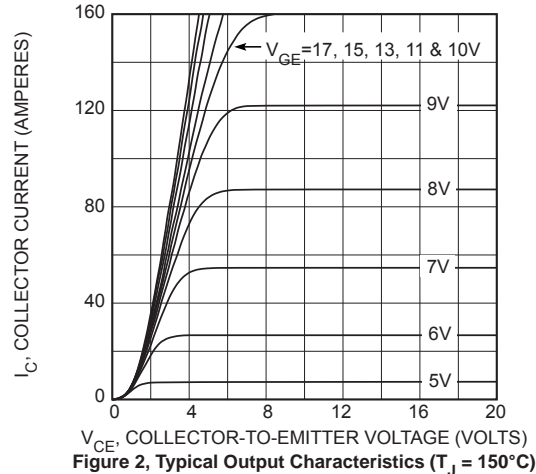


Figure 2, Typical Output Characteristics ( $T_J = 150^\circ\text{C}$ )

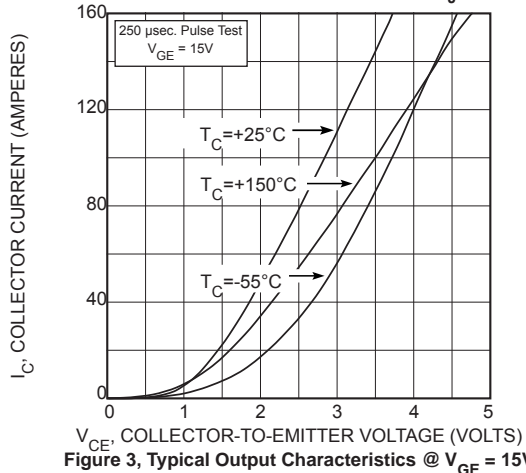


Figure 3, Typical Output Characteristics @  $V_{GE} = 15\text{V}$

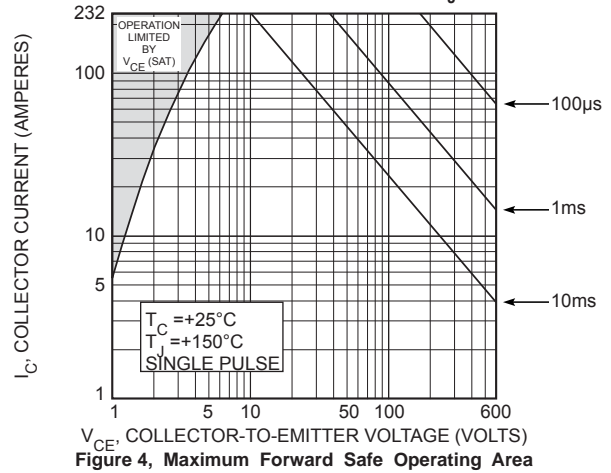


Figure 4, Maximum Forward Safe Operating Area

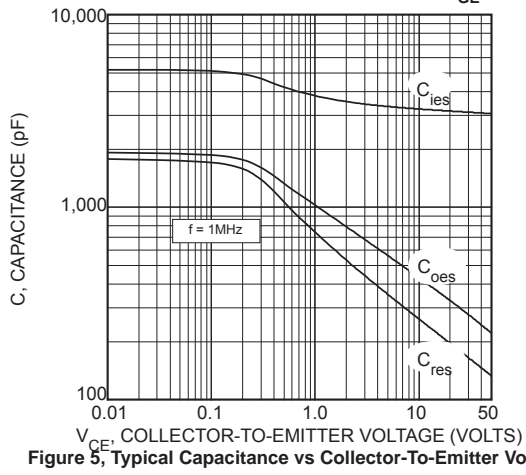


Figure 5, Typical Capacitance vs Collector-To-Emitter Voltage

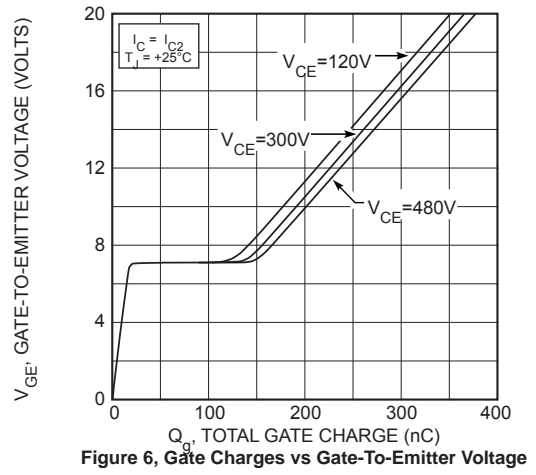


Figure 6, Gate Charges vs Gate-To-Emitter Voltage

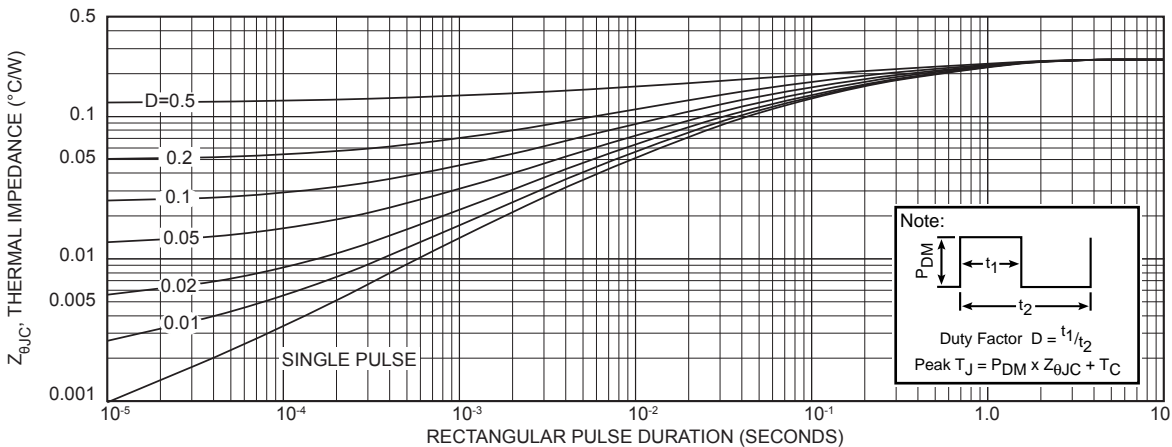


Figure 7, Maximum Effective Transient Thermal Impedance, Junction-To-Case vs Pulse Duration

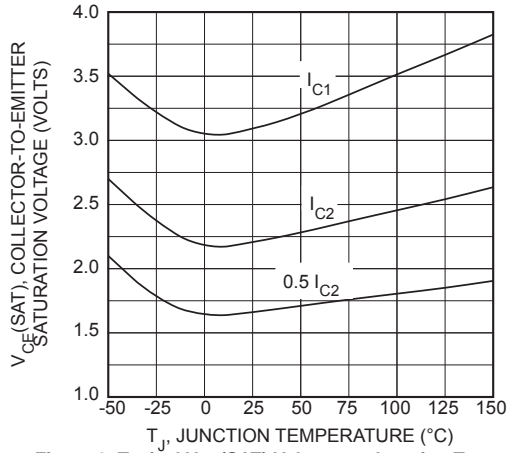


Figure 8, Typical  $V_{CE(SAT)}$  Voltage vs Junction Temperature

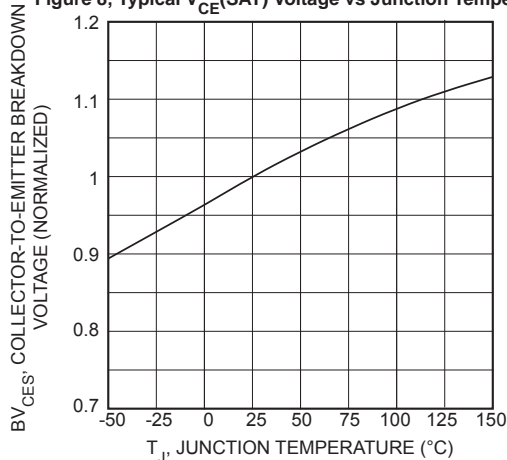


Figure 10, Breakdown Voltage vs Junction Temperature

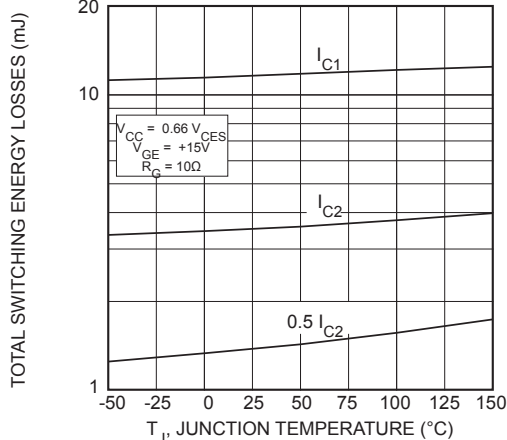


Figure 12, Typical Switching Energy Losses vs. Junction Temperature

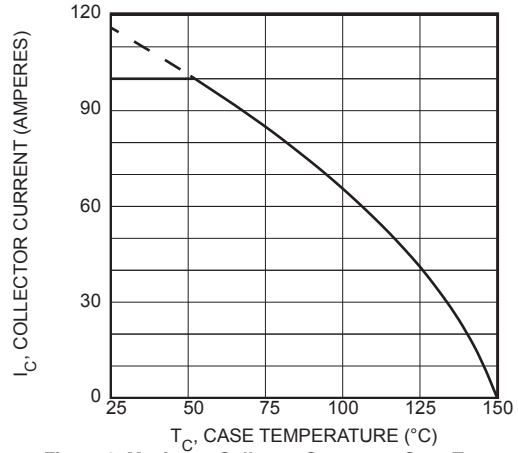


Figure 9, Maximum Collector Current vs Case Temperature

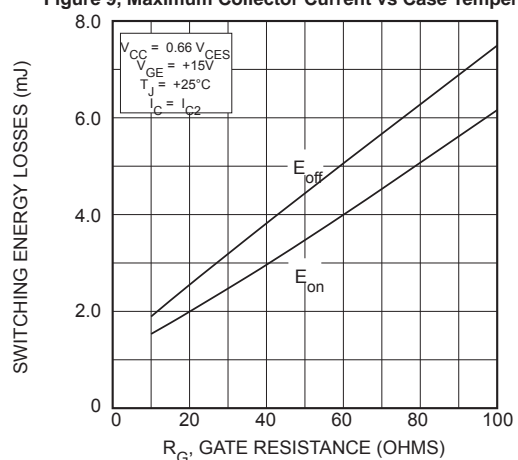


Figure 11, Typical Switching Energy Losses vs Gate Resistance

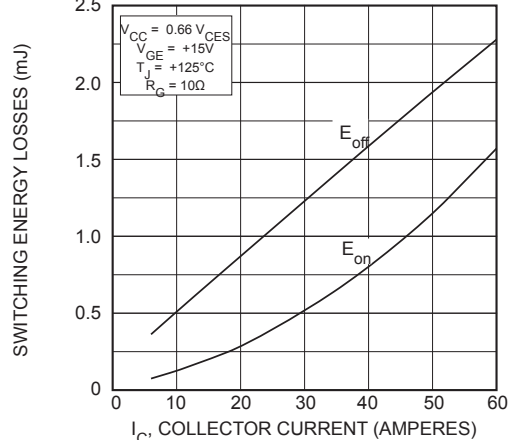


Figure 13, Typical Switching Energy Losses vs Collector Current

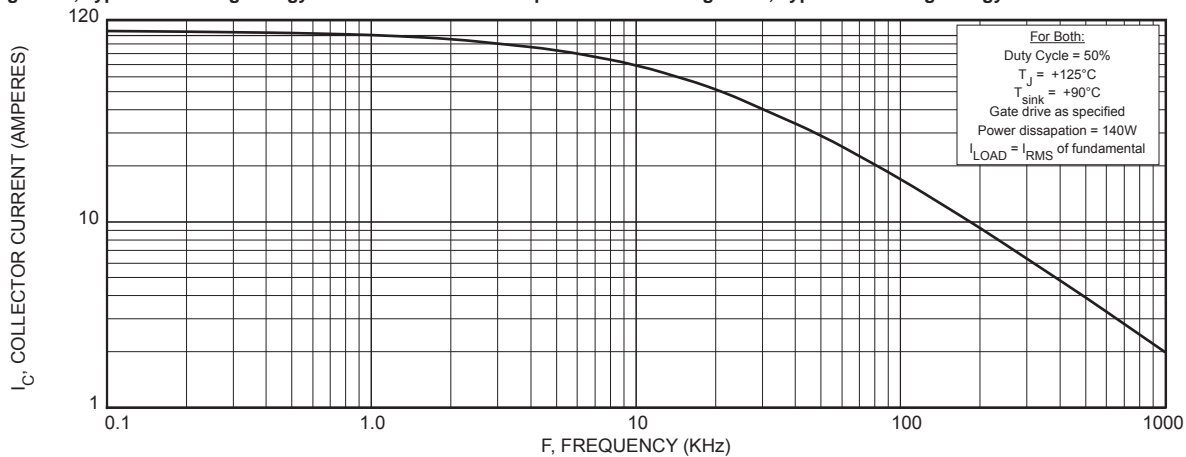


Figure 14, Typical Load Current vs Frequency

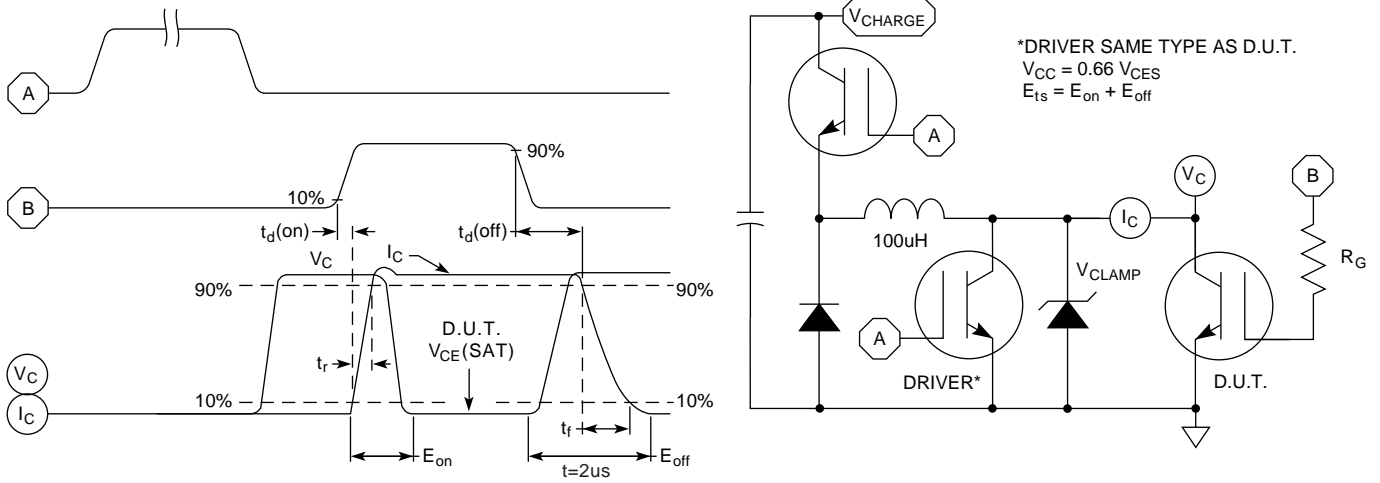


Figure 15, Switching Loss Test Circuit and Waveforms


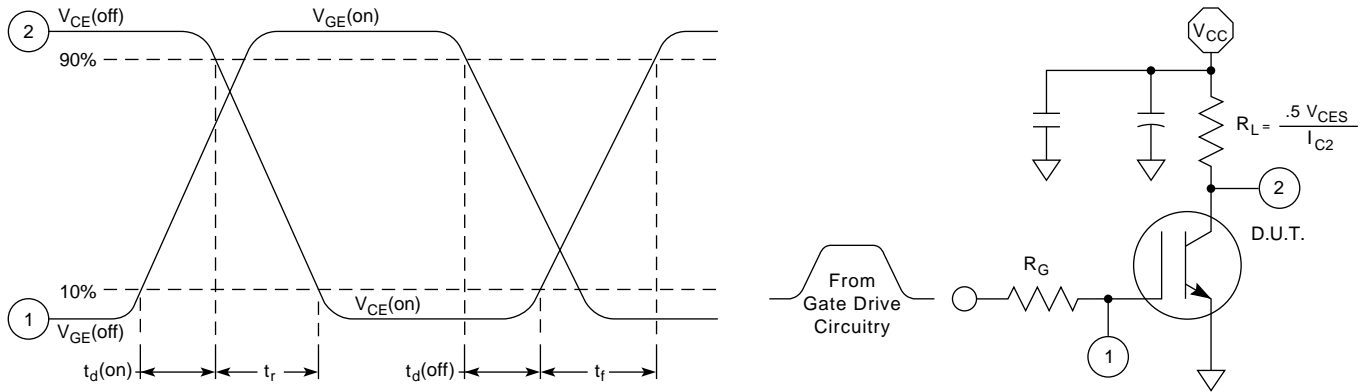


Figure 16, Resistive Switching Time Test Circuit and Waveforms


### TO-247 Package Outline

e1 SAC: Tin, Silver, Copper

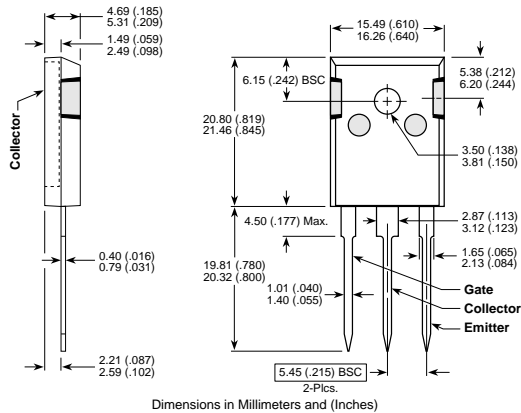

### D<sup>3</sup>PAK Package Outline

e3 SAC: Tin, Silver, Copper

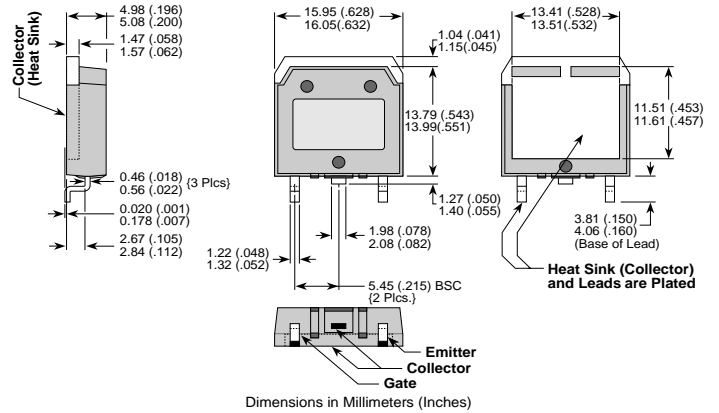



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.