




Silicon Dual Schottky Power Rectifier
30 Amp, 45 Volt
 Qualified per MIL-PRF-19500/608

Qualified Levels:
 JAN, JANTX, and
 JANTXV

DESCRIPTION

This Dual Schottky rectifier device is military qualified up to a JANTXV level for high-reliability applications. This TO-254 packaged product is available in three polarity options.



TO-254AA Package

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- JEDEC registered 1N6660.
- Hermetically isolated TO-254AA package.
- Available in standard, reverse, common cathode, common anode and doubler configurations.
- JAN, JANTX, and JANTXV qualifications are available per MIL-PRF-19500/608.
- RoHS compliant versions available (commercial grade only).

APPLICATIONS / BENEFITS

- High frequency operation.
- Low forward voltage drop.

MAXIMUM RATINGS @ T_A = +25 °C unless otherwise noted.

Parameters/Test Conditions	Symbol	Value per diode		Unit
		Die 1	Die 2	
Junction and Storage Temperature	T _J and T _{STG}	-65 to +150		°C
Thermal Resistance Junction-to-Case	R _{θJC}	Die 1	Die 2	°C/W
1N6660CCT1		1.65	1.65	
1N6660CAT1		2.8	2.8	
1N6660DT1		2.8	1.65	
Thermal Resistance Junction-to-Ambient	R _{θJA}	50		°C/W
Working Peak Reverse Voltage	V _{RWM}	45		V
DC Blocking Voltage	V _R	45		V
Surge Peak Forward Current @ tp = 8.3 ms half-sine wave	I _{FSM}	300		A
Average Rectified Output Current ⁽¹⁾	I _O	15		A

Note: 1. See [Figures 1 and 2](#) for derating of entire package (30 Amps).

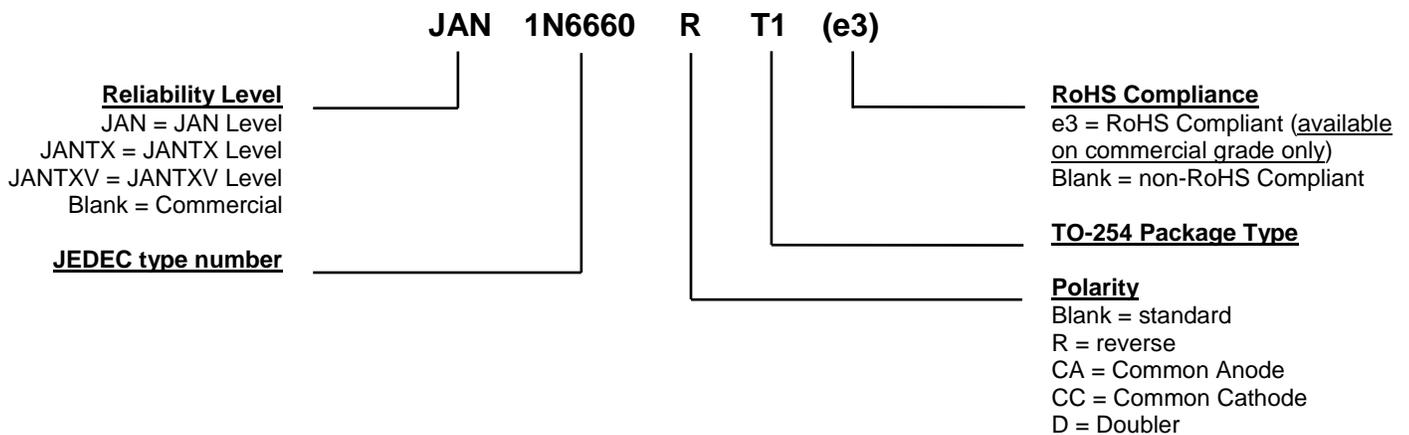
MSC – Lawrence
 6 Lake Street,
 Lawrence, MA 01841
 Tel: 1-800-446-1158 or
 (978) 620-2600
 Fax: (978) 689-0803

MSC – Ireland
 Gort Road Business Park,
 Ennis, Co. Clare, Ireland
 Tel: +353 (0) 65 6840044
 Fax: +353 (0) 65 6822298

Website:
www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Nickel plated CRS steel.
- TERMINALS: Ceramic feed-through, hot solder dip, Ni plated Alloy 52, copper core. "e3" available for commercial only (pure tin dip).
- MARKING: Part number, date code, and polarity symbol.
- POLARITY: See [Schematic](#) on last page.
- WEIGHT: Approximately 6.5 grams.
- See [Package Dimensions](#) on last page.

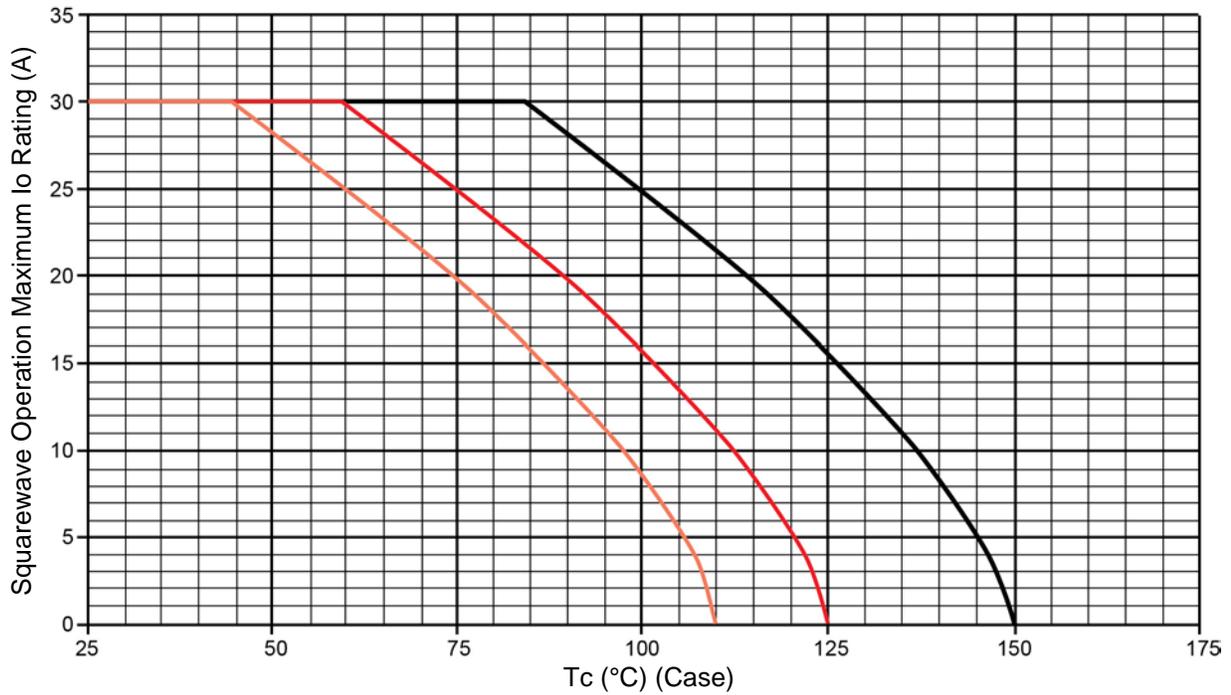
PART NOMENCLATURE

SYMBOLS & DEFINITIONS

Symbol	Definition
C	Capacitance: The capacitance in pF at a frequency of 1 MHz and specified voltage.
f	frequency
I _F	Forward Current: The dc current flowing from the external circuit into the anode terminal.
I _{FSM}	Surge Peak Forward Current: The forward current including all nonrepetitive transient currents but excluding all repetitive transients (ref JESD282-B)
I _O	Average Rectified Output Current: The Output Current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
I _R	Reverse Current: The dc current flowing from the external circuit into the cathode terminal at the specified voltage V _R .
V _{RWM}	Working Peak Reverse Voltage: The peak voltage excluding all transient voltages (ref JESD282-B). Also sometimes known historically as PIV.
V _F	Forward Voltage: A positive dc anode-cathode voltage the device will exhibit at a specified forward current.
V _R	Reverse Voltage: A positive dc cathode-anode voltage below the breakdown region.

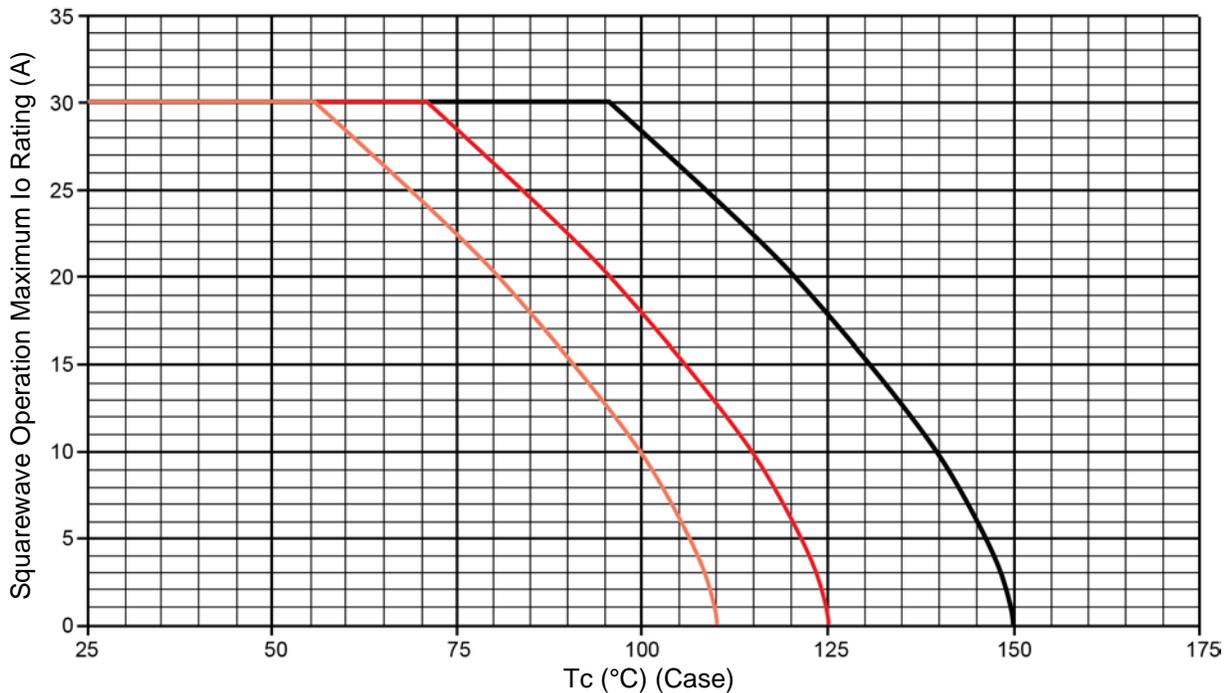
ELECTRICAL CHARACTERISTICS @ $T_A = +25\text{ }^\circ\text{C}$ unless otherwise noted

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
CHARACTERISTICS per Leg				
Forward Voltage* $I_F = 5\text{ A}$ $I_F = 15\text{ A}$ $I_F = 30\text{ A}$ $I_F = 15\text{ A}, T_A = -55\text{ }^\circ\text{C}$	V_F		0.55 0.75 1.00 0.80	V
Reverse Current $V_R = 45\text{ V}$ $V_R = 45\text{ V}, T_J = +125\text{ }^\circ\text{C}$	I_R		1.0 40	mA
Junction Capacitance $V_R = 5\text{ V}$ $f = 1\text{ MHz}, V_{SIG} = 50\text{ mV (p-p) (max)}$	C		2000	pF

* Pulse test: Pulse width 300 μsec , duty cycle 2%.

GRAPHS

FIGURE 1

Temperature-current derating curve (1N6660, 1N6660CCT1, entire package)


FIGURE 2

Temperature-current derating curve (1N6660R, 1N6660CAT1, 1N6660DT1, entire package)

GRAPHS

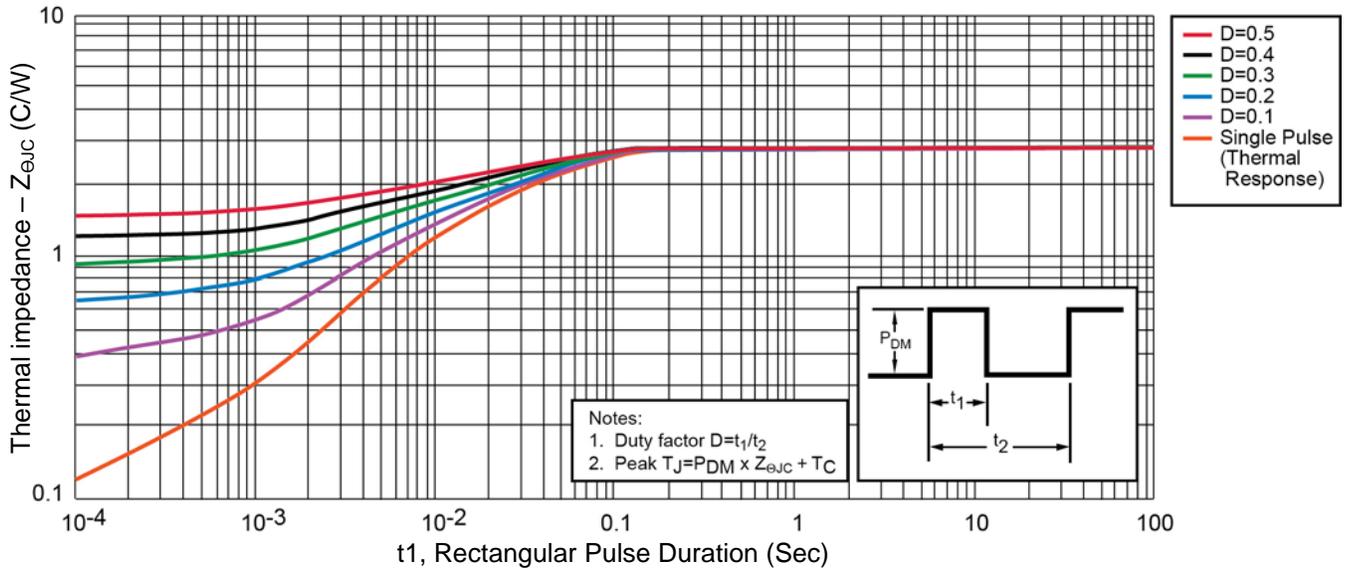


FIGURE 3
 Thermal impedance for each leg 1N6660CAT1, 1N6660DT1, die 1, and 1N6660R

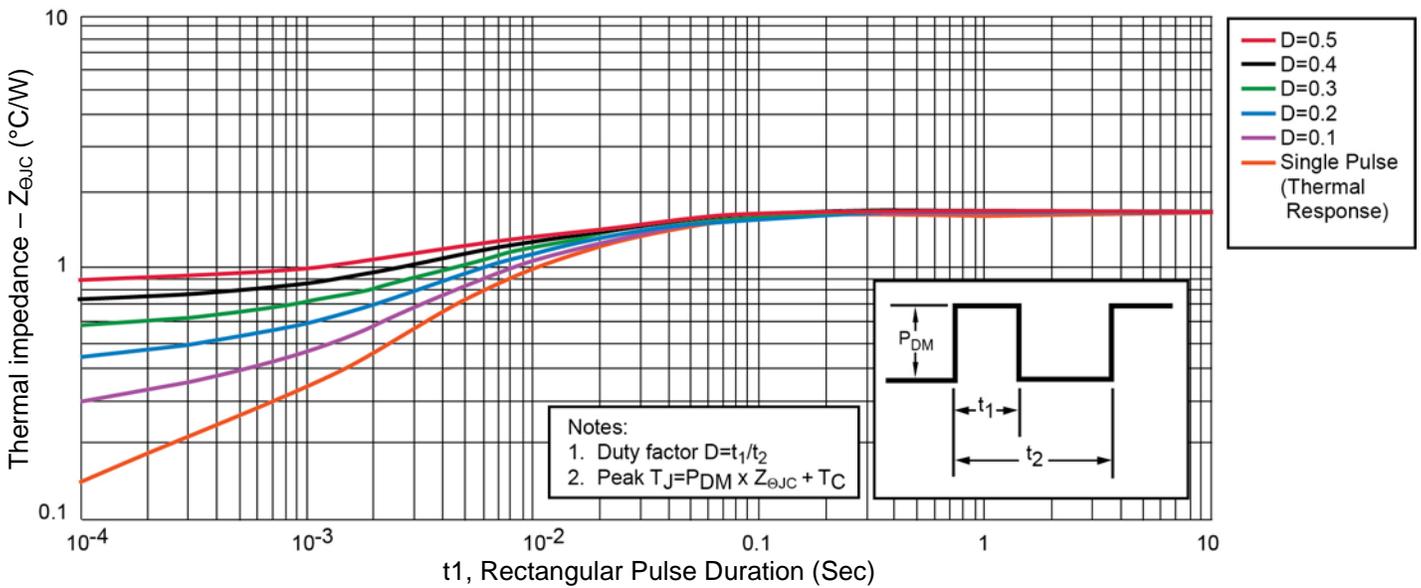
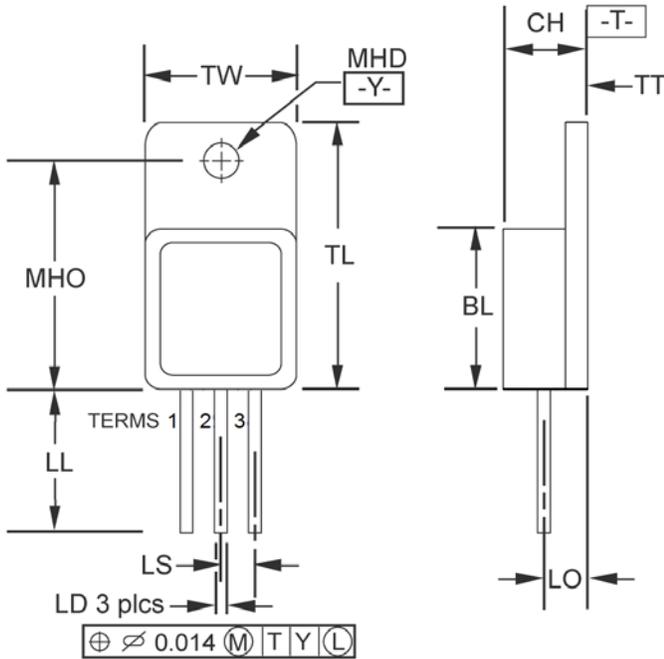


FIGURE 4
 Thermal impedance for each leg 1N6660CCT1, 1N6660DT1, die 2, and 1N6660

PACKAGE DIMENSIONS




Ltr	Dimensions			
	Inch		Millimeters	
	Min	Max	Min	Max
BL	0.535	0.545	13.59	13.84
CH	0.249	0.260	6.32	6.60
LD	0.035	0.045	0.89	1.14
LL	0.510	0.570	12.95	14.48
LO	0.150 BSC		3.81 BSC	
LS	0.150 BSC		3.81 BSC	
MHD	0.139	0.149	3.53	3.78
MHO	0.665	0.685	16.89	17.40
TL	0.790	0.800	20.07	20.32
TT	0.040	0.050	1.02	1.27
TW	0.535	0.545	13.59	13.84


NOTES:

1. Dimensions are in inches.
2. Millimeters are given for information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.


SCHEMATICS



1N6660 & 1N6660CCT1
 TERM 1 = ANODE
 TERM 2 = CATHODE
 TERM 3 = ANODE



1N6660R & 1N6660CAT1
 TERM 1 = CATHODE
 TERM 2 = ANODE
 TERM 3 = CATHODE



1N6660DT1
 TERM 1 = ?
 TERM 2 = ?
 TERM 3 = ?

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[1N6660](#) [1N6660R](#) [JAN1N6660DT1](#) [1N6660DT1](#) [1N6660CAT1](#) [1N6660CCT1](#) [JANTXV1N6660](#) [JANTX1N6660](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.