


- **150-mA Low-Dropout Regulator**
- **Output Voltage: 5 V, 3.8 V, 3.3 V, 3.0 V, 2.8 V, 2.7 V, 2.5 V, 1.8 V, 1.6 V and Variable**
- **Dropout Voltage, Typically 300 mV at 150 mA**
- **Thermal Protection**
- **Over Current Limitation**
- **Less Than 2- $\mu$ A Quiescent Current in Shutdown Mode**
- **-40°C to 125°C Operating Junction Temperature Range**
- **5-Pin SOT-23 (DBV) Package**



## description

The TPS763xx family of low-dropout (LDO) voltage regulators offers the benefits of low-dropout voltage, low-power operation, and miniaturized packaging. These regulators feature low dropout voltages and quiescent currents compared to conventional LDO regulators. Offered in a 5-terminal, small outline integrated-circuit SOT-23 package, the TPS763xx series devices are ideal for cost-sensitive designs and for applications where board space is at a premium.

A combination of new circuit design and process innovation has enabled the usual pnp pass transistor to be replaced by a PMOS pass element. Because the PMOS pass element behaves as a low-value resistor, the dropout voltage is very low—typically 300 mV at 150 mA of load current (TPS76333)—and is directly proportional to the load current. Since the PMOS pass element is a voltage-driven device, the quiescent current is very low (140  $\mu$ A maximum) and is stable over the entire range of output load current (0 mA to 150 mA). Intended for use in portable systems such as laptops and cellular phones, the low-dropout voltage feature and low-power operation result in a significant increase in system battery operating life.

The TPS763xx also features a logic-enabled sleep mode to shut down the regulator, reducing quiescent current to 1  $\mu$ A maximum at  $T_J = 25^\circ\text{C}$ . The TPS763xx is offered in 1.6-V, 1.8-V, 2.5-V, 2.7-V, 2.8-V, 3.0-V, 3.3-V, 3.8-V, and 5-V fixed-voltage versions and in a variable version (programmable over the range of 1.5 V to 6.5 V).

### AVAILABLE OPTIONS

| $T_J$          | VOLTAGE  | PACKAGE         | PART NUMBER                 |                             | SYMBOL |
|----------------|----------|-----------------|-----------------------------|-----------------------------|--------|
| -40°C to 125°C | Variable | SOT-23<br>(DBV) | TPS76301DBVT <sup>(1)</sup> | TPS76301DBVR <sup>(2)</sup> | PAZI   |
|                | 1.6 V    |                 | TPS76316DBVT                | TPS76316DBVR                | PBHI   |
|                | 1.8 V    |                 | TPS76318DBVT                | TPS76318DBVR                | PBAI   |
|                | 2.5 V    |                 | TPS76325DBVT                | TPS76325DBVR                | PBBI   |
|                | 2.7 V    |                 | TPS76327DBVT                | TPS76327DBVR                | PBCI   |
|                | 2.8 V    |                 | TPS76328DBVT                | TPS76328DBVR                | PBDI   |
|                | 3.0 V    |                 | TPS76330DBVT                | TPS76330DBVR                | PBII   |
|                | 3.3 V    |                 | TPS76333DBVT                | TPS76333DBVR                | PBEI   |
|                | 3.8 V    |                 | TPS76338DBVT                | TPS76338DBVR                | PBFI   |
|                | 5.0 V    |                 | TPS76350DBVT                | TPS76350DBVR                | PBGI   |

(1) The DBVT passive indicates tape and reel of 250 parts.

(2) The DBVR passive indicates tape and reel of 3000 parts.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

**TPS76301, TPS76316, TPS76318, TPS76325, TPS76327  
TPS76328, TPS76330, TPS76333, TPS76338, TPS76350  
LOW-POWER 150-mA LOW-DROPOUT LINEAR REGULATORS**

SLVS181H – DECEMBER 1998 – REVISED JANUARY 2004

**FUNCTIONAL BLOCK DIAGRAM**

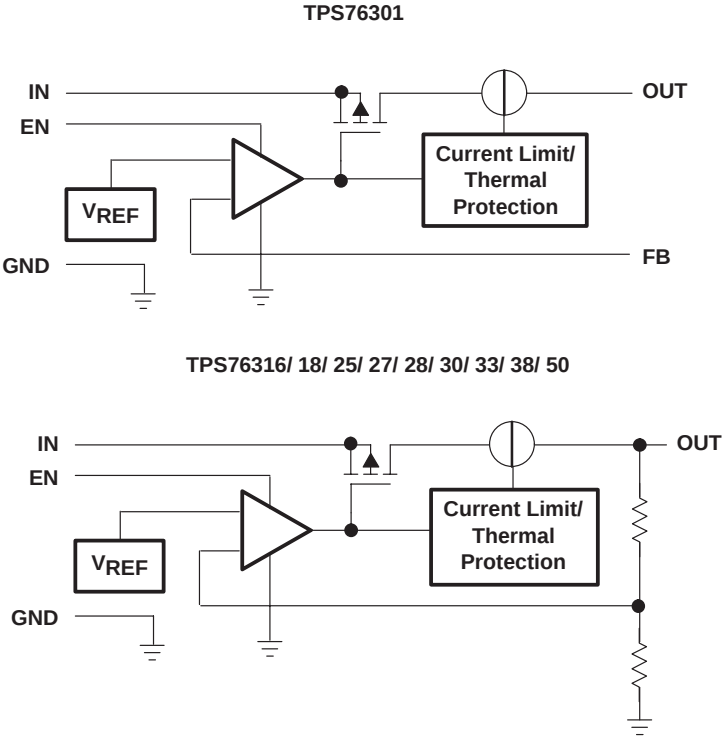

**Terminal Functions**

| TERMINAL<br>NAME | DESCRIPTION                               |
|------------------|-------------------------------------------|
| GND              | Ground                                    |
| EN               | Enable input                              |
| FB               | Feedback voltage (TPS76301 only)          |
| IN               | Input supply voltage                      |
| NC               | No connection (fixed-voltage option only) |
| OUT              | Regulated output voltage                  |

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>1</sup>**

|                                             |                               |
|---------------------------------------------|-------------------------------|
| Input voltage range <sup>(2)</sup>          | –0.3 V to 10 V                |
| Voltage range at EN                         | –0.3 V to $V_I + 0.3$ V       |
| Voltage on OUT, FB                          | 7 V                           |
| Peak output current                         | Internally limited            |
| ESD rating, HBM                             | 2 kV                          |
| Continuous total power dissipation          | See Dissipation Rating Tables |
| Operating junction temperature range, $T_J$ | –40°C to 150°C                |
| Storage temperature range, $T_{stg}$        | –65°C to 150°C                |

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltage values are with respect to network ground terminal.

**DISSIPATION RATING TABLE**

| BOARD                 | PACKAGE | $R_{\theta JC}$ | $R_{\theta JA}$ | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING |
|-----------------------|---------|-----------------|-----------------|---------------------------------------------------|---------------------------------------------|------------------------------------------|------------------------------------------|
| Low K <sup>(1)</sup>  | DBV     | 65.8 °C/W       | 259 °C/W        | 3.9 mW/°C                                         | 386 mW                                      | 212 mW                                   | 154 mW                                   |
| High K <sup>(2)</sup> | DBV     | 65.8 °C/W       | 180 °C/W        | 5.6 mW/°C                                         | 555 mW                                      | 305 mW                                   | 222 mW                                   |

(1) The JEDEC Low K (1s) board design used to derive this data was a 3 inch x 3 inch, two layer board with 2 ounce copper traces on top of the board.

(2) The JEDEC High K (2s2p) board design used to derive this data was a 3 inch x 3 inch, multilayer board with 1 ounce internal power and ground planes and 2 ounce copper traces on top and bottom of the board.

**recommended operating conditions**

|                                       | MIN | NOM | MAX | UNIT |
|---------------------------------------|-----|-----|-----|------|
| Input voltage, $V_I$ <sup>(1)</sup>   | 2.7 |     | 10  | V    |
| Continuous output current, $I_O$      | 0   |     | 150 | mA   |
| Operating junction temperature, $T_J$ | –40 |     | 125 | °C   |

(1) To calculate the minimum input voltage for your maximum output current, use the following equation:

$$V_{I(\min)} = V_{O(\max)} + V_{DO(\max \text{ load})}$$

**TPS76301, TPS76316, TPS76318, TPS76325, TPS76327**  
**TPS76328, TPS76330, TPS76333, TPS76338, TPS76350**  
**LOW-POWER 150-mA LOW-DROPOUT LINEAR REGULATORS**

SLVS181H – DECEMBER 1998 – REVISED JANUARY 2004

**electrical characteristics over recommended operating free-air temperature range,**  
 $V_I = V_{O(\text{typ})} + 1 \text{ V}$ ,  $I_O = 1 \text{ mA}$ ,  $EN = IN$ ,  $C_O = 4.7 \mu\text{F}$  (unless otherwise noted)

| PARAMETER |                |          | TEST CONDITIONS                                                                              |                                                                        | MIN          | TYP   | MAX          | UNIT |
|-----------|----------------|----------|----------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------|-------|--------------|------|
| $V_O$     | Output voltage | TPS76301 | $3.25 \text{ V} > V_I \geq 2.7 \text{ V}$ ,<br>$2.5 \text{ V} \geq V_O \geq 1.5 \text{ V}$ , | $I_O = 1 \text{ mA}$ to $75 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$  | $0.98 V_O$   | $V_O$ | $1.02 V_O$   | V    |
|           |                |          | $3.25 \text{ V} > V_I \geq 2.7 \text{ V}$ ,<br>$2.5 \text{ V} \geq V_O \geq 1.5 \text{ V}$   | $I_O = 1 \text{ mA}$ to $75 \text{ mA}$ ,                              | $0.97 V_O$   | $V_O$ | $1.03 V_O$   |      |
|           |                |          | $V_I \geq 3.25 \text{ V}$ ,<br>$5 \text{ V} \geq V_O \geq 1.5 \text{ V}$                     | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$ | $0.98 V_O$   | $V_O$ | $1.02 V_O$   |      |
|           |                |          | $V_I \geq 3.25 \text{ V}$ ,<br>$5 \text{ V} \geq V_O \geq 1.5 \text{ V}$                     | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$ ,                             | $0.97 V_O$   | $V_O$ | $1.03 V_O$   |      |
|           |                |          | $V_I \geq 3.25 \text{ V}$ ,<br>$5 \text{ V} \geq V_O \geq 1.5 \text{ V}$                     | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$ | $0.975 V_O$  | $V_O$ | $1.025 V_O$  |      |
|           |                |          | $V_I \geq 3.25 \text{ V}$ ,<br>$5 \text{ V} \geq V_O \geq 1.5 \text{ V}$                     | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$ ,                             | $0.9625 V_O$ | $V_O$ | $1.0375 V_O$ |      |
|           |                | TPS76316 | $V_I = 2.7 \text{ V}$ ,                                                                      | $1 \text{ mA} < I_O < 75 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$     | 1.568        | 1.6   | 1.632        | V    |
|           |                |          | $V_I = 2.7 \text{ V}$ ,                                                                      | $1 \text{ mA} < I_O < 75 \text{ mA}$                                   | 1.552        | 1.6   | 1.648        |      |
|           |                |          | $V_I = 3.25 \text{ V}$ ,                                                                     | $1 \text{ mA} < I_O < 100 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$    | 1.568        | 1.6   | 1.632        |      |
|           |                |          | $V_I = 3.25 \text{ V}$ ,                                                                     | $1 \text{ mA} < I_O < 100 \text{ mA}$                                  | 1.552        | 1.6   | 1.648        |      |
|           |                |          | $V_I = 3.25 \text{ V}$ ,                                                                     | $1 \text{ mA} < I_O < 150 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$    | 1.560        | 1.6   | 1.640        |      |
|           |                |          | $V_I = 3.25 \text{ V}$ ,                                                                     | $1 \text{ mA} < I_O < 150 \text{ mA}$                                  | 1.536        | 1.6   | 1.664        |      |
|           |                | TPS76318 | $V_I = 2.7 \text{ V}$ ,                                                                      | $1 \text{ mA} < I_O < 75 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$     | 1.764        | 1.8   | 1.836        | V    |
|           |                |          | $V_I = 2.7 \text{ V}$ ,                                                                      | $1 \text{ mA} < I_O < 75 \text{ mA}$                                   | 1.746        | 1.8   | 1.854        |      |
|           |                |          | $V_I = 3.25 \text{ V}$ ,                                                                     | $1 \text{ mA} < I_O < 100 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$    | 1.764        | 1.8   | 1.836        |      |
|           |                |          | $V_I = 3.25 \text{ V}$ ,                                                                     | $1 \text{ mA} < I_O < 100 \text{ mA}$                                  | 1.746        | 1.8   | 1.854        |      |
|           |                |          | $V_I = 3.25 \text{ V}$ ,                                                                     | $1 \text{ mA} < I_O < 150 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$    | 1.755        | 1.8   | 1.845        |      |
|           |                |          | $V_I = 3.25 \text{ V}$ ,                                                                     | $1 \text{ mA} < I_O < 150 \text{ mA}$                                  | 1.733        | 1.8   | 1.867        |      |
|           |                | TPS76325 | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$                       |                                                                        | 2.45         | 2.5   | 2.55         | V    |
|           |                |          | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$                                                     |                                                                        | 2.425        | 2.5   | 2.575        |      |
|           |                |          | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$                       |                                                                        | 2.438        | 2.5   | 2.562        |      |
|           |                |          | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$                                                     |                                                                        | 2.407        | 2.5   | 2.593        |      |
|           |                | TPS76327 | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$                       |                                                                        | 2.646        | 2.7   | 2.754        | V    |
|           |                |          | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$                                                     |                                                                        | 2.619        | 2.7   | 2.781        |      |
|           |                |          | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$                       |                                                                        | 2.632        | 2.7   | 2.767        |      |
|           |                |          | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$                                                     |                                                                        | 2.599        | 2.7   | 2.801        |      |
|           |                | TPS76328 | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$                       |                                                                        | 2.744        | 2.8   | 2.856        | V    |
|           |                |          | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$                                                     |                                                                        | 2.716        | 2.8   | 2.884        |      |
|           |                |          | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$                       |                                                                        | 2.73         | 2.8   | 2.87         |      |
|           |                |          | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$                                                     |                                                                        | 2.695        | 2.8   | 2.905        |      |
|           |                | TPS76330 | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$                       |                                                                        | 2.94         | 3.0   | 3.06         | V    |
|           |                |          | $I_O = 1 \text{ mA}$ to $100 \text{ mA}$                                                     |                                                                        | 2.91         | 3.0   | 3.09         |      |
|           |                |          | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$ ,<br>$T_J = 25^\circ\text{C}$                       |                                                                        | 2.925        | 3.0   | 3.075        |      |
|           |                |          | $I_O = 1 \text{ mA}$ to $150 \text{ mA}$                                                     |                                                                        | 2.888        | 3.0   | 3.112        |      |

**electrical characteristics over recommended operating free-air temperature range,  
 $V_I = V_{O(\text{typ})} + 1 \text{ V}$ ,  $I_O = 1 \text{ mA}$ ,  $EN = IN$ ,  $C_O = 4.7 \mu\text{F}$  (unless otherwise noted) (continued)**

| PARAMETER        |                                                                                   |                                                                                             | TEST CONDITIONS                                        | MIN   | TYP | MAX   | UNIT |
|------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|--------------------------------------------------------|-------|-----|-------|------|
| V <sub>O</sub>   | Output voltage                                                                    | TPS76333                                                                                    | I <sub>O</sub> = 1 mA to 100 mA, T <sub>J</sub> = 25°C | 3.234 | 3.3 | 3.366 | V    |
|                  |                                                                                   |                                                                                             | I <sub>O</sub> = 1 mA to 100 mA                        | 3.201 | 3.3 | 3.399 |      |
|                  |                                                                                   |                                                                                             | I <sub>O</sub> = 1 mA to 150 mA, T <sub>J</sub> = 25°C | 3.218 | 3.3 | 3.382 |      |
|                  |                                                                                   |                                                                                             | I <sub>O</sub> = 1 mA to 150 mA                        | 3.177 | 3.3 | 3.423 |      |
|                  |                                                                                   | TPS76338                                                                                    | I <sub>O</sub> = 1 mA to 100 mA, T <sub>J</sub> = 25°C | 3.724 | 3.8 | 3.876 | V    |
|                  |                                                                                   |                                                                                             | I <sub>O</sub> = 1 mA to 100 mA                        | 3.705 | 3.8 | 3.895 |      |
|                  |                                                                                   |                                                                                             | I <sub>O</sub> = 1 mA to 150 mA, T <sub>J</sub> = 25°C | 3.686 | 3.8 | 3.914 |      |
|                  |                                                                                   |                                                                                             | I <sub>O</sub> = 1 mA to 150 mA                        | 3.667 | 3.8 | 3.933 |      |
|                  |                                                                                   | TPS76350                                                                                    | I <sub>O</sub> = 1 mA to 100 mA, T <sub>J</sub> = 25°C | 4.875 | 5   | 5.125 | V    |
|                  |                                                                                   |                                                                                             | I <sub>O</sub> = 1 mA to 100 mA                        | 4.825 | 5   | 5.175 |      |
|                  |                                                                                   |                                                                                             | I <sub>O</sub> = 1 mA to 150 mA, T <sub>J</sub> = 25°C | 4.750 | 5   | 5.15  |      |
|                  |                                                                                   |                                                                                             | I <sub>O</sub> = 1 mA to 150 mA                        | 4.80  | 5   | 5.20  |      |
| I <sub>(Q)</sub> | Quiescent current<br>(GND terminal current)                                       | I <sub>O</sub> = 0 to 150 mA, T <sub>J</sub> = 25°C (1)                                     |                                                        | 85    | 100 | µA    |      |
|                  |                                                                                   | I <sub>O</sub> = 0 to 150 mA (2)                                                            |                                                        |       | 140 |       |      |
|                  | Standby current                                                                   | EN < 0.5 V, T <sub>J</sub> = 25°C                                                           |                                                        | 0.5   | 1   |       |      |
|                  |                                                                                   | EN < 0.5 V                                                                                  |                                                        |       | 2   |       |      |
| V <sub>n</sub>   | Output noise voltage                                                              | BW = 300 Hz to 50 kHz, T <sub>J</sub> = 25°C, C <sub>O</sub> = 10 µF (2)                    |                                                        | 140   |     | µV    |      |
| PSRR             | Ripple rejection                                                                  | f = 1 kHz, C <sub>O</sub> = 10 µF, T <sub>J</sub> = 25°C (2)                                |                                                        | 60    |     | dB    |      |
|                  | Current limit                                                                     | T <sub>J</sub> = 25°C (3)                                                                   |                                                        | 0.5   | 0.8 | 1.5   | A    |
|                  | Output voltage line regulation<br>(ΔV <sub>O</sub> /V <sub>O</sub> ) (see Note 3) | V <sub>O</sub> + 1 V < V <sub>I</sub> ≤ 10 V, V <sub>I</sub> ≥ 3.5 V, T <sub>J</sub> = 25°C |                                                        | 0.04  |     | 0.07  | %/V  |
|                  |                                                                                   | V <sub>O</sub> + 1 V < V <sub>I</sub> ≤ 10 V, V <sub>I</sub> ≥ 3.5 V                        |                                                        | 0.1   |     |       |      |
| V <sub>IH</sub>  | EN high level input                                                               | (2)                                                                                         |                                                        | 1.4   |     | 2     | V    |
| V <sub>IL</sub>  | EN low level input                                                                | (2)                                                                                         |                                                        | 0.5   |     | 1.2   |      |
| I <sub>I</sub>   | EN input current                                                                  | EN = 0 V                                                                                    |                                                        | −0.01 |     | −0.5  | µA   |
|                  |                                                                                   | EN = IN                                                                                     |                                                        | −0.01 |     | −0.5  |      |

(1) Minimum  $IN$  operating voltage is  $2.7 \text{ V}$  or  $V_{O(\text{typ})} + 1 \text{ V}$ , whichever is greater.

(2) Test condition includes, output voltage  $V_O = 0 \text{ volts}$  (for variable device  $FB$  is shorted to  $V_O$ ), and pulse duration =  $10 \text{ ms}$ .

(3) If  $V_O < 2.5 \text{ V}$  and  $V_{I\text{max}} = 10 \text{ V}$ ,  $V_{I\text{min}} = 3.5 \text{ V}$ :

$$\text{Line Reg. (mV)} = (\%/V) \times \frac{V_O(V_{I\text{max}} - 3.5 \text{ V})}{100} \times 1000$$

If  $V_O > 2.5 \text{ V}$  and  $V_{I\text{max}} = 10 \text{ V}$ ,  $V_{I\text{min}} = V_O + 1 \text{ V}$ :

$$\text{Line Reg. (mV)} = (\%/V) \times \frac{V_O(V_{I\text{max}} - (V_O + 1))}{100} \times 1000$$

**TPS76301, TPS76316, TPS76318, TPS76325, TPS76327**  
**TPS76328, TPS76330, TPS76333, TPS76338, TPS76350**  
**LOW-POWER 150-mA LOW-DROPOUT LINEAR REGULATORS**

SLVS181H – DECEMBER 1998 – REVISED JANUARY 2004

electrical characteristics over recommended operating free-air temperature range,  
 $V_I = V_{O(\text{typ})} + 1 \text{ V}$ ,  $I_O = 1 \text{ mA}$ ,  $EN = IN$ ,  $C_O = 4.7 \mu\text{F}$  (unless otherwise noted) (continued)

| PARAMETER                |          | TEST CONDITIONS                                   | MIN | TYP | MAX | UNIT |
|--------------------------|----------|---------------------------------------------------|-----|-----|-----|------|
| $V_{DO}$ Dropout voltage | TPS76325 | $I_O = 0 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |     | 0.2 |     | mV   |
|                          |          | $I_O = 1 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |     | 3   |     |      |
|                          |          | $I_O = 50 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |     | 120 | 150 |      |
|                          |          | $I_O = 50 \text{ mA}$                             |     |     | 200 |      |
|                          |          | $I_O = 75 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |     | 180 | 225 |      |
|                          |          | $I_O = 75 \text{ mA}$                             |     |     | 300 |      |
|                          |          | $I_O = 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |     | 240 | 300 |      |
|                          |          | $I_O = 100 \text{ mA}$                            |     |     | 400 |      |
|                          |          | $I_O = 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |     | 360 | 450 |      |
|                          |          | $I_O = 150 \text{ mA}$                            |     |     | 600 |      |
|                          | TPS76333 | $I_O = 0 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |     | 0.2 |     | mV   |
|                          |          | $I_O = 1 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |     | 3   |     |      |
|                          |          | $I_O = 50 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |     | 100 | 125 |      |
|                          |          | $I_O = 50 \text{ mA}$                             |     |     | 166 |      |
|                          |          | $I_O = 75 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |     | 150 | 188 |      |
|                          |          | $I_O = 75 \text{ mA}$                             |     |     | 250 |      |
|                          |          | $I_O = 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |     | 200 | 250 |      |
|                          |          | $I_O = 100 \text{ mA}$                            |     |     | 333 |      |
|                          |          | $I_O = 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |     | 300 | 375 |      |
|                          |          | $I_O = 150 \text{ mA}$                            |     |     | 500 |      |
|                          | TPS76350 | $I_O = 0 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |     | 0.2 |     | mV   |
|                          |          | $I_O = 1 \text{ mA}$ , $T_J = 25^\circ\text{C}$   |     | 2   |     |      |
|                          |          | $I_O = 50 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |     | 60  | 75  |      |
|                          |          | $I_O = 50 \text{ mA}$                             |     |     | 100 |      |
|                          |          | $I_O = 75 \text{ mA}$ , $T_J = 25^\circ\text{C}$  |     | 90  | 113 |      |
|                          |          | $I_O = 75 \text{ mA}$                             |     |     | 150 |      |
|                          |          | $I_O = 100 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |     | 120 | 150 |      |
|                          |          | $I_O = 100 \text{ mA}$                            |     |     | 200 |      |
|                          |          | $I_O = 150 \text{ mA}$ , $T_J = 25^\circ\text{C}$ |     | 180 | 225 |      |
|                          |          | $I_O = 150 \text{ mA}$                            |     |     | 300 |      |

# TYPICAL CHARACTERISTICS

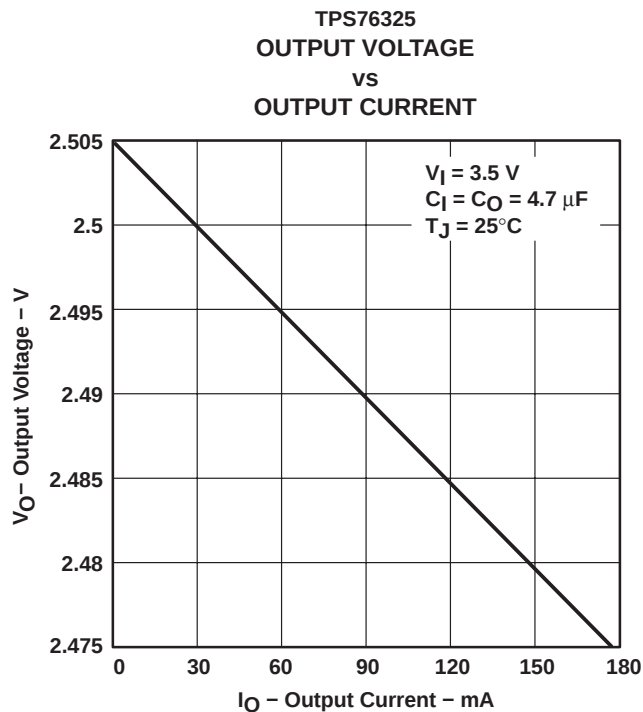


Figure 1

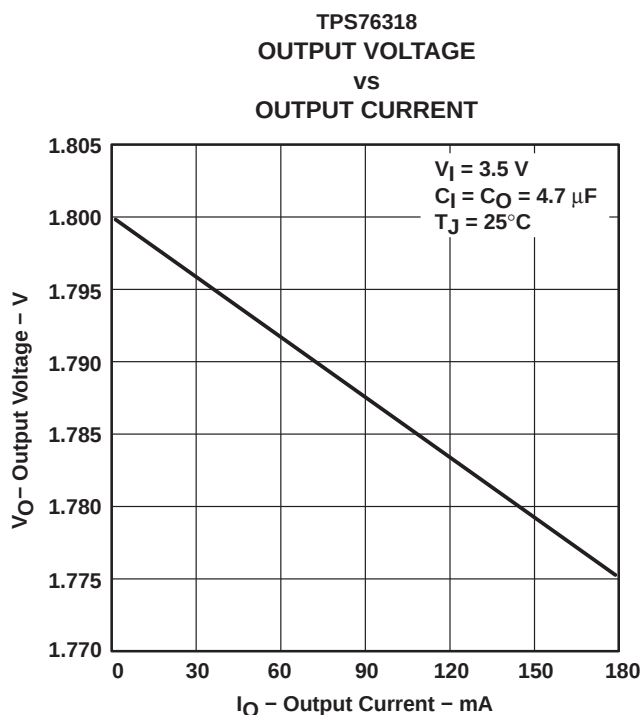


Figure 2

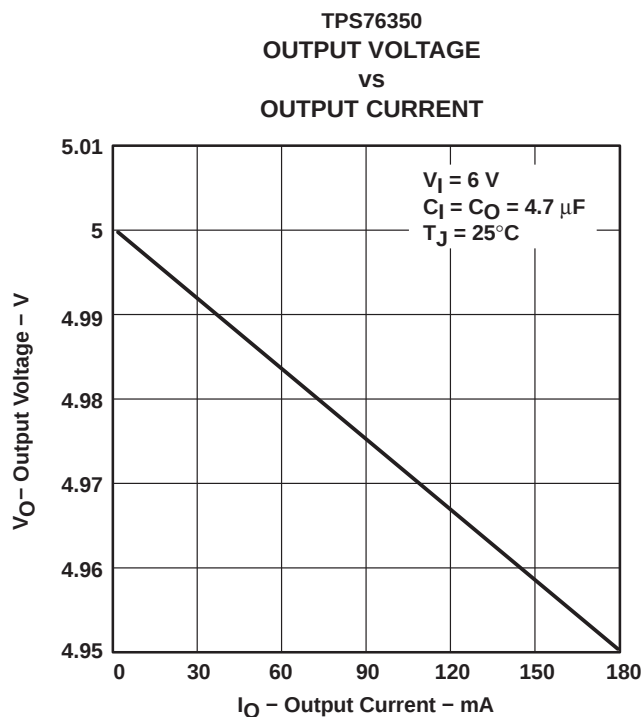


Figure 3

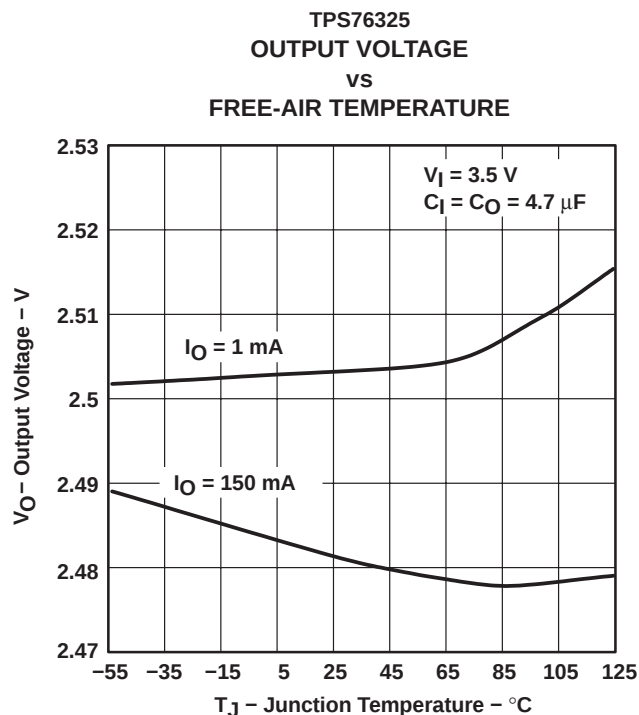


Figure 4

## TYPICAL CHARACTERISTICS

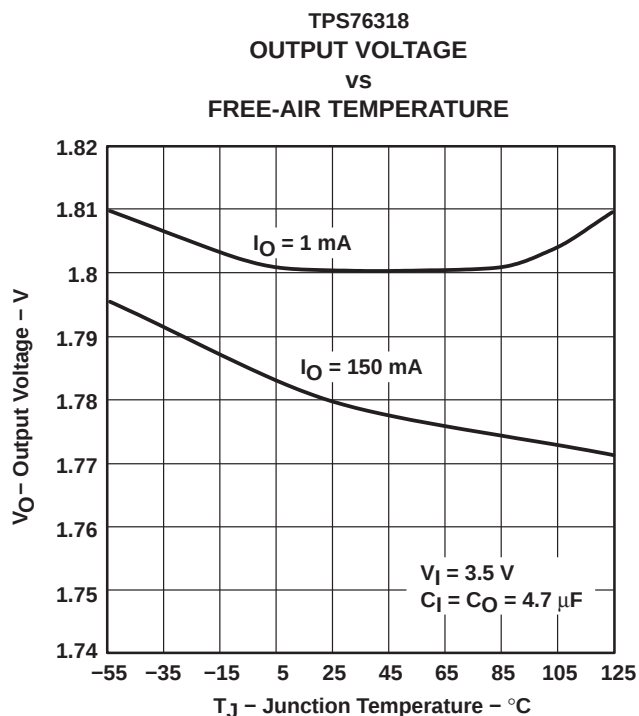


Figure 5

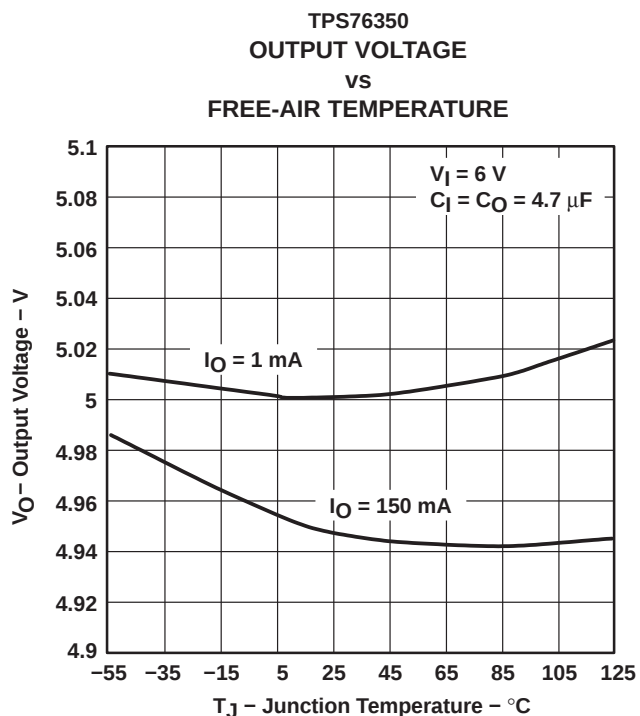


Figure 6

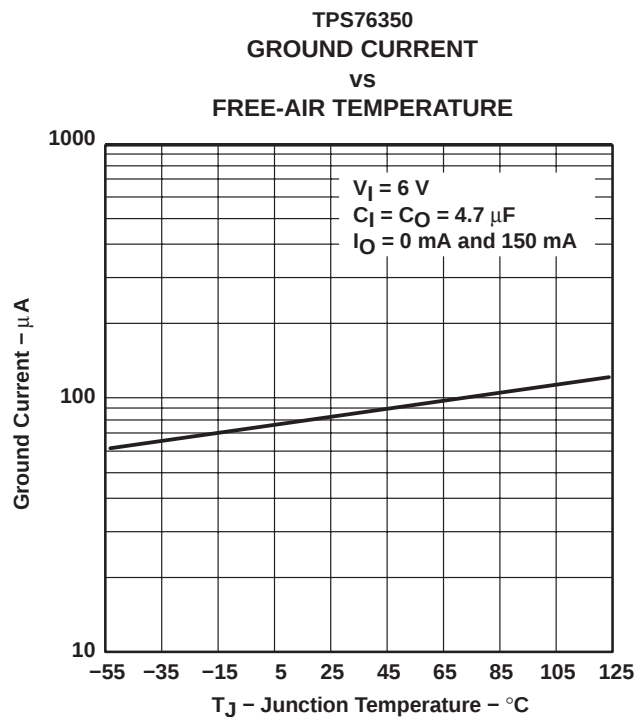


Figure 7

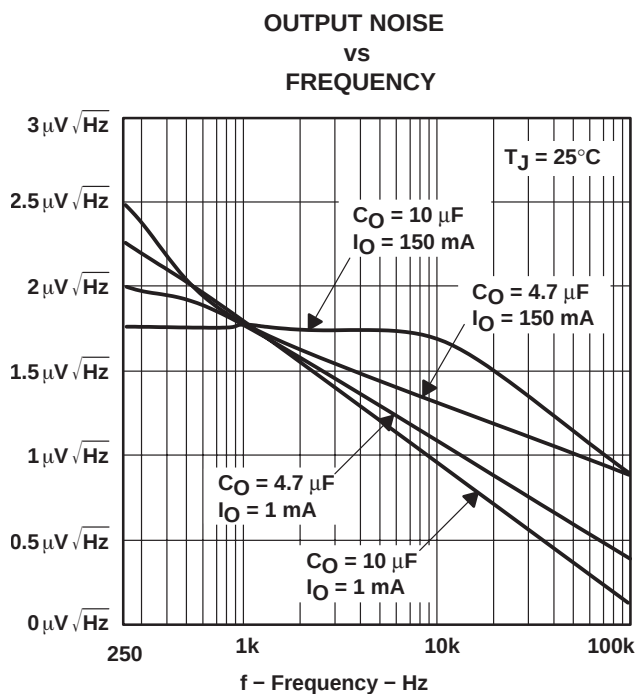


Figure 8

## TYPICAL CHARACTERISTICS

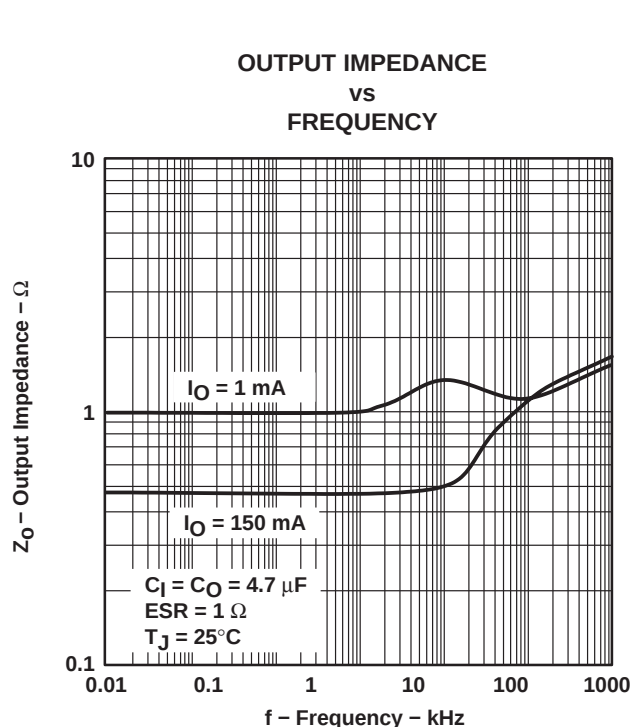


Figure 9

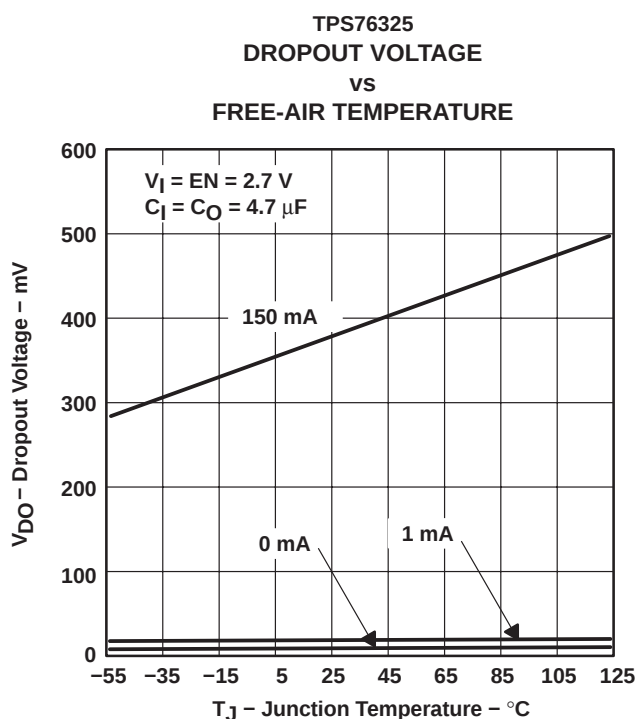


Figure 10

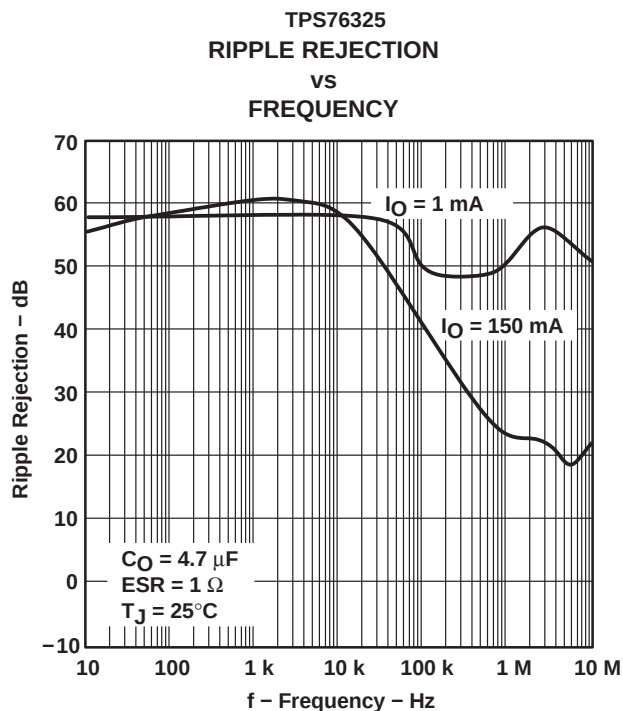


Figure 11

## TYPICAL CHARACTERISTICS

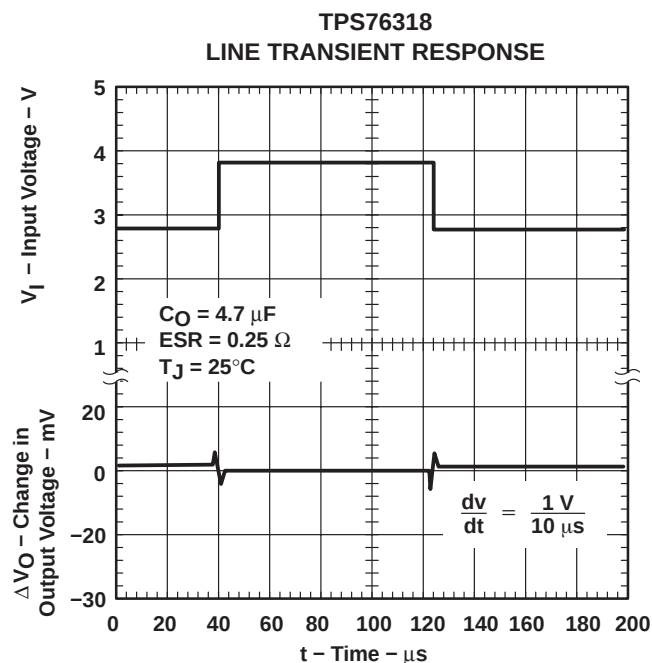


Figure 12

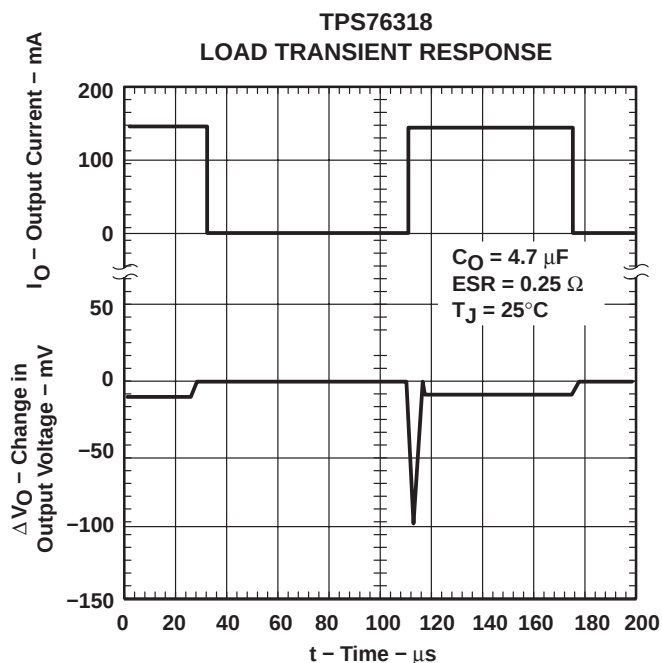


Figure 13

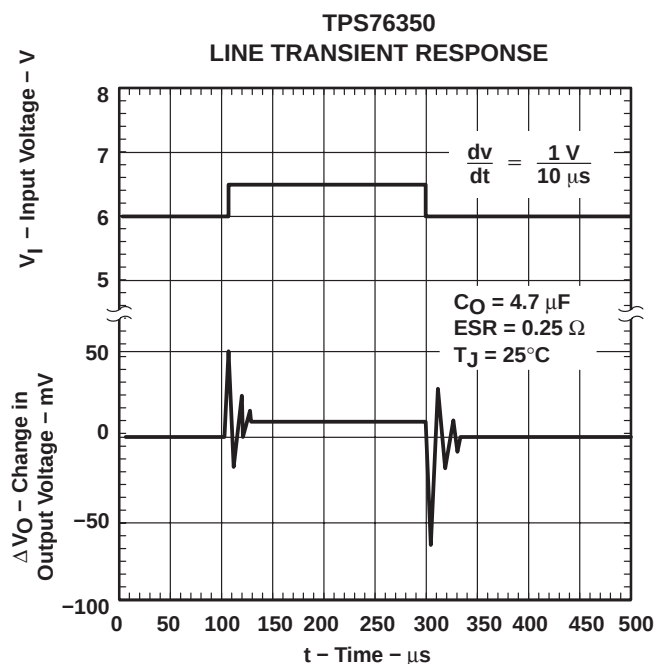


Figure 14

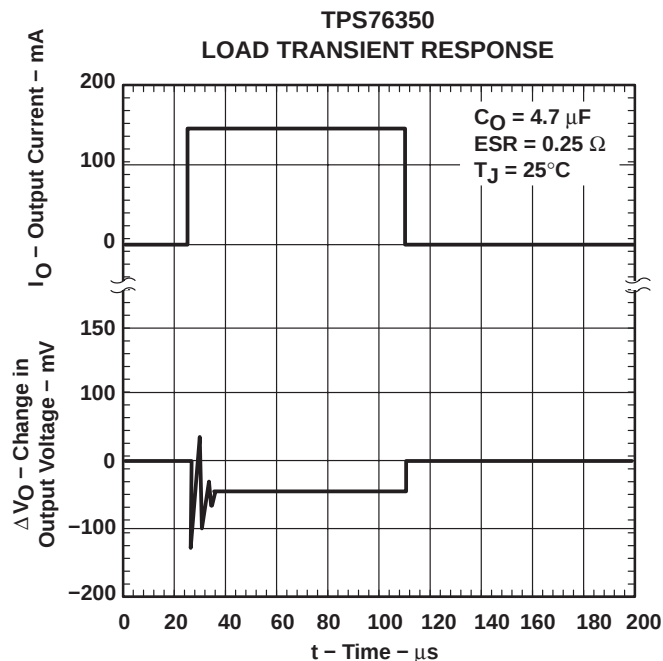


Figure 15

## TYPICAL CHARACTERISTICS

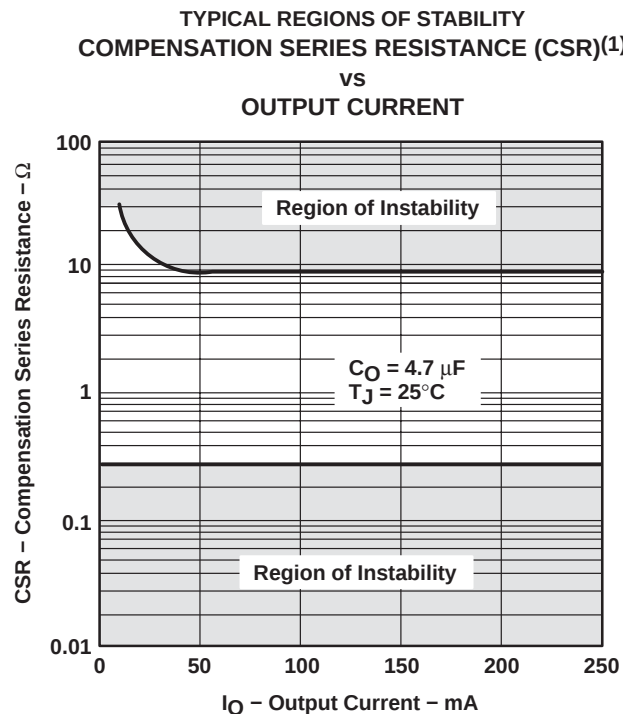


Figure 16

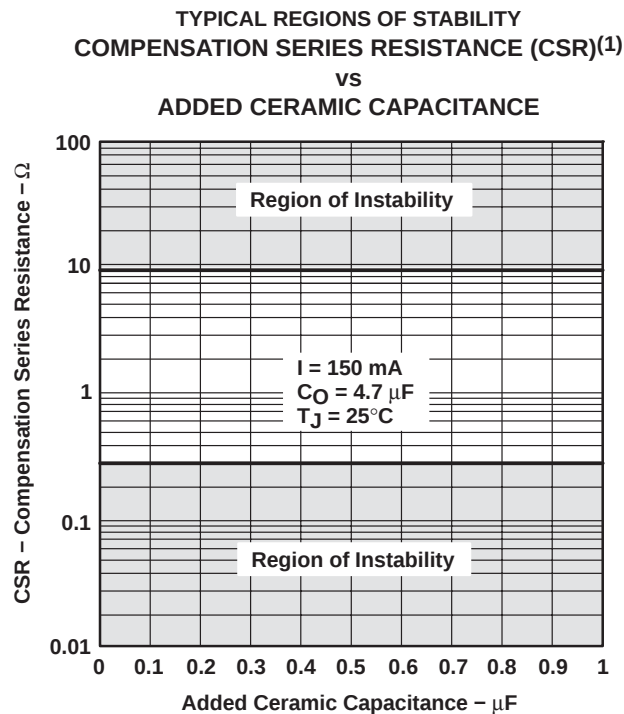


Figure 17

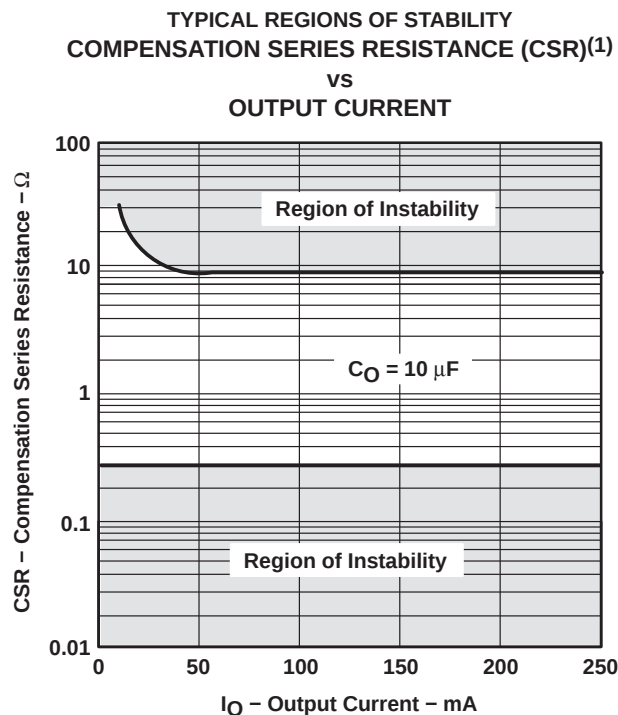


Figure 18

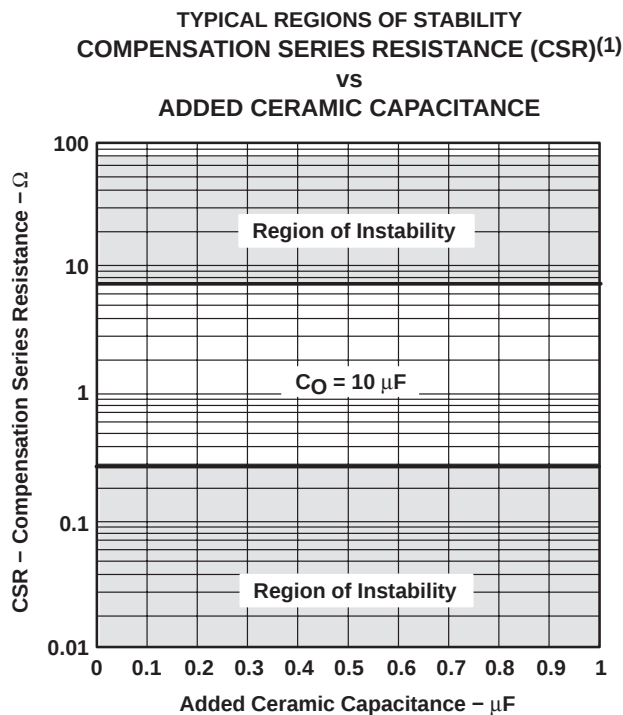


Figure 19

<sup>(1)</sup> CSR refers to the total series resistance, including the ESR of the capacitor, any series resistance added externally, and PWB trace resistance to  $C_O$ .

## APPLICATION INFORMATION

The TPS763xx low-dropout (LDO) regulators are new families of regulators which have been optimized for use in battery-operated equipment and feature extremely low dropout voltages, low quiescent current (140  $\mu$ A), and an enable input to reduce supply currents to less than 2  $\mu$ A when the regulator is turned off.


### device operation

The TPS763xx uses a PMOS pass element to dramatically reduce both dropout voltage and supply current over more conventional PNP pass element LDO designs. The PMOS pass element is a voltage-controlled device that, unlike a PNP transistor, does not require increased drive current as output current increases. Supply current in the TPS763xx is essentially constant from no-load to maximum load.

Current limiting and thermal protection prevent damage by excessive output current and/or power dissipation. The device switches into a constant-current mode at approximately 1 A; further load reduces the output voltage instead of increasing the output current. The thermal protection shuts the regulator off if the junction temperature rises above 165°C. Recovery is automatic when the junction temperature drops approximately 25°C below the high temperature trip point. The PMOS pass element includes a back diode that safely conducts reverse current when the input voltage level drops below the output voltage level.

A logic low on the enable input, EN shuts off the output and reduces the supply current to less than 2  $\mu$ A. EN should be tied high in applications where the shutdown feature is not used.

A typical application circuit is shown in Figure 20.

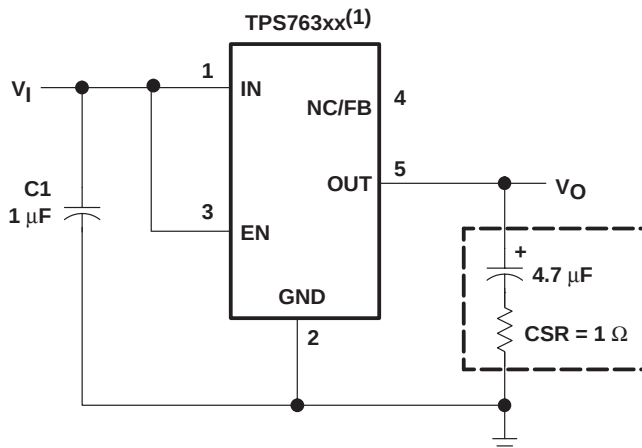

(1) TPS76316, TPS76318, TPS76325, TPS76327, TPS76328, TPS76330, TPS76333, TPS76338, TPS76350 (fixed-voltage options).

**Figure 20. Typical Application Circuit**

## APPLICATION INFORMATION

### external capacitor requirements

Although not required, a 0.047  $\mu\text{F}$  or larger ceramic bypass input capacitor, connected between IN and GND and located close to the TPS763xx, is recommended to improve transient response and noise rejection. A higher-value electrolytic input capacitor may be necessary if large, fast-rise-time load transients are anticipated and the device is located several inches from the power source.

Like all low dropout regulators, the TPS763xx requires an output capacitor connected between OUT and GND to stabilize the internal loop control. The minimum recommended capacitance value is 4.7  $\mu\text{F}$  and the ESR (equivalent series resistance) must be between 0.3  $\Omega$  and 10  $\Omega$ . Capacitor values 4.7  $\mu\text{F}$  or larger are acceptable, provided the ESR is less than 10  $\Omega$ . Solid tantalum electrolytic, aluminum electrolytic, and multilayer ceramic capacitors are all suitable, provided they meet the requirements described above. Most of the commercially available 4.7  $\mu\text{F}$  surface-mount solid tantalum capacitors, including devices from Sprague, Kemet, and Nichicon, meet the ESR requirements stated above.

#### CAPACITOR SELECTION

| PART NO.         | MFR.    | VALUE             | MAX ESR <sup>(1)</sup> | SIZE (H $\times$ L $\times$ W) <sup>†</sup> |
|------------------|---------|-------------------|------------------------|---------------------------------------------|
| T494B475K016AS   | KEMET   | 4.7 $\mu\text{F}$ | 1.5 $\Omega$           | 1.9 $\times$ 3.5 $\times$ 2.8               |
| 195D106x0016x2T  | SPRAGUE | 10 $\mu\text{F}$  | 1.5 $\Omega$           | 1.3 $\times$ 7.0 $\times$ 2.7               |
| 695D106x003562T  | SPRAGUE | 10 $\mu\text{F}$  | 1.3 $\Omega$           | 2.5 $\times$ 7.6 $\times$ 2.5               |
| TPSC475K035R0600 | AVX     | 4.7 $\mu\text{F}$ | 0.6 $\Omega$           | 2.6 $\times$ 6.0 $\times$ 3.2               |

(1) Size is in mm. ESR is maximum resistance in ohms at 100 kHz and  $T_A = 25^\circ\text{C}$ . Listings are sorted by height.

### output voltage programming

The output voltage of the TPS76301 adjustable regulator is programmed using an external resistor divider as shown in Figure 21. The output voltage is calculated using:

$$V_O = 0.995 \times V_{\text{ref}} \times \left(1 + \frac{R1}{R2}\right) \quad (1)$$

Where:

$V_{\text{ref}} = 1.192 \text{ V}$  typ (the internal reference voltage)

0.995 is a constant used to center the load regulator (1%)


Resistors R1 and R2 should be chosen for approximately 7- $\mu\text{A}$  divider current. Lower value resistors can be used but offer no inherent advantage and waste more power. Higher values should be avoided as leakage currents at FB increase the output voltage error. The recommended design procedure is to choose  $R2 = 169 \text{ k}\Omega$  to set the divider current at 7  $\mu\text{A}$  and then calculate R1 using:

$$R1 = \left( \frac{V_O}{0.995 \times V_{\text{ref}}} - 1 \right) \times R2 \quad (2)$$

## APPLICATION INFORMATION

| OUTPUT VOLTAGE<br>PROGRAMMING GUIDE |                               |     |
|-------------------------------------|-------------------------------|-----|
| OUTPUT<br>VOLTAGE<br>(V)            | DIVIDER RESISTANCE<br>(kΩ)(1) |     |
|                                     | R1                            | R2  |
| 2.5                                 | 187                           | 169 |
| 3.3                                 | 301                           | 169 |
| 3.6                                 | 348                           | 169 |
| 4                                   | 402                           | 169 |
| 5                                   | 549                           | 169 |
| 6.45                                | 750                           | 169 |

(1) 1% values shown.

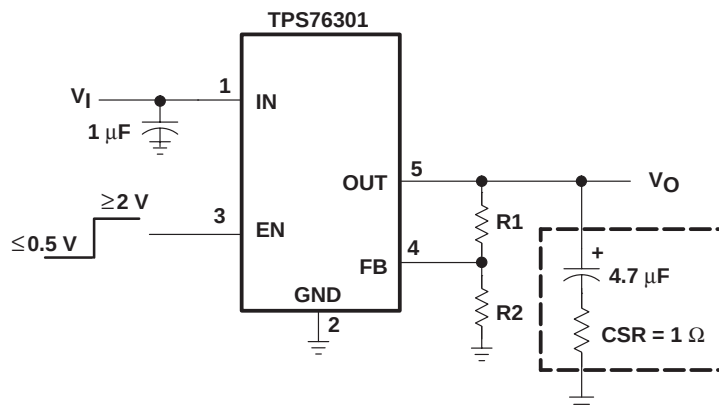

**Figure 21. TPS76301 Adjustable LDO Regulator Programming**

### power dissipation and junction temperature

Specified regulator operation is assured to a junction temperature of 125°C; the maximum junction temperature allowable to avoid damaging the device is 150°C. This restriction limits the power dissipation the regulator can handle in any given application. To ensure the junction temperature is within acceptable limits, calculate the maximum allowable dissipation,  $P_{D(max)}$ , and the actual dissipation,  $P_D$ , which must be less than or equal to  $P_{D(max)}$ .

The maximum-power-dissipation limit is determined using the following equation:

$$P_{D(max)} = \frac{T_{Jmax} - T_A}{R_{\theta JA}}$$

Where:

$T_{Jmax}$  is the maximum allowable junction temperature

$R_{\theta JA}$  is the thermal resistance junction-to-ambient for the package, see the dissipation rating table.

$T_A$  is the ambient temperature.

The regulator dissipation is calculated using:

$$P_D = (V_I - V_O) \times I_O$$

Power dissipation resulting from quiescent current is negligible.

## APPLICATION INFORMATION

### regulator protection

The TPS763xx pass element has a built-in back diode that safely conducts reverse currents when the input voltage drops below the output voltage (e.g., during power down). Current is conducted from the output to the input and is not internally limited. If extended reverse voltage is anticipated, external limiting might be appropriate.

The TPS763xx also features internal current limiting and thermal protection. During normal operation, the TPS763xx limits output current to approximately 800 mA. When current limiting engages, the output voltage scales back linearly until the overcurrent condition ends. While current limiting is designed to prevent gross device failure, care should be taken not to exceed the power dissipation ratings of the package. If the temperature of the device exceeds 165°C, thermal-protection circuitry shuts it down. Once the device has cooled down to below 140°C, regulator operation resumes.

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TPS76301DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76301DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76301DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76301DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76316DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76316DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76316DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76316DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76318DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76318DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76318DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76318DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76325DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76325DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76325DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76325DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76327DBV      | OBSOLETE              | SOT-23       | DBV             | 5    |             | TBD                     | Call TI          | Call TI                      |
| TPS76327DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76327DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76327DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76327DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76328DBV      | OBSOLETE              | SOT-23       | DBV             | 5    |             | TBD                     | Call TI          | Call TI                      |
| TPS76328DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76328DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76328DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76328DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| no Sb/Br)        |                       |              |                 |      |             |                         |                  |                              |
| TPS76330DBV      | OBSOLETE              | SOT-23       | DBV             | 5    |             | TBD                     | Call TI          | Call TI                      |
| TPS76330DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76330DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76330DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76330DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76333DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76333DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76333DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76333DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76338DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76338DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76338DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76338DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76350DBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76350DBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76350DBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TPS76350DBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## DBV (R-PDSO-G5)

## PLASTIC SMALL-OUTLINE PACKAGE

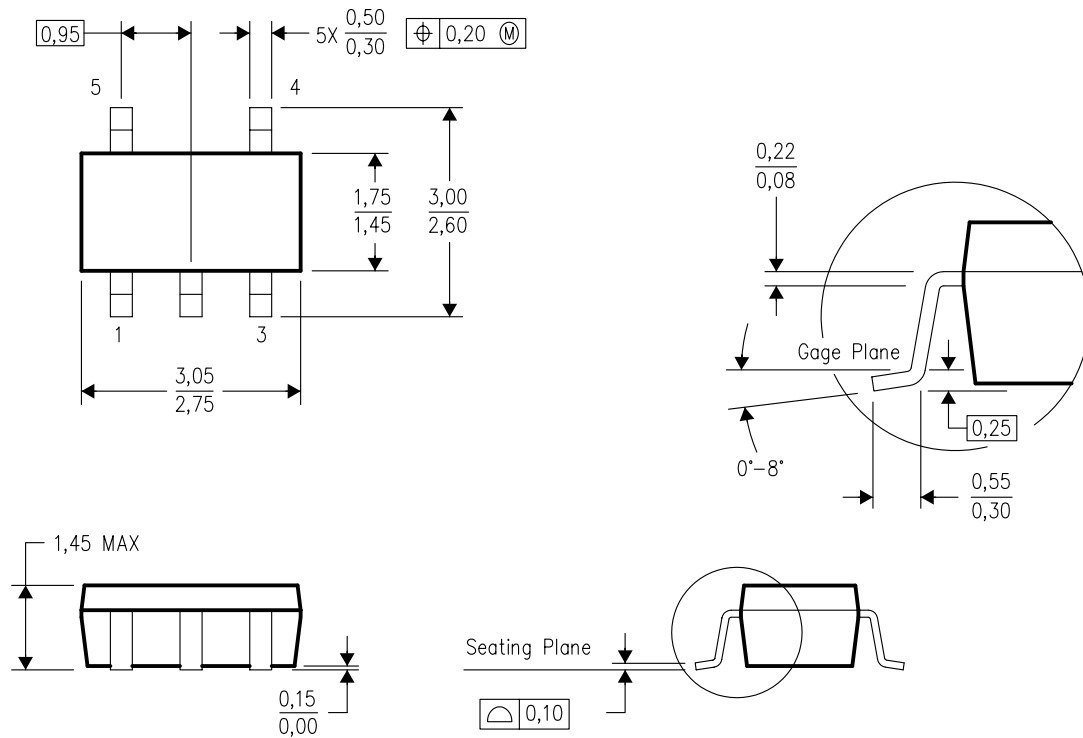

4073253-4/J 10/2005

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - D. Falls within JEDEC MO-178 Variation AA.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>  |                                                                    | <b>Applications</b> |                                                                          |
|------------------|--------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |                                                                    | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |                                                                    | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |                                                                    | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.