



## Features

- Lead free as standard
- RoHS compliant\*
- Leadless
- High speed

## Applications

- Cellular phones
- PDAs
- Desktop PCs and notebooks
- Digital cameras
- MP3 players

# Switching Chip Diode Series - 0603 / 1005

## General Information

The markets of portable communications, computing and video equipment are challenging the semiconductor industry to develop increasingly smaller electronic components.

Bourns offers small-signal high-speed Switching Diodes for switching digital signal applications, in compact chip package 0603 and 1005 size format, which offer PCB real estate savings and are considerably smaller than competitive parts. The Switching Diodes offer a forward current of 100 mA or 150 mA, a reverse voltage of 80 V or 75 V and also have a low leakage reverse current option. The diodes are lead-free with Cu/Ni/Au plated terminations and are compatible with lead-free manufacturing processes, conforming to many industry and government regulations on lead-free components.

Bourns® Chip Diodes conform to JEDEC standards, easy to handle on standard pick and place equipment and their flat configuration makes roll away much more difficult.

## Electrical Characteristics (@ T<sub>A</sub> = 25 °C Unless Otherwise Noted)

| Parameter                            | Symbol          | CDxxxx-S0180  | CDxxxx-S01575                    | CDxxxx-S0180R                     | Unit |
|--------------------------------------|-----------------|---|----------------------------------|-----------------------------------|------|
| Forward Voltage (Max.)               | V <sub>F</sub>  | 1.00<br>(I <sub>f</sub> = 100 mA)   | 1.00<br>(I <sub>f</sub> = 50 mA) | 1.00<br>(I <sub>f</sub> = 100 mA) | V    |
| Capacitance Between Terminals (Max.) | C <sub>T</sub>  | 4<br>(f = 100 MHz, V <sub>r</sub> = 1 V DC)                               |                                  |                                   | pF   |
| Reverse Recovery Time (Max.)         | t <sub>rr</sub> | 4<br>(V <sub>r</sub> = 6V, I <sub>f</sub> = 10 mA, R <sub>L</sub> = 50 Ω) |                                  |                                   | nS   |
| Reverse Current (Max.)               | I <sub>R</sub>  | 0.1<br>(V <sub>r</sub> = 80 V)  | 2.5<br>(V <sub>r</sub> = 75 V)   | 0.05<br>(V <sub>r</sub> = 75 V)   | μA   |

## Absolute Ratings (@ T<sub>A</sub> = 25 °C Unless Otherwise Noted)

| Parameter                       | Symbol             | CDxxxx-S0180 | CDxxxx-S01575 | CDxxxx-S0180R | Unit |
|---------------------------------|--------------------|--------------|---------------|---------------|------|
| Repetitive Peak Reverse Voltage | V <sub>RRM</sub>   | 90           | 100           | 90            | V    |
| Reverse Voltage                 | V <sub>R</sub>     | 80           | 75            | 80            | V    |
| Average Forward Current         | I <sub>o</sub>     | 100          | 150           | 100           | mA   |
| Forward Current, Surge Peak     | I <sub>surge</sub> | 1*           | 4**           | 1*            | A    |
| Power Dissipation - CD0603      | PD                 | 150          | 150           | 150           | mW   |
| Power Dissipation - CD1005      |                    | 300          | 300           | 300           |      |
| Storage Temperature             | T <sub>STG</sub>   | -40 to +125  |               |               | °C   |
| Junction Temperature            | T <sub>J</sub>     | -40 to +125  |               |               | °C   |

\* Condition: 8.3 ms single half sine-wave superimposed on rate load (JEDEC method).

\*\* Condition: 1.0 μs single half sine-wave superimposed on rate load (JEDEC method).


## How To Order

|  |                            |
|--|----------------------------|
|  | <b>CD 0603 - S 01 80 R</b> |
| Common Code _____                                    |                            |
| Chip Diode   |                            |
| Package _____  |                            |
| • 0603   |                            |
| • 1005   |                            |
| Model _____  |                            |
| S = High Speed Switching                             |                            |
| Average Forward Current (I <sub>o</sub> ) Code _____ |                            |
| 01 = 100 mA  |                            |
| 015 = 150 mA   |                            |
| (Code x 1000 mA = Average Forward Current)           |                            |
| Reverse Voltage (V <sub>R</sub> ) Code _____         |                            |
| 80 = 80 V  |                            |
| 75 = 75 V  |                            |
| Reverse Current Suffix _____                         |                            |
| R = Low Leakage I <sub>R</sub> (CDxxxx-S0180R)       |                            |


# Switching Chip Diode Series - 0603 / 1005

**BOURNS®**

## Product Dimensions

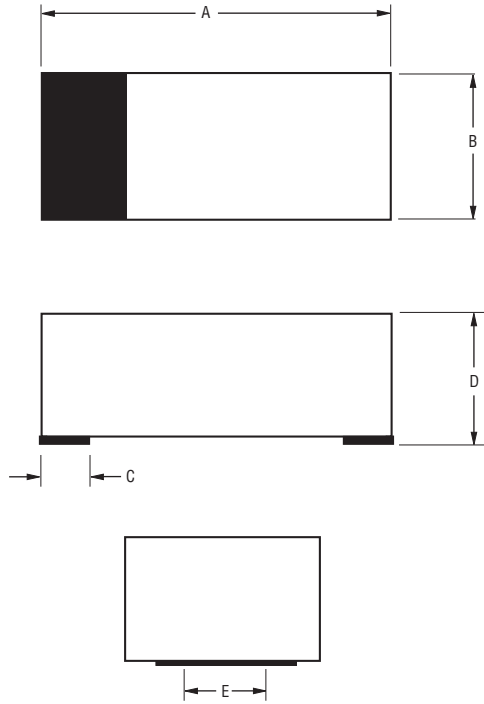

## Recommended Pad Layout

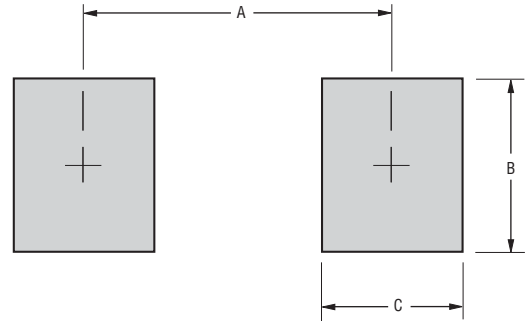

| Dimension | 0603                   | 1005                   |
|-----------|------------------------|------------------------|
| A (Max.)  | $\frac{1.25}{(0.049)}$ | $\frac{2.00}{(0.079)}$ |
| B (Min.)  | $\frac{1.00}{(0.039)}$ | $\frac{1.3}{(0.051)}$  |
| C (Min.)  | $\frac{0.6}{(0.024)}$  | $\frac{0.7}{(0.028)}$  |

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

| Dimension | 0603                                  | 1005                                  |
|-----------|---------------------------------------|---------------------------------------|
| A         | $\frac{1.60 - 1.80}{(0.063 - 0.071)}$ | $\frac{2.40 - 2.60}{(0.095 - 0.102)}$ |
| B         | $\frac{0.80 - 1.00}{(0.031 - 0.039)}$ | $\frac{1.10 - 1.30}{(0.043 - 0.051)}$ |
| C         | $\frac{0.45}{(0.018)}$ Typ.           | $\frac{0.50}{(0.020)}$ Typ.           |
| D         | $\frac{0.70 - 0.85}{(0.027 - 0.033)}$ | $\frac{0.70 - 0.90}{(0.027 - 0.035)}$ |
| E         | $\frac{0.70}{(0.028)}$ Typ.           | $\frac{1.00}{(0.039)}$ Typ.           |

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

## Physical Specifications

Case .....0603(1608) / 1005(2512) Molded plastic  
 Terminals .....Solder plated, solderable per MIL-STD-750,  
 Method 2026  
 Polarity .....Indicated by cathode band  
 Mounting Position .....Any

## Typical Part Marking


CDxxxx-S0180 .....S1  
 CDxxxx-S01575 .....S3  
 CDxxxx-S0180R .....S2

# Switching Chip Diode Series - 0603 / 1005


**BOURNS®**

## Rating and Characteristic Curves: CDxxxx-S0180


### Forward Characteristics

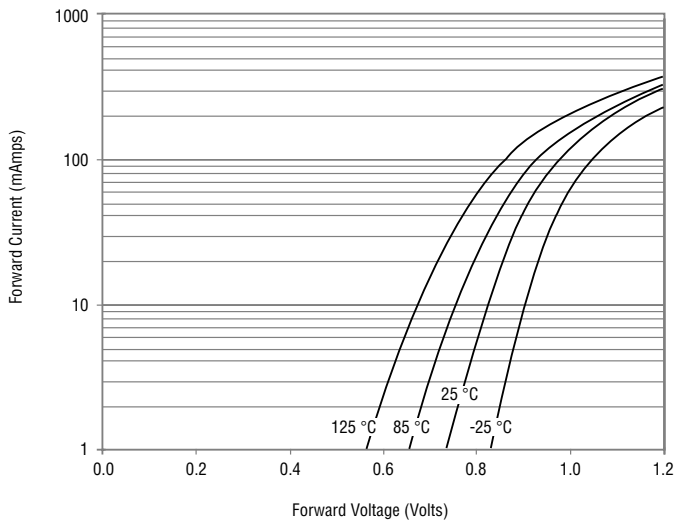


### Reverse Characteristics

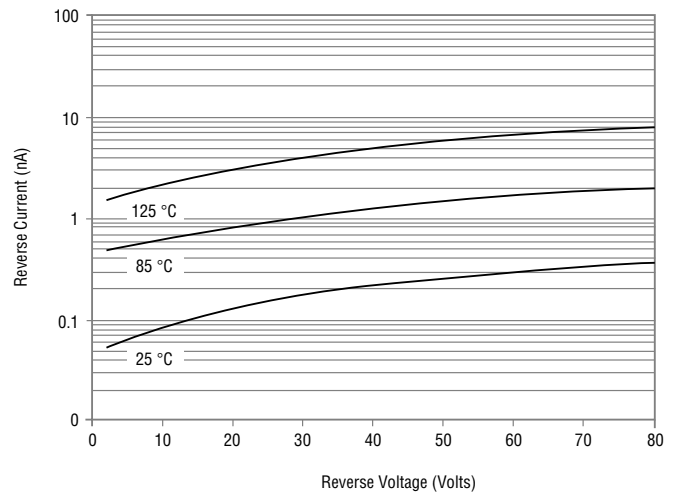

### Derating Curve

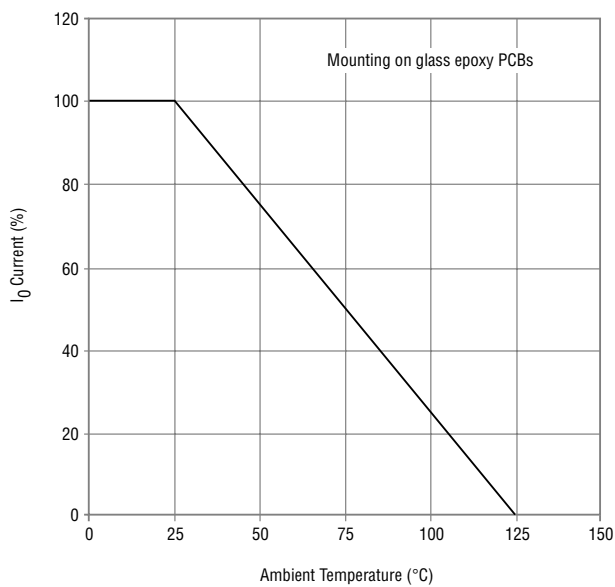

### Capacitance Between Terminals

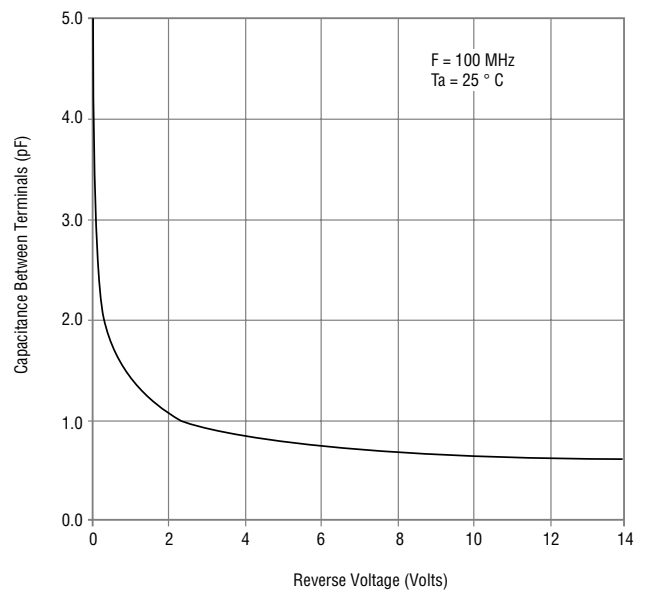


# Switching Chip Diode Series - 0603 / 1005


**BOURNS®**

## Rating and Characteristic Curves: CDxxx-S01575


### Forward Characteristics

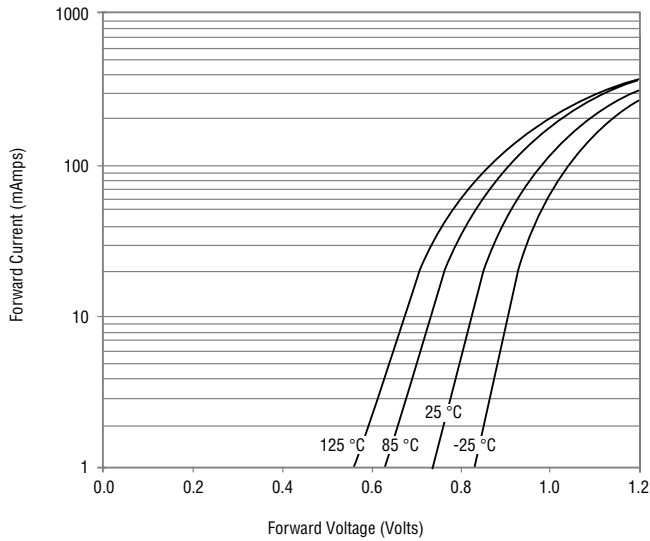


### Reverse Characteristics

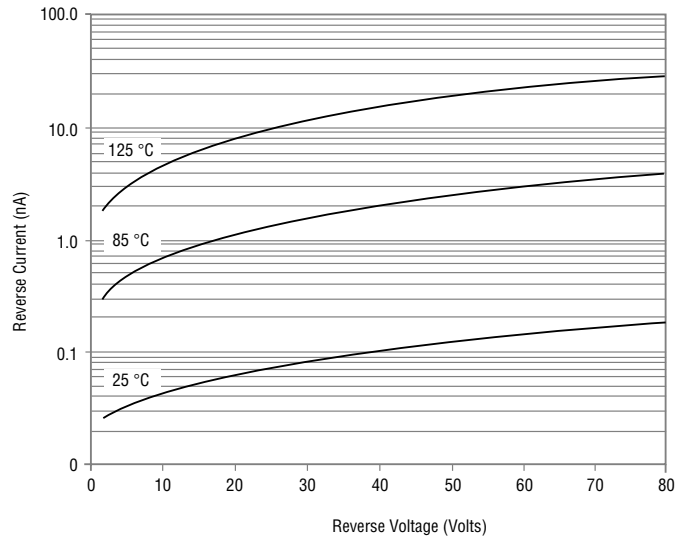

### Derating Curve

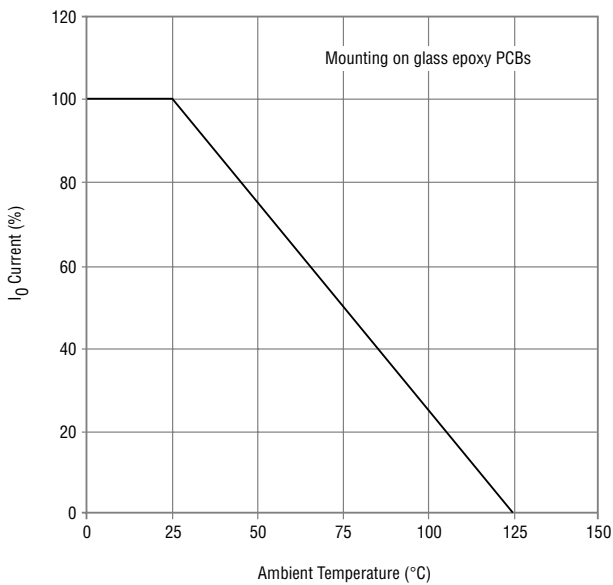

### Capacitance Between Terminals

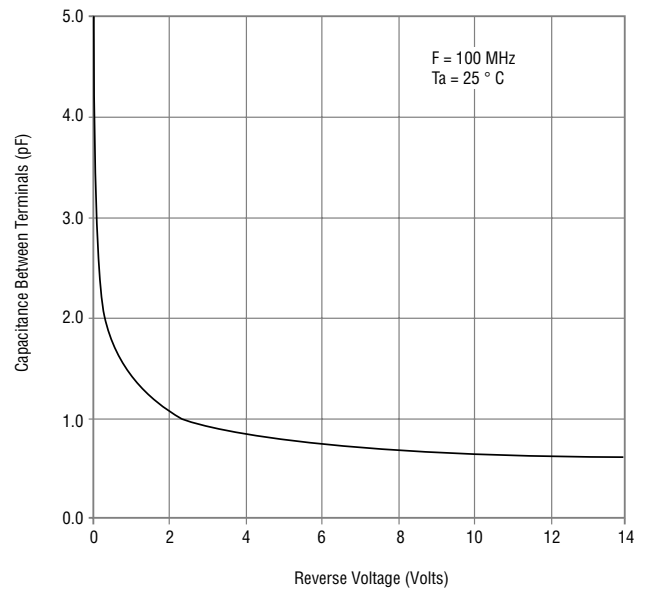


# Switching Chip Diode Series - 0603 / 1005


**BOURNS®**

## Rating and Characteristic Curves: CDxxx-S0180R


### Forward Characteristics

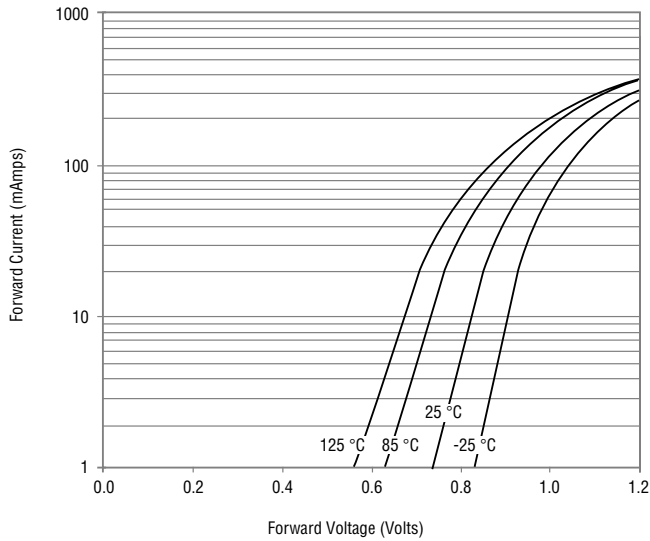


### Reverse Characteristics

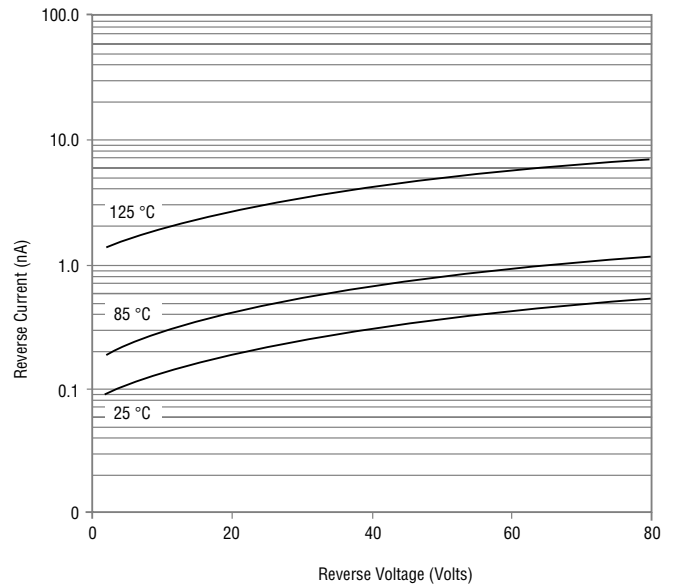

### Derating Curve

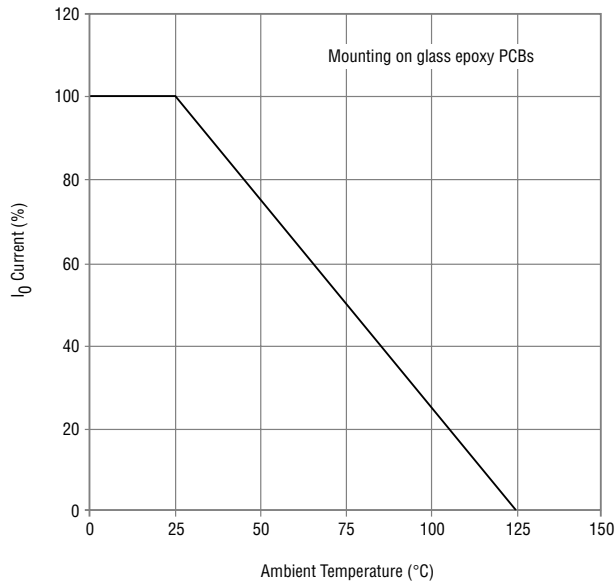

### Capacitance Between Terminals

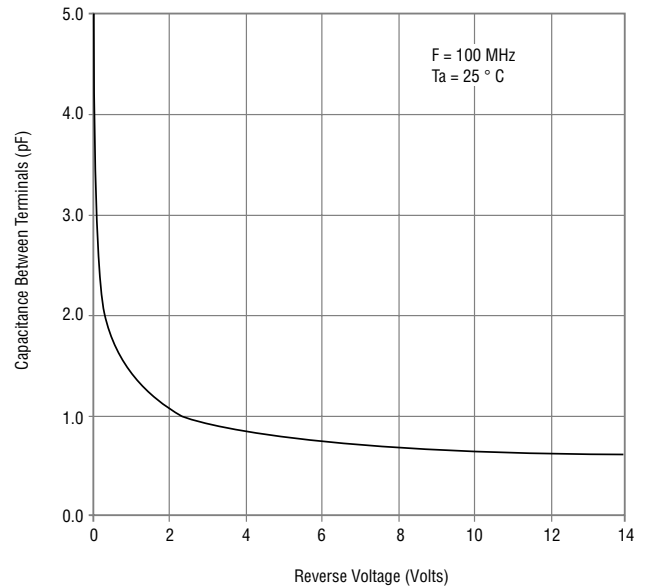


# Switching Chip Diode Series - 0603 / 1005

**BOURNS®**

## Packaging Information

The product will be dispensed in Tape and Reel format (see diagram below).

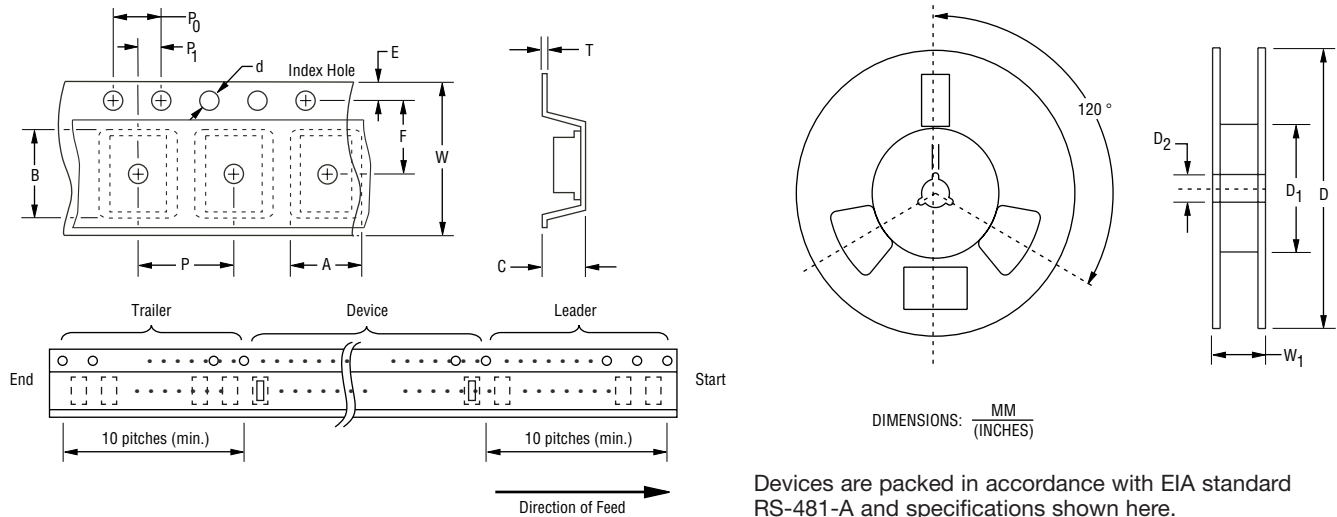

| Item                   | Symbol         | 0603                                    | 1005                                    |
|------------------------|----------------|---|---|
| Carrier Width          | A              | $\frac{1.00 \pm 0.10}{(0.039 - 0.004)}$ | $\frac{1.55 \pm 0.10}{(0.061 - 0.004)}$ |
| Carrier Length         | B              | $\frac{1.85 \pm 0.10}{(0.073 - 0.004)}$ | $\frac{2.65 \pm 0.10}{(0.104 - 0.004)}$ |
| Carrier Depth          | C              | $\frac{1.00 \pm 0.10}{(0.039 - 0.004)}$ | $\frac{1.05 \pm 0.10}{(0.041 - 0.004)}$ |
| Sprocket Hole          | d              | $\frac{1.55 \pm 0.05}{(0.061 - 0.002)}$ | $\frac{1.55 \pm 0.10}{(0.061 - 0.004)}$ |
| Reel Outside Diameter  | D              | $\frac{178}{(7.008)}$                   | $\frac{178}{(7.008)}$                   |
| Reel Inner Diameter    | D <sub>1</sub> | $\frac{60.0}{(2.362)}$ MIN.             | $\frac{60.0}{(2.362)}$ MIN.             |
| Feed Hole Diameter     | D <sub>2</sub> | $\frac{13.0 \pm 0.20}{(0.512 - 0.008)}$ | $\frac{13.0 \pm 0.20}{(0.512 - 0.008)}$ |
| Sprocket Hole Position | E              | $\frac{1.75 \pm 0.10}{(0.069 - 0.004)}$ | $\frac{1.75 \pm 0.10}{(0.069 - 0.004)}$ |
| Punch Hole Position    | F              | $\frac{3.50 \pm 0.05}{(0.138 - 0.002)}$ | $\frac{3.50 \pm 0.05}{(0.138 - 0.002)}$ |
| Punch Hole Pitch       | P              | $\frac{4.00 \pm 0.10}{(0.157 - 0.004)}$ | $\frac{4.00 \pm 0.10}{(0.157 - 0.004)}$ |
| Sprocket Hole Pitch    | P <sub>0</sub> | $\frac{4.00 \pm 0.10}{(0.157 - 0.004)}$ | $\frac{4.00 \pm 0.10}{(0.157 - 0.004)}$ |
| Embossment Center      | P <sub>1</sub> | $\frac{2.00 \pm 0.05}{(0.079 - 0.002)}$ | $\frac{2.00 \pm 0.05}{(0.079 - 0.002)}$ |
| Overall Tape Thickness | T              | $\frac{0.20 \pm 0.05}{(0.008 - 0.002)}$ | $\frac{0.25 \pm 0.05}{(0.010 - 0.002)}$ |
| Tape Width             | W              | $\frac{8.00 \pm 0.20}{(0.315 - 0.008)}$ | $\frac{8.00 \pm 0.20}{(0.315 - 0.008)}$ |
| Reel Width             | W <sub>1</sub> | $\frac{13.5}{(0.531)}$ MAX.             | $\frac{13.5}{(0.531)}$ MAX.             |
| Quantity per Reel      | --             | 4,000                                   | 4,000                                   |

REV. 10/09

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.