




Copyright FCI.

D


C


B

A



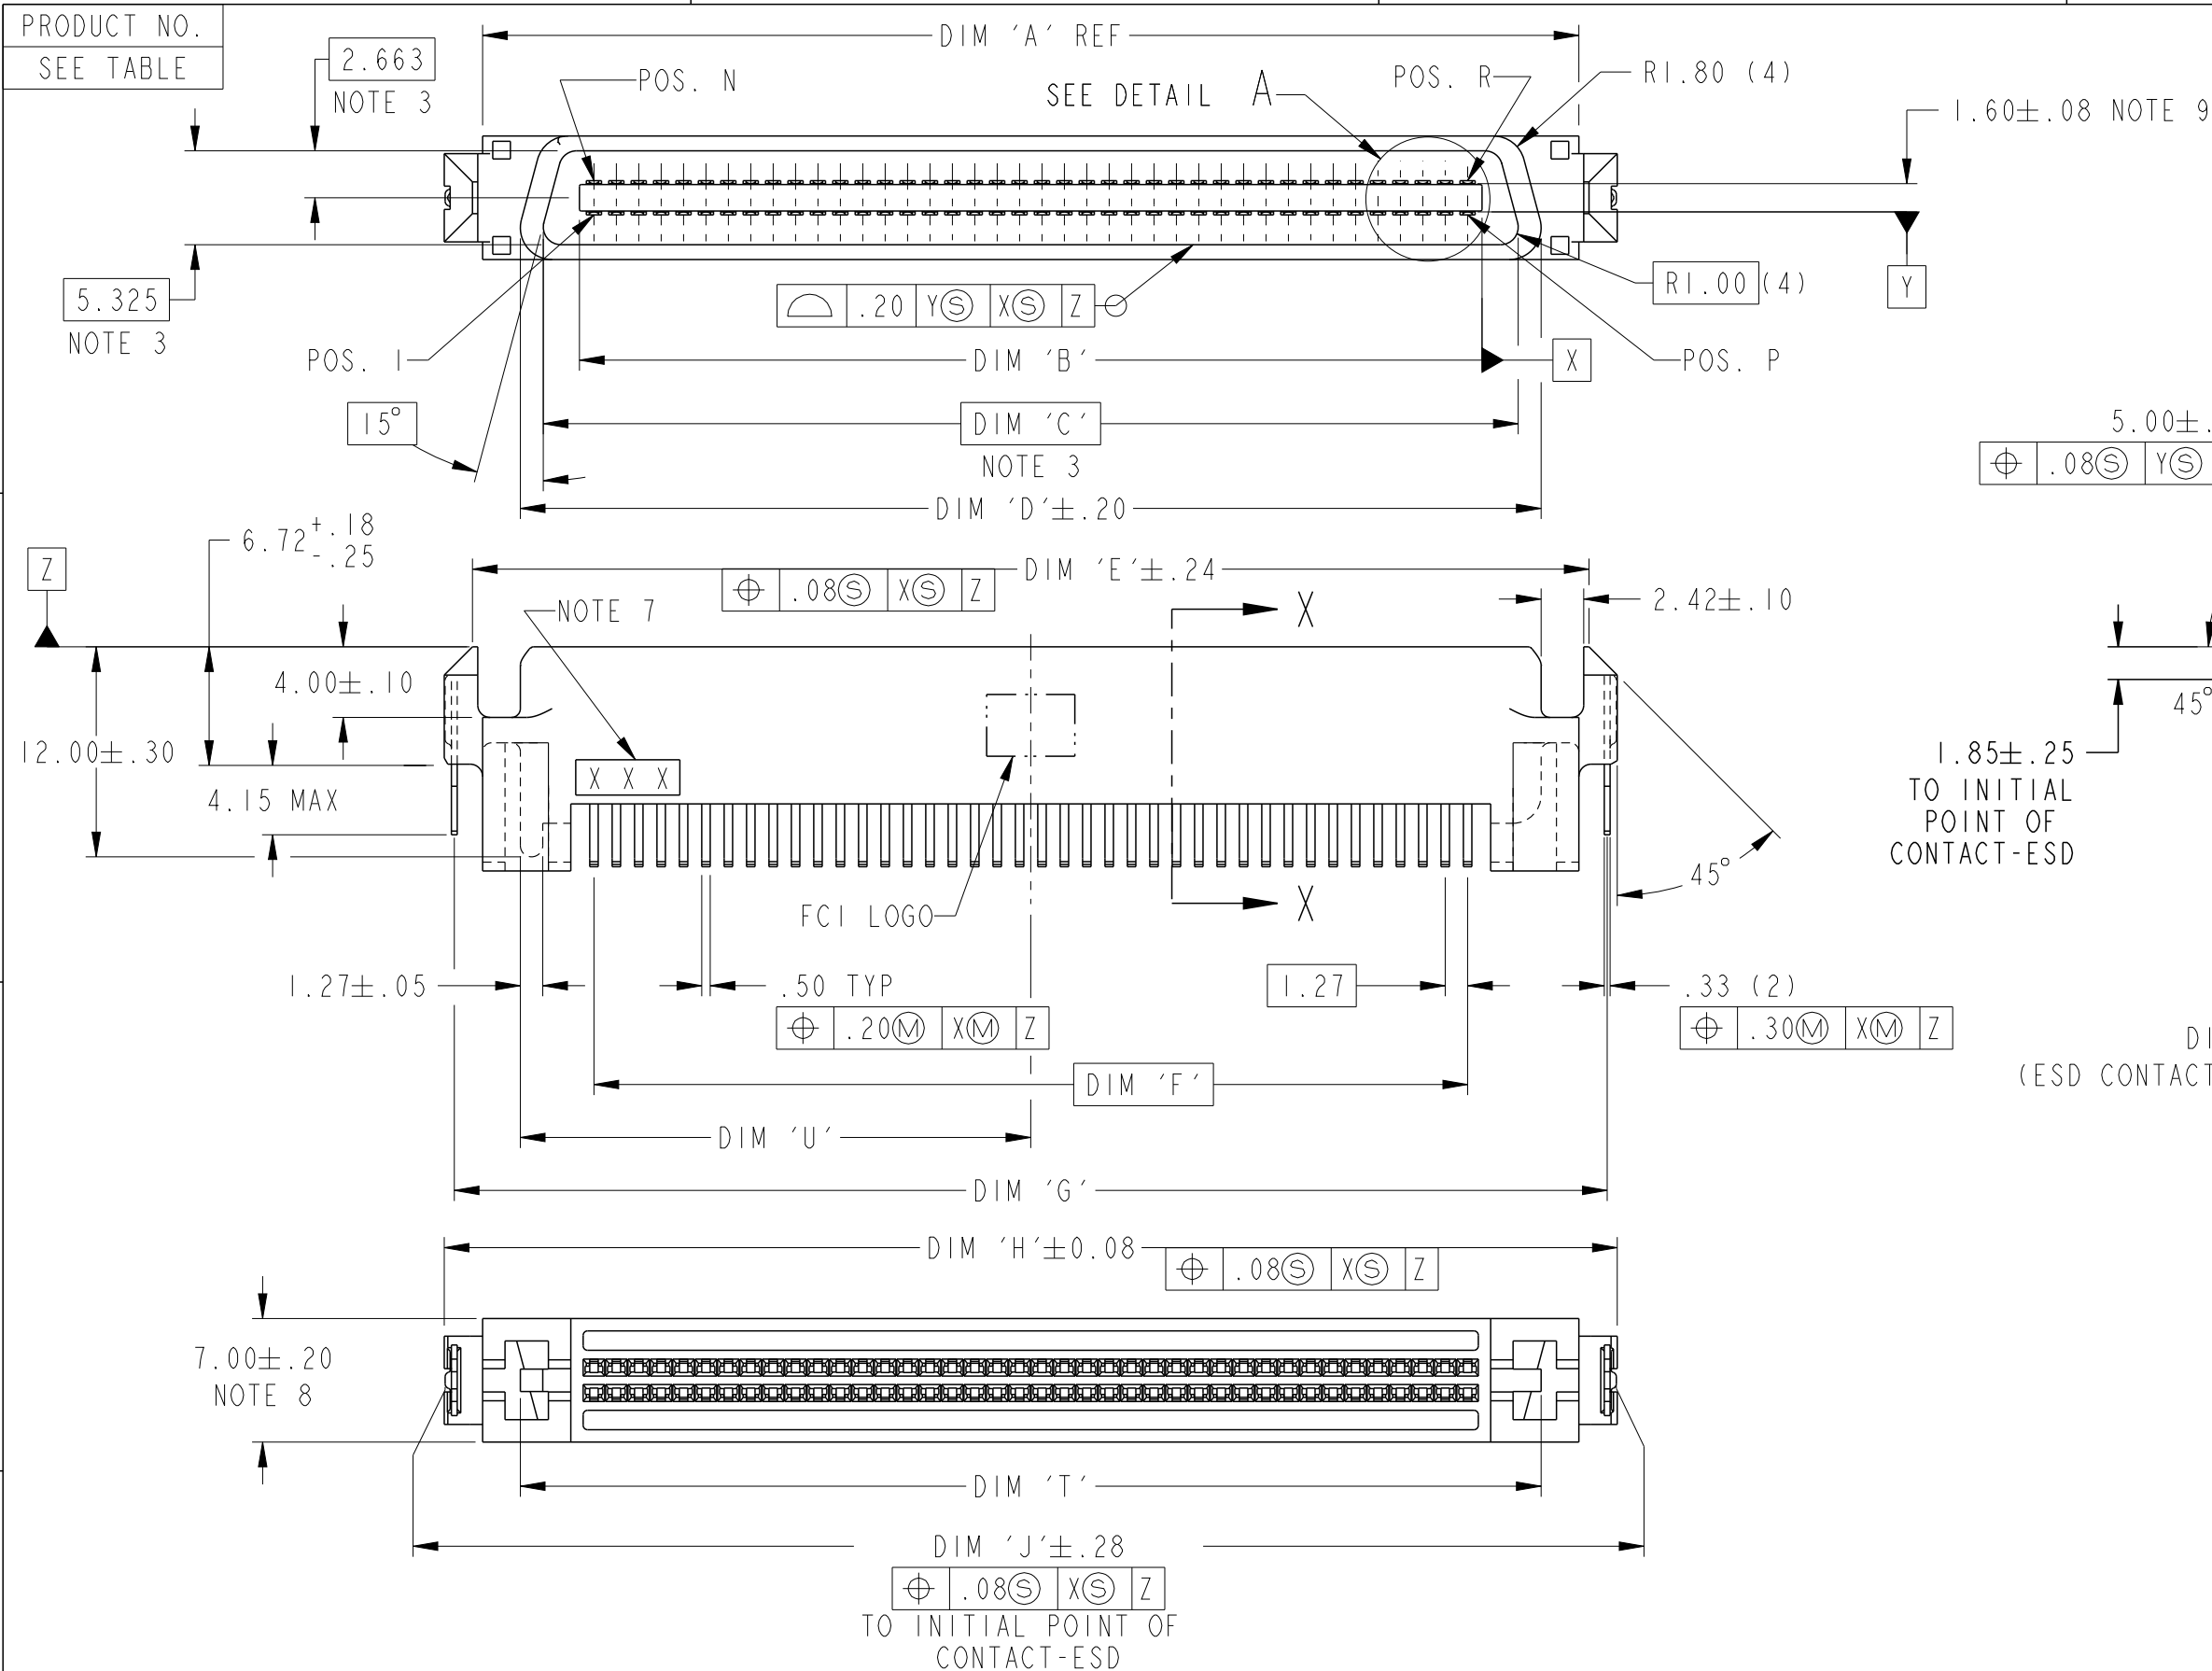


CONFIDENTIAL

spec ref -		dr Louis Ng		2011/05/11		projection 	MM 	size A3	scale 5:2	
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng Guat-Lian Loo	2012/10/10				ecn no ELX-S-005680-1		
			chr -	-				rel level Released		
			appr Chen-Hong Tan	2012/10/10						
product family SCA-2										
surface  ISO 1302	linear	0.X	±.3		title SCA-2 PLUG CONNECTOR STRADDLE MOUNT			dwg no 71292	rev U	
		0.XX	±.13							
		0.XXX	±.051							
	angular	0°	±2°	www.fci.com	cat. no. -			Product - Customer Drw		sheet 1 of 4

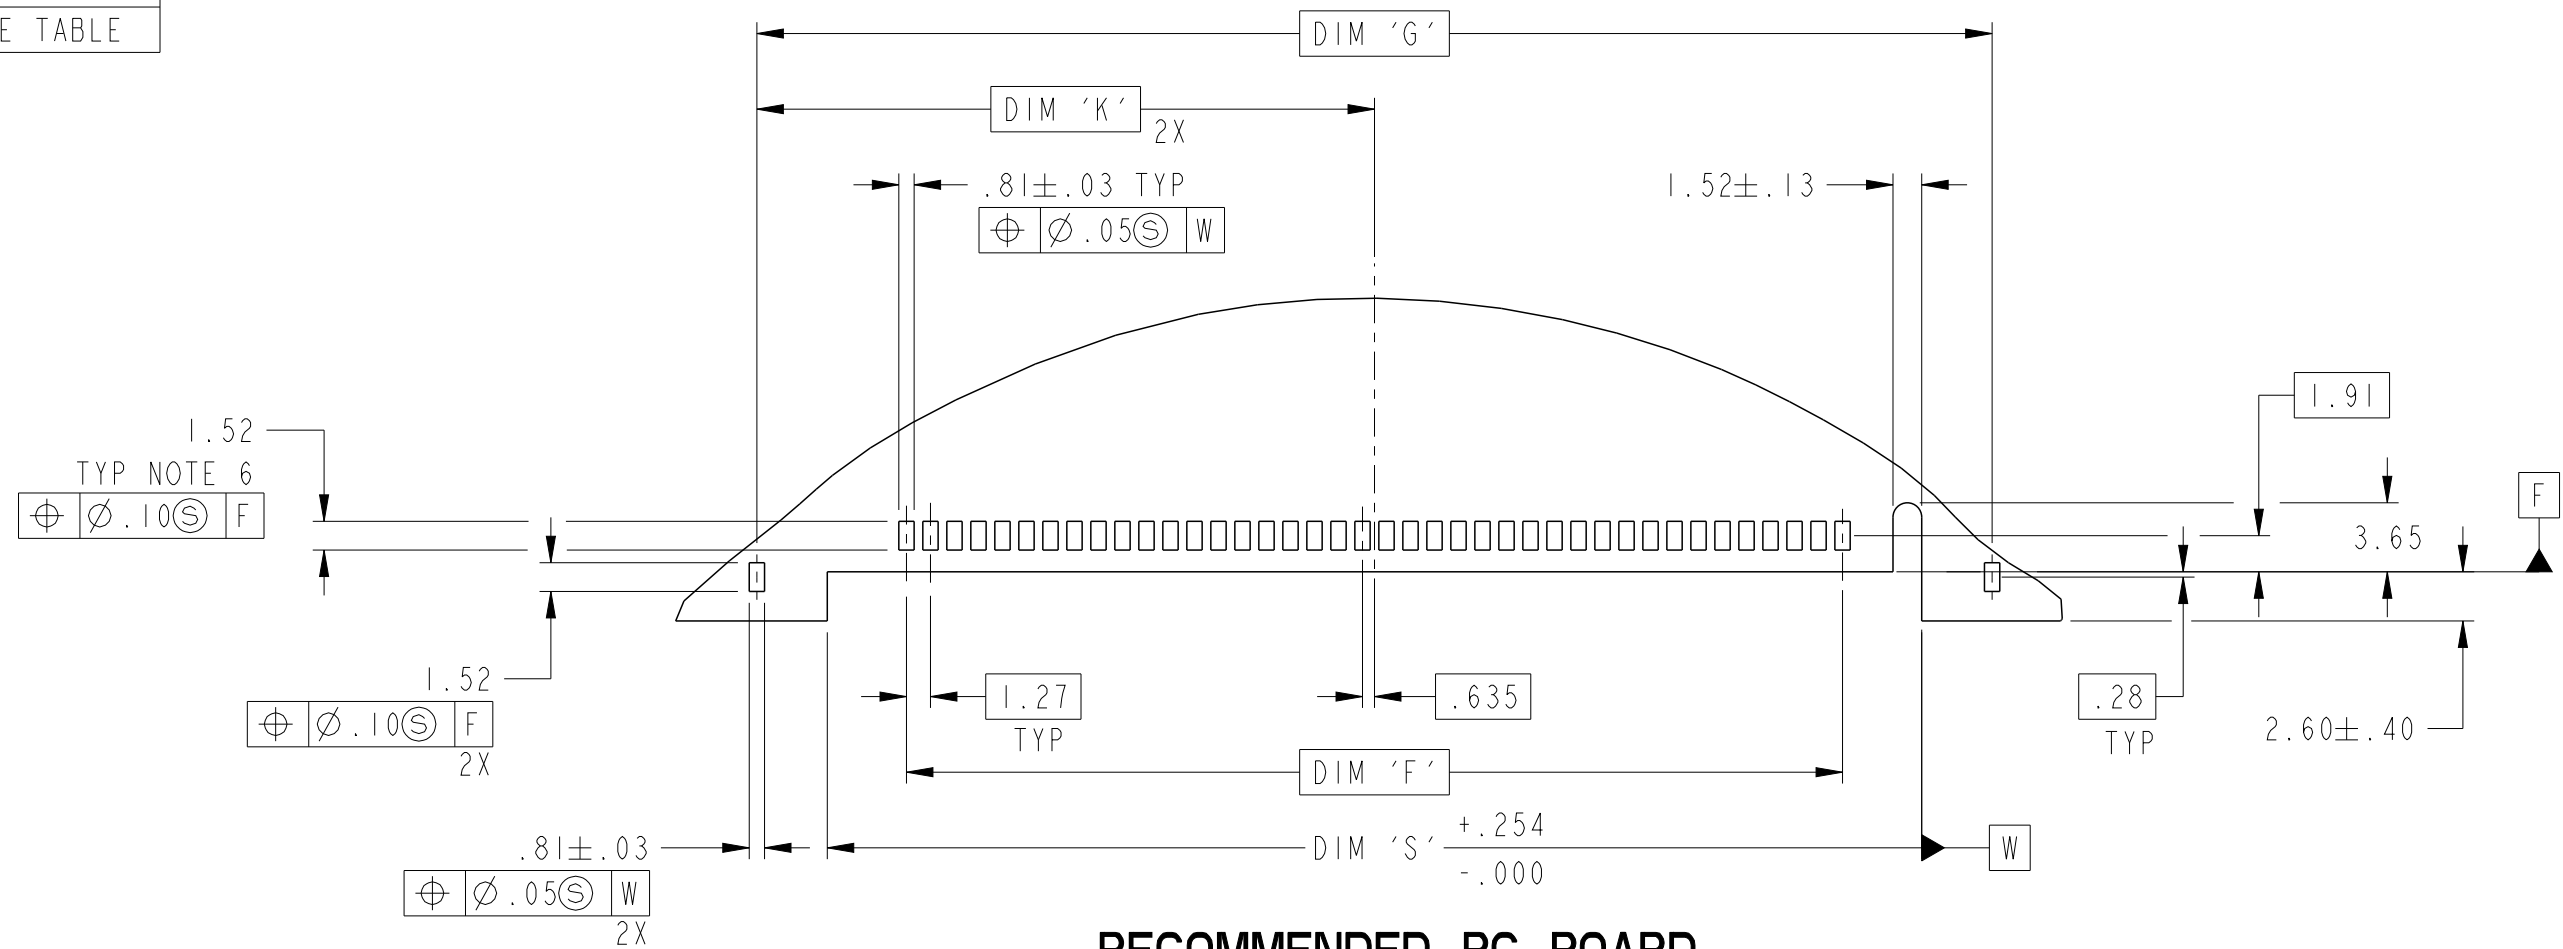

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

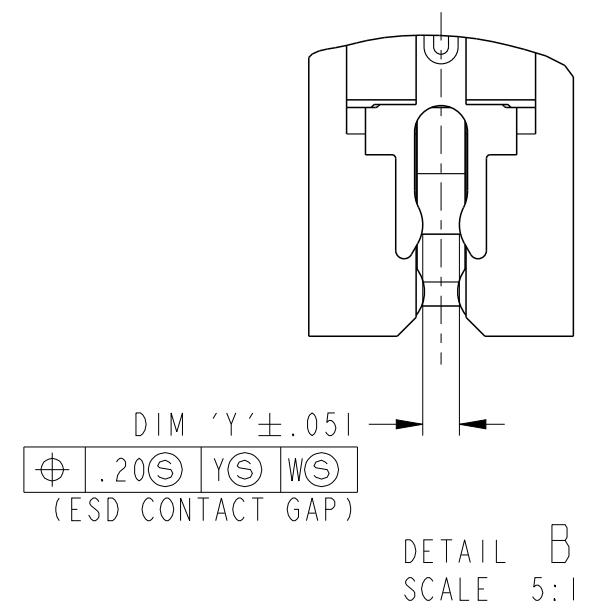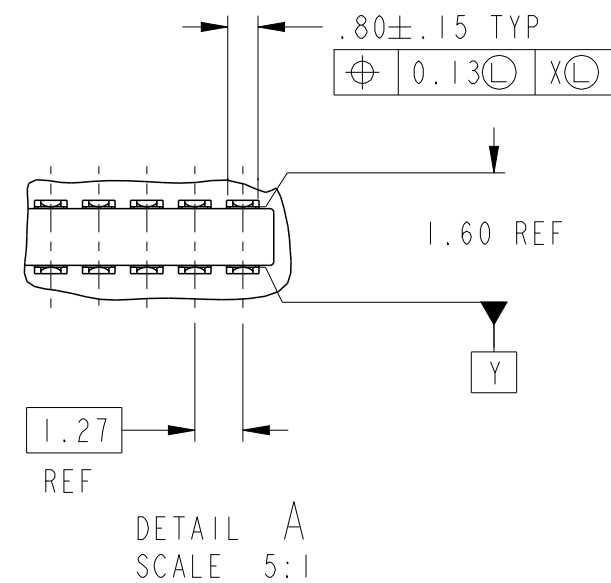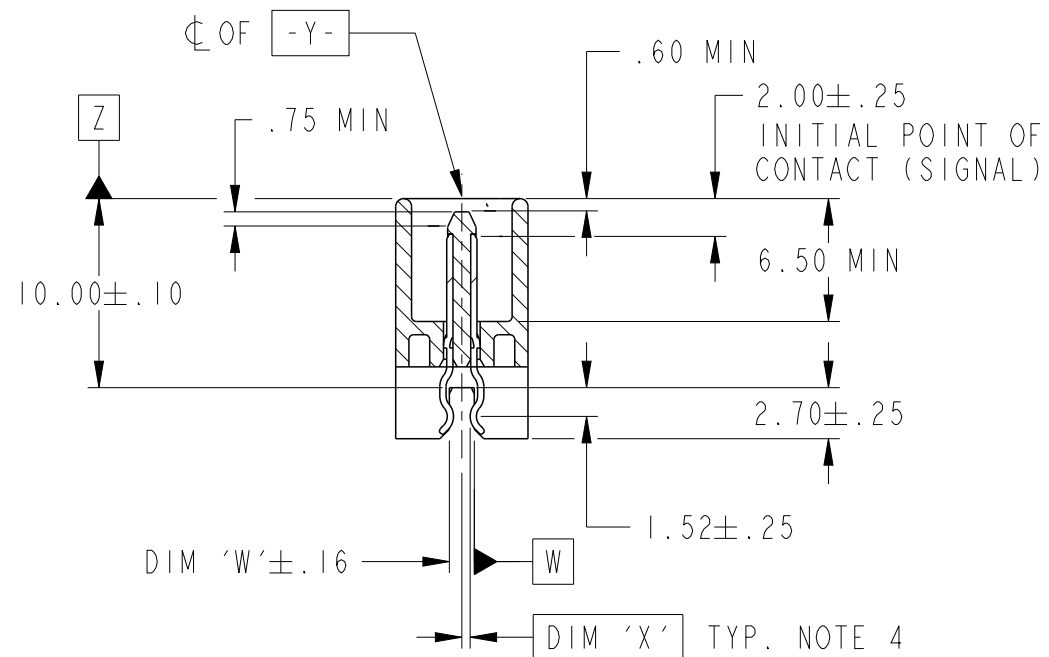

SECTION X - X
SCALE 5:2

CONFIDENTIAL

spec ref		-		dr		Louis Ng		2011/05/11		projection		MM		size		A3		scale		5:2					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Guat-Lian Loo		2012/10/10						ecn no		ELX-S-005680-1							
ISO 406						chr		-		-															
ISO 1101						appr		Chen-Hong Tan		2012/10/10												product family			
surface 		linear		0.X		±.3				title		SCA-2 PLUG CONNECTOR				dwg no		71292				rev		U	
				0.XX		±.13																			
				0.XXX		±.051																			
ISO 1302		angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw				sheet 2 of 4							

A

B

C

D

PRODUCT NO.	NO. POS.	RECOMMENDED PCB THICKNESS	DIM A REF	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM J	DIM K	POS. N	POS. P	POS. R	DIM S	DIM T	DIM U	DIM V	DIM W	DIM X	DIM Y	PLATING
71292-001	80	1.19	62.15	51.17	55.27	57.87	63.30	49.53	65.36	66.50	66.40	32.68	41	40	80	57.91	57.82	28.88	1.32	1.30	0.44	0.97	NOTE 2
-001S																							NOTE 10
-101S																							NOTE 10
71292-002	40	1.19	36.75	25.77	29.87	32.47	37.90	24.13	39.95	41.10	41.00	19.98	21	20	40	32.52	32.41	16.20	1.32	1.30	0.44	0.97	NOTE 2
-002S																							NOTE 10
-102S																							NOTE 10
71292-003S	80	1.57	62.15	51.17	55.27	57.87	63.30	49.53	65.36	66.50	66.40	32.68	41	40	80	57.91	57.82	28.88	1.83	1.83	0.72	1.52	NOTE 2
-103S																							NOTE 10
71292-004S	40	1.57	36.75	25.77	29.87	32.47	37.90	24.13	39.95	41.10	41.00	19.98	21	20	40	32.52	32.41	16.20	1.83	1.83	0.72	1.52	NOTE 2
-104S																							NOTE 10



NOTES:

1. HOUSING : LCP, UL94V-0 RATED, COLOR: BLACK
CONTACTS: PHOSPHOR-BRONZE
ESD CONTACT: PHOSPHOR-BRONZE

2. PLATING:
CONTACTS: 0.76µm (30µ") MIN GXT IN CONTACT AREA,
2.54µm (100µ") MIN TIN-LEAD ON P.C. BOARD LEG,
1.27µm (50µ") MIN NICKEL UNDERPLATE OVER ENTIRE
TERMINAL.
ESD CONTACT: 2.54µm (100µ") MIN TIN-LEAD
PLATING W/1.27µm (50µ") NICKEL UNDERPLATE.

③ MEASURED AT THE FLOOR OF THE CAVITY MEASURED
6mm FROM DATUM -Z-

④ APPLIES TO ALL SURFACES OF CONTACT TAILS.

⑤ MAXIMUM BOARD THICKNESS THAT CONNECTOR CAN
ACCOMMODATE IS DEFINED BY DIM 'V'.

⑥ THESE DIMENSIONS RESULT IN THE CONTACT RESTING
IN CENTER OF PAD WIDTH. THESE DIMENSIONS ARE
SUBJECT TO CHANGE DEPENDING ON CUSTOMER'S
MANUFACTURING PREFERENCES IN PROCESS SOLDER
PLACEMENT AND REFLOW.

⑦ DATE CODE IN THIS AREA.
- ⑧ MEASUREMENT MADE AT CENTER OF PART, MAY BE
AS LOW AS 6.55. DESIGN TO BE MADE TO ACHIEVE
THE NOMINAL DIMENSION ACROSS THE ENTIRE PART.

⑨ DISTANCE MEASURED ACROSS CONTACT MATING SURFACES
ALONG EFFECTIVE MATING AREA AND CONTACT MUST BE
ABOVE PLASTIC ALONG EFFECTIVE MATING AREA.

10. PLATING:
CONTACTS: 0.76µm (30µ") MIN GOLD IN CONTACT AREA,
2.54µm (100µ") MIN TIN-LEAD ON P.C. BOARD LEG,
1.27µm (50µ") MIN NICKEL UNDERPLATE OVER ENTIRE
TERMINAL.
ESD CONTACT: 2.54µm (100µ") MIN TIN-LEAD
PLATING W/1.27µm (50µ") NICKEL UNDERPLATE.

11. PART NUMBERS ENDING IN -0xx OR -0xxS OR -1xxS ARE
MANUFACTURED WITH BRIGHT FINISH TIN-LEAD PLATING
IN P.C. BOARD LEG AREA.

CONFIDENTIAL

spec ref		-		dr		Louis Ng	2011/05/11	projection	MM	size		A3	scale		5:2				
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng		Guat-Lian Loo	2012/10/10			ecn no		ELX-S-005680-1							
				chr		-	-			product family				rel level		Released			
				appr		Chen-Hong Tan	2012/10/10												
ISO 406				FCi		title		SCA-2 PLUG CONNECTOR				dwg no		71292		rev		U	
ISO 1101																			
surface		linear		0.X		±.3		www.fci.com		cat. no.		-		Product - Customer Drw				sheet 3 of 4	
ISO 1302		angular		0°		±2°													
				0.XX		±.13													
				0.XXX		±.051													

A

B

C

D

1				2								3						4					
PRODUCT NO.	NO. POS.	RECOMMENDED PCB THICKNESS	DIM A REF	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM J	DIM K	POS. N	POS. P	POS. R	DIM S	DIM T	DIM U	DIM V	DIM W	DIM X	DIM Y	PLATING
71292-001LF	80	1.19	62.15	51.17	55.27	57.87	63.30	49.53	65.36	66.50	66.40	32.68	41	40	80	57.91	57.82	28.88	1.32	1.30	0.44	0.97	NOTE 16
-201LF																							NOTE 12
71292-002LF	40	1.19	36.75	25.77	29.87	32.47	37.90	24.13	39.95	41.10	41.00	19.98	21	20	40	32.52	32.41	16.20	1.32	1.30	0.44	0.97	NOTE 16
-202LF																							NOTE 12
71292-003LF	80	1.57	62.15	51.17	55.27	57.87	63.30	49.53	65.36	66.50	66.40	32.68	41	40	80	57.91	57.82	28.88	1.83	1.83	0.72	1.52	NOTE 16
-203LF																							NOTE 12
71292-004LF	40	1.57	36.75	25.77	29.87	32.47	37.90	24.13	39.95	41.10	41.00	19.98	21	20	40	32.52	32.41	16.20	1.83	1.83	0.72	1.52	NOTE 16
-204LF																							NOTE 12

U

NOTES:

12. PLATING:CONTACT: 0.76µm (30µ") MIN GOLD IN CONTACT AREA, 2.54µm (100µ") - 5.08µm (200µ") TIN (LEAD-FREE) ON P.C. BOARD LEG, 1.27µm (50µ") MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL. ESD CONTACT: 2.54µm (100µ") - 5.08µm (200µ") TIN PLATING (LEAD-FREE) WITH 1.27µm (50µ") NICKEL UNDERPLATE.

13. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

14. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

15. PART NUMBERS ENDING IN "LF" MEANS FOR NOTE 14 LEAD FREE IDENTIFICATION. P/N XXXXX-2XXLF IS EQUIVALENT TO PREVIOUS P/N XXXXX-2XX.

16. PLATING:CONTACT: 0.76µm (30µ") MIN GXT IN CONTACT AREA, 2.54µm (100µ") - 5.08µm (200µ") TIN (LEAD-FREE) ON P.C. BOARD LEG, 1.27µm (50µ") MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL. ESD CONTACT: 2.54µm (100µ") - 5.08µm (200µ") TIN PLATING (LEAD-FREE) WITH 1.27µm (50µ") NICKEL UNDERPLATE.

17. A

U

 SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

spec ref -												dr	Louis Ng	2011/05/11	projection	MM	size	A3	scale	5:2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED										eng	Guat-Lian Loo	2012/10/10	ecn no			ELX-S-005680-1			
											chr	-	-							
											appr	Chen-Hong Tan	2012/10/10	product family			SCA-2		rel level	
surface ✓	linear	0.X	±.3	FCI www.fci.com	title	SCA-2 PLUG CONNECTOR STRADDLE MOUNT					cat. no.	-	Product - Customer Drw	dwg no	71292		rev	U		
		0.XX	±.13																	
		0.XXX	±.051																	
ISO 1302	angular	0°	±2°													sheet 4 of 4				

A

B

C

D



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.