



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20

© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


| LOC | DIST | REVISIONS | | | | | | |
|-----|------|-----------|-----|------------------|---------------|-----------|-----|------|
| | | P | LTR | DESCRIPTION | ECN | DATE | DWN | APVD |
| J | - | | A1 | PART NO ADDITION | | 22MAR2007 | M.M | D.M |
| | | | A2 | DRAFTING ERROR | ECR-07-005648 | 23OCT2007 | M.M | S.M |
| | | | B | REVISED | ECR-07-025215 | 07NOV2008 | M.M | A.O |
| | | | C | REVISED | | 25NOV2009 | Y.O | T.K |

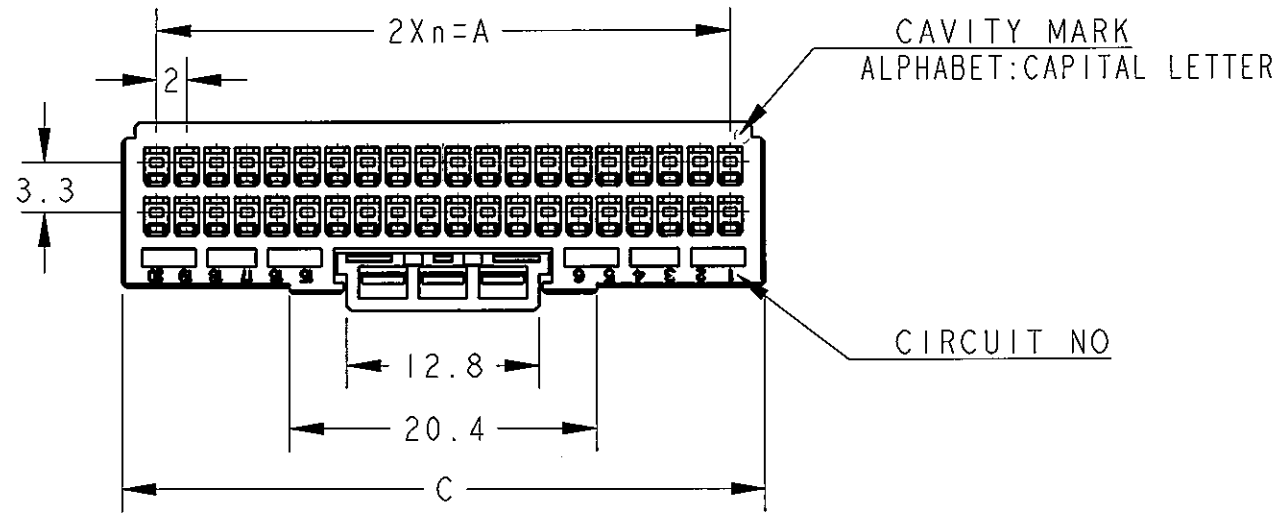


- ① MATERIAL: GLASS FILED THERMO PLASTIC POLYESTER(94V-0), COLOR: BLACK
- 2. THE SHAPE, SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLINE. THEY DON'T SHOW DETAILS.
- 3. THE KEYING ARRANGEMENT OF "Y" IS SYMMETRIC WITH "X".

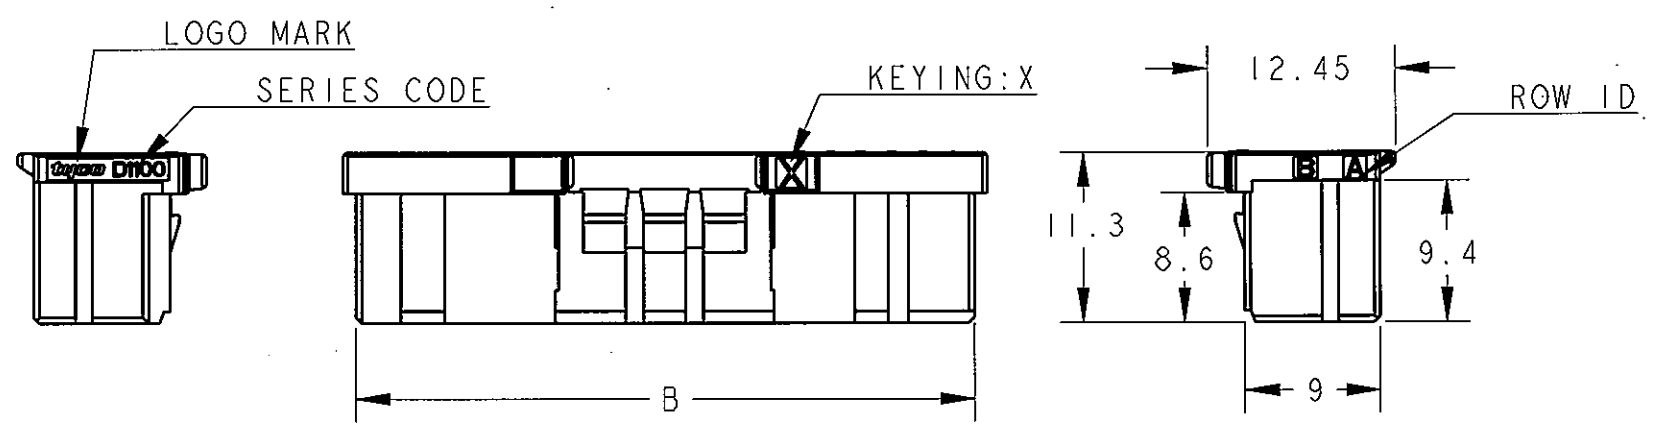

- ① 材料: ガラス入り熱可塑性ポリエステル樹脂(94V-0), 色: 黒
- 2. 文字の形状、大きさ、および位置については、大略を示すものであり、詳細を示すものではありません。
- 3. Y KEY形状はX KEY形状と左右対称

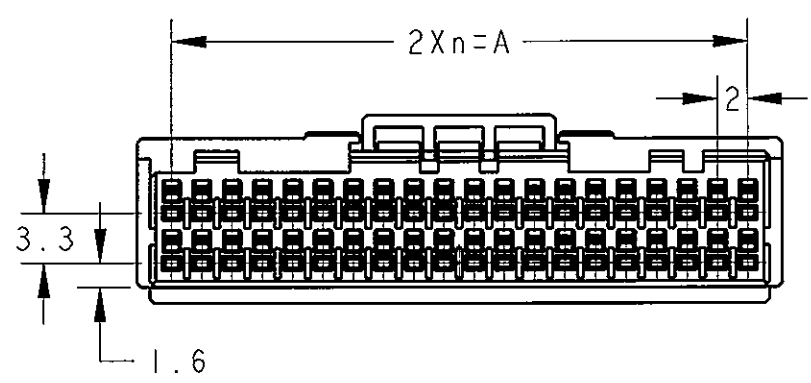

| 40 | Y | 19 | 38.0 | 40.9 | 42.6 | 2-1827863-0 |
|-----|-----|----|------|------|------|-------------|
| 40 | X | 19 | 38.0 | 40.9 | 42.6 | 1-1827863-0 |
| 34 | Y | 16 | 32.0 | 34.9 | 36.6 | 2-1827863-7 |
| 34 | X | 16 | 32.0 | 34.9 | 36.6 | 1-1827863-7 |
| 32 | X | 15 | 30.0 | 32.9 | 34.6 | 1-1827863-6 |
| 30 | X | 14 | 28.0 | 30.9 | 32.6 | 1-1827863-5 |
| 28 | X | 13 | 26.0 | 28.9 | 30.6 | 1-1827863-4 |
| 26 | Y | 12 | 24.0 | 26.9 | 28.6 | 2-1827863-3 |
| 26 | X | 12 | 24.0 | 26.9 | 28.6 | 1-1827863-3 |
| 24 | X | 11 | 22.0 | 24.9 | 26.6 | 1-1827863-2 |
| 22 | X | 10 | 20.0 | 22.9 | 24.6 | 1-1827863-1 |
| POS | KEY | n | A | B | C | PART NO |

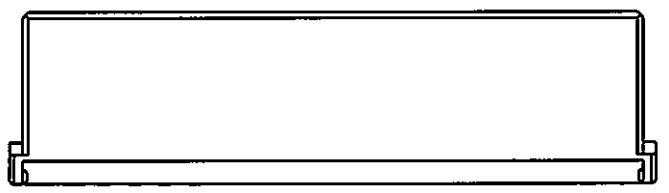

40POS(X-KEY): 1-1827863-0

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

| | | | | |
|----------------------------|---|--|---|-----------------|
| DIMENSIONS: 単位: 概 mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3, ±5° 0-PLC ± 1-PLC ±0.1 2-PLC ±0.02 3-PLC ±0.005 4-PLC ±0.0005 ANGLES ± | DWN T. KUDO 16MAR2005 CHK D. MITSUGI 23AUG2005 APVD D. MITSUGI 23AUG2005 | Tyco Electronics Corporation Kawasaki, Japan | |
| | MATERIAL 材料 | PRODUCT SPEC 製品規格 108-78268, 78298 | NAME 名称 DYNAMIC D1100D 2.0mmPITCH REC HSG 22-40POS | |
| | FINISH 仕上 | APPLICATION SPEC 取付適用規格 114-5377 | SIZE A3 | CAGE CODE 00779 |
| | | WEIGHT | DRAWING NO 番号 C-1827863 | RESTRICTED TO |
| | | CUSTOMER DRAWING | SCALE 尺度 2:1 | SHEET 1 OF 3 |

THIS DRAWING IS UNPUBLISHED.
















RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|------------------|------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| J | - | SEE SHEET 1 OF 3 | | | |

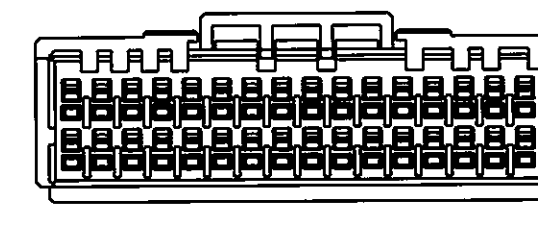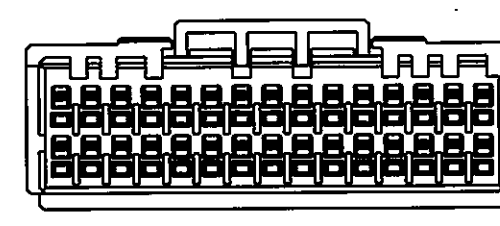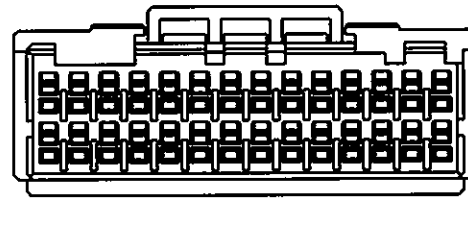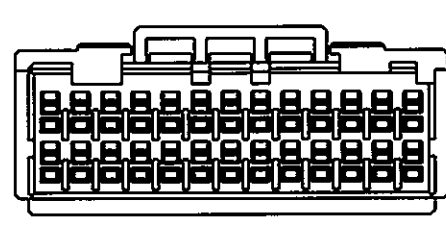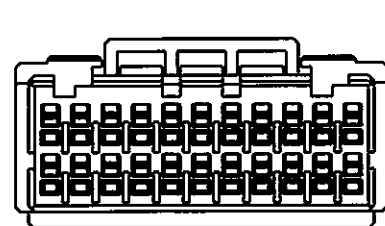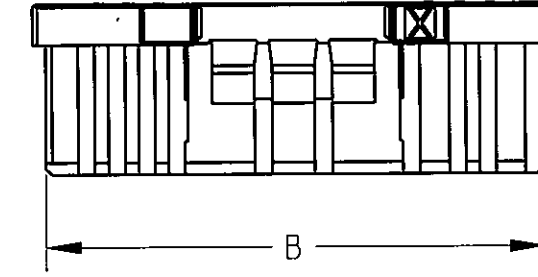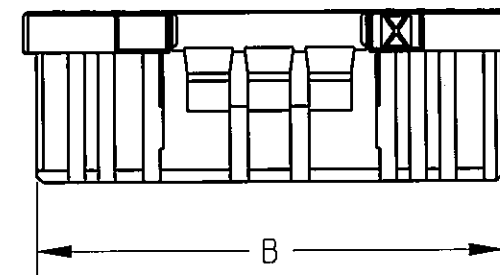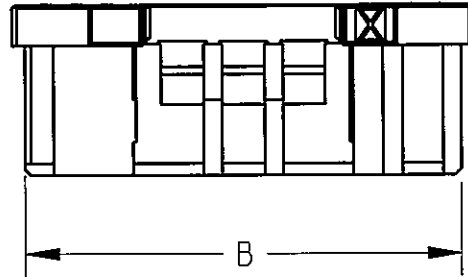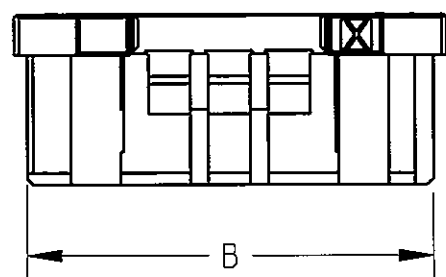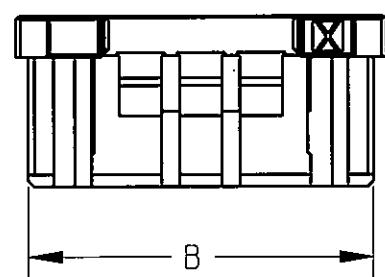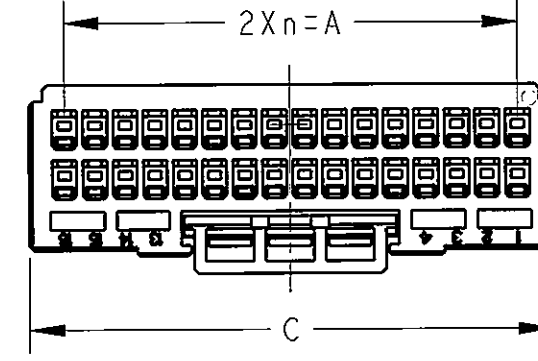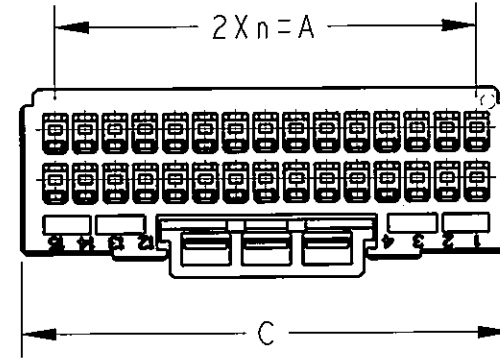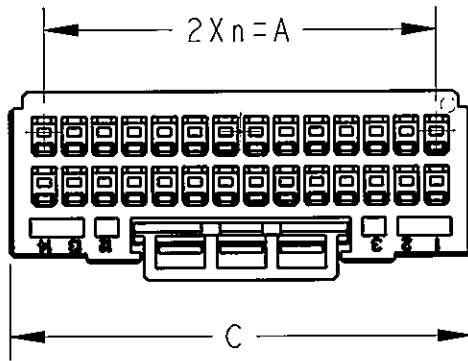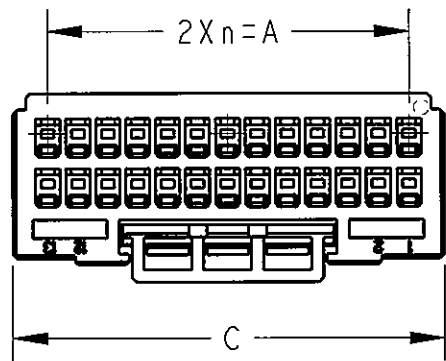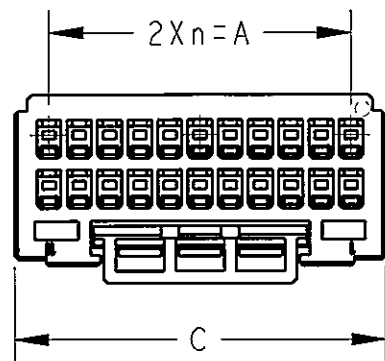

22POS(X-KEY): 1-1827863-1

26POS(X-KEY): 1-1827863-3

28POS(X-KEY): 1-1827863-4

30POS(X-KEY): 1-1827863-5

32POS(X-KEY): 1-1827863-6

| | | | | | | |
|--|--|--|---|-----------|------------|---------------|
| <small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small> | | DWN T. KUDO 16MAR2005 CHK D. MITSUGI 23AUG2005 APVD D. MITSUGI 23AUG2005 | Tyco Electronics Corporation Kawasaki, Japan | | | |
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± | PRODUCT SPEC 108-78268, 78298 APPLICATION SPEC 114-5377 | NAME DYNAMIC D1100D 2.0mmPITCH REC HSG 22-40POS | | | |
| MATERIAL | FINISH | WEIGHT | SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
| | | | A3 | 00779 | 1827863 | |
| CUSTOMER DRAWING | | | SCALE | SHEET | OF | REV |
| | | | 2:1 | 2 | 3 | C |

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1 OF 3

Top view of a 34-position connector. The width is labeled as $2Xn=A$ and the length is labeled as C.

Top view of a 24-position connector. The width is labeled as $2Xn=A$. The distance between the first two pins is 6.8, and the distance between the first and last pins is 14.4. The length is labeled as C.

Side view of a 34-position connector. The height is labeled as B.

SERIES CODE

LOGO MARK

KEYING: X

ROW ID

Detail view of the series code marking, showing the text "D1100".

Detail view of the logo mark and keying, showing the Tyco logo and the letter "X".

Detail view of the row ID marking, showing the text "A1".

Bottom view of a 34-position connector.

Bottom view of a 24-position connector.

34POS(X-KEY): 1-1827863-7

24POS(X-KEY): 1-1827863-2

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:

| | |
|--------|---|
| 0 PLC | ± |
| 2 PLC | ± |
| 3 PLC | ± |
| 4 PLC | ± |
| ANGLES | ± |

MATERIAL

FINISH

DWN T. KUDO 16MAR2005

CHK D. MITSUGI 23AUG2005

APVD D. MITSUGI 23AUG2005

PRODUCT SPEC

108-78268, 78298

APPLICATION SPEC

114-5377

WEIGHT

-

CUSTOMER DRAWING

Tyco Electronics Corporation
Kawasaki, Japan

NAME

DYNAMIC D1100D 2.0mmPITCH
REC HSG
22-40POS

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1827863

SCALE 2:1

SHEET 3 OF 3

REV C

AMP 1470-19 REV 31MAR2000



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.