

Feed-through terminal block - HDFK 50-VP/Z - 0711218

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Feed-through terminal block, Connection method: Screw connection, Bolt connection, Load current : 150 A, Cross section: 16 mm² - 50 mm², Connection direction of the conductor to plug-in direction: 0 °, Width: 18.8 mm, Color: gray

Product description


Feed-through terminal block, Connection method: Screw connection, Bolt connection, Load current : 150 A, Cross section: 16 mm² - 50 mm², Connection direction of the conductor to plug-in direction: 0 °, Width: 18.8 mm, Color: gray

Why buy this product

- Easy grouping with engagement pin versions
- Both terminal halves can be easily assembled by simply snapping them together
- Touch-proof insulating housing in a new design
- Molded versions ensure maximum tightness of seal
- Universal screw connection with screw locking
- Automatic compensation of the panel thickness via the snap principle integrated in the insulation housing



Key commercial data

| | |
|--------------------------------------|---|
| Packing unit | 1 |
| Minimum order quantity | 1 |
| Catalog page | Page 673 (CC-2011) |
| GTIN |  4 017918 311438 |
| Weight per piece (including packing) | 0.0 GRM |
| Weight per Piece (excluding packing) | 80.21 GRM |
| Country of origin | GREECE |

Technical data

General

| | |
|---|------|
| Number of levels | 1 |
| Number of connections | 2 |
| Color | gray |
| Insulating material | PA |
| Inflammability class according to UL 94 | V0 |

Feed-through terminal block - HDFK 50-VP/Z - 0711218

Technical data

Dimensions

| | |
|-------|---------|
| Width | 18.8 mm |
|-------|---------|

Technical data

| | |
|----------------------------------|---------------|
| Maximum load current | 150 A |
| Rated surge voltage | 8 kV |
| Pollution degree | 3 |
| Surge voltage category | III |
| Insulating material group | I |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current I _N | 150 A |
| Nominal voltage U _N | 690 V |

Connection data

| | |
|---|--------------------|
| Conductor cross section solid min. | 16 mm ² |
| Conductor cross section solid max. | 50 mm ² |
| Conductor cross section stranded min. | 16 mm ² |
| Conductor cross section stranded max. | 50 mm ² |
| Conductor cross section AWG/kcmil min. | 6 |
| Conductor cross section AWG/kcmil max | 1/0 |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 10 mm ² |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 50 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 10 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 50 mm ² |
| 2 conductors with same cross section, solid min. | 6 mm ² |
| 2 conductors with same cross section, solid max. | 16 mm ² |
| 2 conductors with same cross section, stranded min. | 10 mm ² |
| 2 conductors with same cross section, stranded max. | 16 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 6 mm ² |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 16 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 6 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 10 mm ² |
| Connection method | Screw connection |
| Stripping length | 24 mm |
| Internal cylindrical gage | B10 |
| Screw thread | M6 |
| Tightening torque, min | 6 Nm |
| Tightening torque max | 8 Nm |

Feed-through terminal block - HDFK 50-VP/Z - 0711218

Classifications

eClass

| | |
|------------|----------|
| eClass 4.0 | 27141131 |
| eClass 4.1 | 27141131 |
| eClass 5.0 | 27141134 |
| eClass 5.1 | 27141134 |
| eClass 6.0 | 27141134 |

etim

| | |
|----------|----------|
| ETIM 2.0 | EC001283 |
| ETIM 3.0 | EC001283 |
| ETIM 4.0 | EC001283 |

unspsc

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Approvals

Certificates

Certification

CSA / UL Recognized / GOST / PRS / GOST

Certification EX

Certification submitted

Approval details

| | |
|--------------------------------|-------|
| CSA | |
| mm ² /AWG/kcmil | 6 |
| Nominal current I _N | 125 A |
| Nominal voltage U _N | 600 V |

| | | |
|----------------------------|---|---|
| UL Recognized | | |
| | B | C |
| mm ² /AWG/kcmil | 6 | 6 |

Feed-through terminal block - HDFK 50-VP/Z - 0711218

Approvals

| | B | C |
|--------------------|-------|-------|
| Nominal current IN | 150 A | 150 A |
| Nominal voltage UN | 600 V | 600 V |

GOST

PRS

GOST

Accessories

Accessories

Marking

Zack marker strip - ZB10:SO/CMS - 1050525




Zack marker strip, white, For terminal block width: 10 mm


Drawings

Feed-through terminal block - HDFK 50-VP/Z - 0711218

Dimensioned drawing

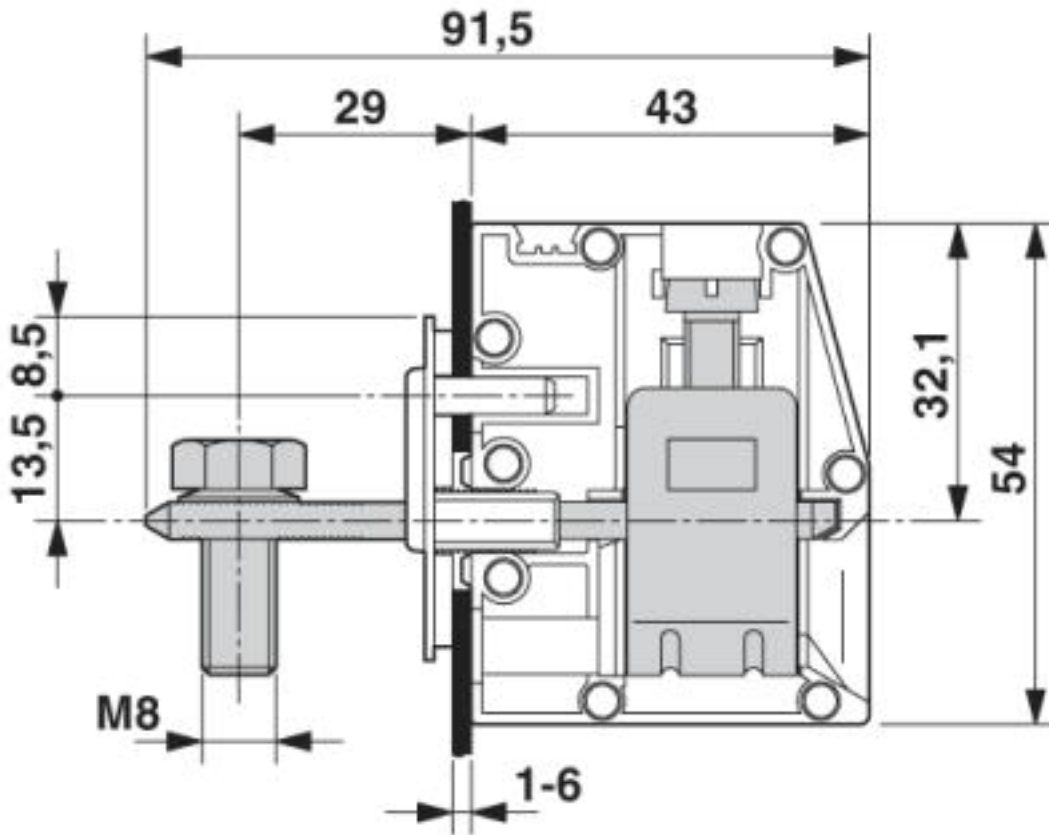

Dimensioned drawing

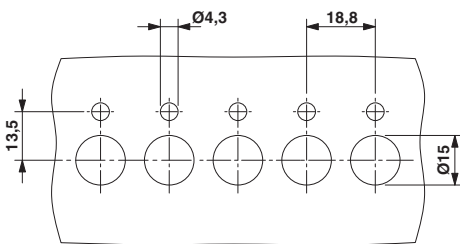



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.