

### FEATURES

- RoHS compliant
- Efficiency up to 80%
- Power density up to 0.85W/cm<sup>3</sup>
- Dual output from a single input rail
- UL 94V-0 package material
- No heatsink required
- Footprint from 1.17cm<sup>2</sup>
- Industry standard pinout
- Power sharing on output
- 1kVDC isolation
- 24V & 48V input
- 5V, 9V, 12V and 15V output
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required

### DESCRIPTION

The NMA series of DC/DC converters are the standard building blocks for on-board distributed power systems. They are ideally suited for providing dual rail supplies on primarily digital boards with the added benefit of galvanic isolation to reduce switching noise. All of the rated power may be drawn from a single pin provided the total load does not exceed 1 watt.

### SELECTION GUIDE

Order Code	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Isolation Capacitance	MTTF <sup>1</sup>	Package Style	Recommended Alternatives (click for data sheet)
	V	V	mA	%	pF	kHrs		
<b>Not recommended for new designs:</b>								
<b>NMA2405SC</b>	24	±5	±100	70	39	194	SIP	<b>MEA1D2405SC</b>
<b>NMA2409SC</b>	24	±9	±55	77	85	129		<b>MEA1D2409SC</b>
<b>NMA2412SC</b>	24	±12	±42	80	65	134		<b>MEA1D2412SC</b>
<b>NMA2415SC</b>	24	±15	±33	80	95	101		<b>MEA1D2415SC</b>
<b>Obsolete:</b>								
<b>NMA2405DC</b>	24	±5	±100	70	39	194	DIP	<b>MEA1D2405DC</b>
<b>NMA2409DC</b>	24	±9	±55	77	85	129		<b>MEA1D2409DC</b>
<b>NMA2412DC</b>	24	±12	±42	80	65	134		<b>MEA1D2412DC</b>
<b>NMA2415DC</b>	24	±15	±33	80	95	101		<b>MEA1D2415DC</b>
<b>NMA4805DC</b>	48	±5	±100	70	26	206	DIP	<b>MEA1D4805DC</b>
<b>NMA4809DC</b>	48	±9	±55	80	38	174		<b>MEA1D4809DC</b>
<b>NMA4812DC</b>	48	±12	±42	80	52	139		<b>MEA1D4812DC</b>
<b>NMA4815DC</b>	48	±15	±33	80	56	104		<b>MEA1D4815DC</b>
<b>NMA4805SC</b>	48	±5	±100	70	26	206	SIP	<b>MEA1D4805SC</b>
<b>NMA4809SC</b>	48	±9	±55	80	38	174		<b>MEA1D4809SC</b>
<b>NMA4812SC</b>	48	±12	±42	80	52	139		<b>MEA1D4812SC</b>
<b>NMA4815SC</b>	48	±15	±33	80	56	104		<b>MEA1D4815SC</b>

When operated with additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

### INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 24V input types	21.6	24	26.4	V
	Continuous operation, 48V input types	43.2	48	52.8	

### OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power <sup>2</sup>	T <sub>A</sub> =0°C to 70°C			1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub>			1.2	%/%
Load Regulation	10% load to rated load, 5V output types			15	%
	10% load to rated load, all other output types			10	
Ripple and Noise	BW=DC to 20MHz, all input types			150	mV p-p

### ABSOLUTE MAXIMUM RATINGS

Short-circuit protection <sup>3</sup>	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Internal power dissipation	450mW
Input voltage V <sub>IN</sub> , NMA24 types	28V
Input voltage V <sub>IN</sub> , NMA48 types	54V

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2. See derating graph.

3. Supply voltage must be discontinued at the end of the short circuit duration.

All specifications typical at T<sub>A</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

### ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC
Resistance	$V_{iso} = 500\text{VDC}$	10			$\text{G}\Omega$


### GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	All input types		100		kHz


### TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	0		70	
Storage		-55		150	$^{\circ}\text{C}$
Cooling	Free air convection				

### TEMPERATURE DERATING GRAPH

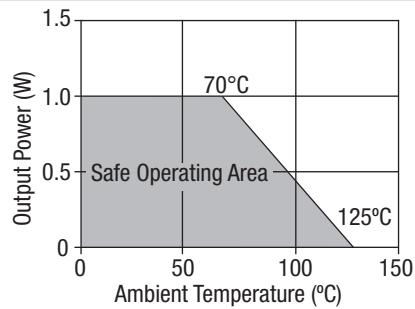

### TOLERANCE ENVELOPE

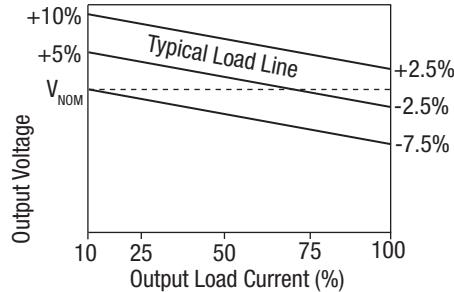

### TECHNICAL NOTES

#### ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMA series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the NMA series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.


#### REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMA series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

## PACKAGE SPECIFICATIONS

## MECHANICAL DIMENSIONS

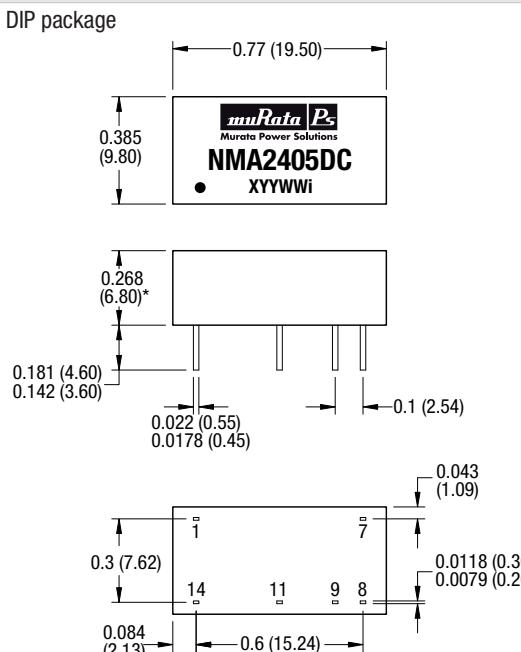


\* 0.303 (7.70) for 48V variants

\*\* 0.295 (7.50) for 48V variants

All dimensions in inches  $\pm 0.01$  (mm  $\pm 0.25$ mm). All pins on a 0.1 (2.54) pitch and within  $\pm 0.01$  (0.25) of true position.

## SIP package

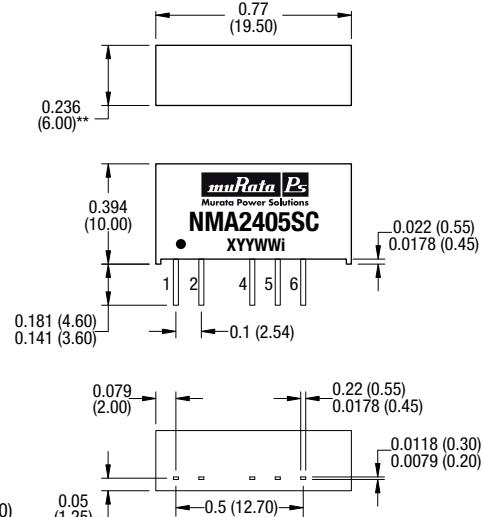

**Weight:**

2.4g (24V DIP)

2.9g (48V DIP)

2.2g (24V SIP)

2.9g (48V SIP)

## PIN CONNECTIONS - 14 PIN DIP

Pin	Function
1	-V <sub>IN</sub>
7	NC
8	OV
9	+V <sub>OUT</sub>
11	-V <sub>OUT</sub>
14	+V <sub>IN</sub>

#### PIN CONNECTIONS - 7 PIN SIP

Pin	Function
1	+V <sub>IN</sub>
2	-V <sub>IN</sub>
4	-V <sub>OUT</sub>
5	0V
6	+V <sub>OUT</sub>

#### **RoHS COMPLIANCE INFORMATION**




This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)


**PACKAGE SPECIFICATIONS (continued)**

**RECOMMENDED FOOTPRINT DETAILS**

**14 Pin DIP Package**

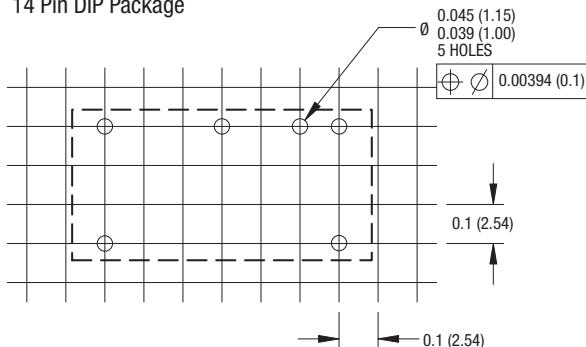


**7 Pin SIP Package**

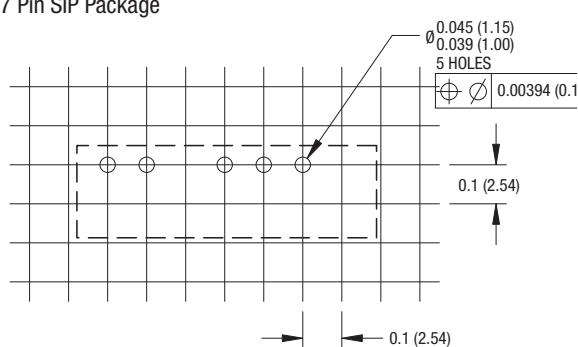


**TUBE OUTLINE DIMENSIONS**

**14 Pin DIP Tube**

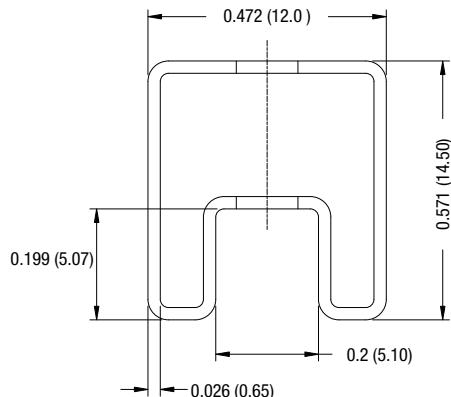

Unless otherwise stated all dimensions in inches (mm)  $\pm 0.5\text{mm}$ .  
 Tube length (14 Pin DIP) : 20.47 (520mm  $\pm 2\text{mm}$ ).  
 Tube length (7 Pin SIP) : 20.47 (520mm  $\pm 2\text{mm}$ ).

**7 Pin SIP Tube**

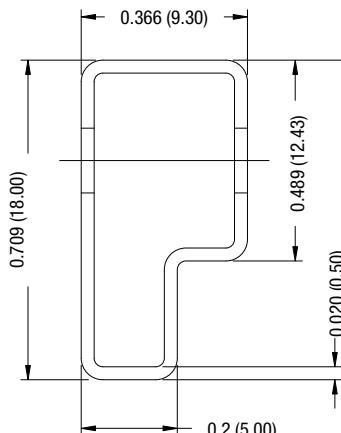

Tube Quantity : 25



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.