

VARIOFACE System Connection for PLC-INTERFACE PLC-V8/... and PLC-V8L/...


1. Brief Description

PLC-V8/FLK14/... are new VARIOFACE adapters, which connect the PLC-INTERFACE with the VARIOFACE system cabling. The PLC-V8 adapter is simply inserted in the jumper slots of eight PLC-INTERFACE modules mounted side by side. No additional tools are required. This results in an 8-channel relay or optocoupler module with a width of less than 50 mm (1.969 in.). The insertion of electromechanical or solid-state relays can be freely selected for each channel.

The various adapters for input/output functions can be recognized by their designations, which end with IN or OUT. Adapters with universal 15-pos. D-SUB connections are available with the **PLC-V8/D15...**

PLC-V8L/... adapters connect the PLC-INTERFACE 14 mm (0.551 in.) series (two Form C contacts, versions for high inrush current (IC), and high continuous current (HC)) with the VARIOFACE system cabling.

The **cross list** on this page enables the quick and precise selection of the appropriate adapter for the selected PLC-INTERFACE.

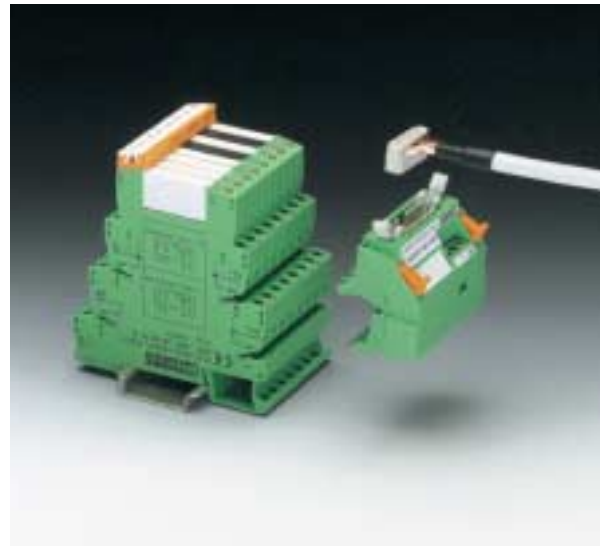


Cross list PLC-V8...

PLC-INTERFACE	Adapter PLC-V8/.../ IN	Adapter PLC-V8/.../ OUT
PLC-R...-12DC/21AU	•	
PLC-R...-24DC/21AU	•	•
PLC-R...-24UC/21AU	•	•
PLC-R...-48DC/21AU	•	
PLC-R...-60DC/21AU	•	
PLC-R...-120UC/21AU	•	
PLC-R...-230UC/21AU	•	
PLC-R...-24DC/21		•
PLC-R...-24UC/21		•
PLC-O...-24DC/48DC/100	•	•
PLC-O...-48DC/48DC/100	•	
PLC-O...-60DC/48DC/100	•	
PLC-O...-120UC/48DC/100	•	
PLC-O...-230UC/48DC/100	•	
PLC-O...-24DC/24DC/2		•
PLC-O...-24DC/230AC/1		•
PLC-R...-24DC/1ACT		•
PLC-O...-24DC/24DC/2/ACT		•
PLC-OSC-24DC/230AC/1/ACT		•
PLC-R...-24DC/1AU/SEN	•	
PLC-R...-120UC/1AU/SEN	•	
PLC-R...-230UC/1AU/SEN	•	
PLC-O...-24DC/48DC/100/SEN	•	
PLC-O...-120UC/48DC/100/SEN	•	
PLC-O...-230UC/48DC/100/SEN	•	
PLC-VT	•	•
PLC-VT/LA	•	•
PLC-VT/AKT		•
PLC-VT/AKT/LA		•

Cross list PLC-V8L...

PLC-INTERFACE	Adapter PLC-V8L/.../ OUT
PLC-RSC-24DC/21/21	•
PLC-RSC-24UC/21/21	•
PLC-RSC-24DC/21/21AU	•
PLC-RSC-24UC/21/21AU	•
PLC-RSC-24DC/1-1/ACT	•
PLC-RSC-24DC/1IC/ACT	•
PLC-RSC-24DC/HC	•

2. Technical Data

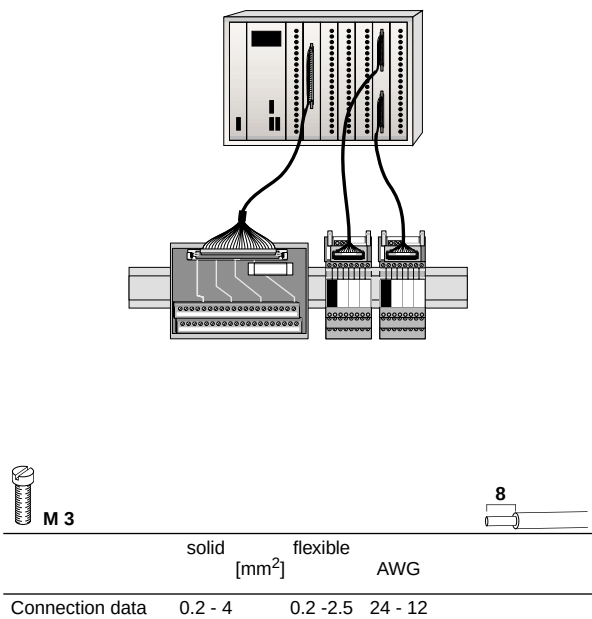


Description

VARIOFACE output adapter, for
8 PLC interfaces, with 14-pos. flat-ribbon cable connection,
for PLC system cabling

VARIOFACE input adapter, for
8 PLC interfaces, with 14-pos. flat-ribbon cable connection,
for PLC system cabling

Technical Data	
Operating voltage	24 V DC ±10%
Maximum permissible current:	1 A
Per signal path	3 A
Voltage supply	-20°C to +60°C (-4°F to +140°F)
Ambient operating temperature range	0.5 kV AC (60 s)
Test voltage	14-pos. flat-ribbon cable male connector according to IEC 603-1/DIN 41 651
Connection type:	Screw-cage connection 0.2 - 2.5 mm ² (24 - 12 AWG)
	IEC 664 (1980)/IEC 664A (1981)
	DIN VDE 0110/(1.89)
Standards/specifications	Degree of pollution 2
	Surge Voltage Category III

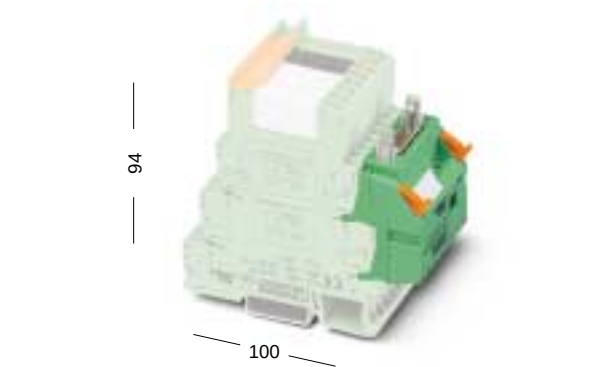

PLC-V8/FLK14/...


VARIOFACE adapter for 6.2 mm (0.244 in.) PLC-INTERFACE

Housing width 49.6 mm (1.953 in.)

Type	Order No.	Pcs. Pkt.
PLC-V8/FLK14/OUT	22 95 55 4	1
PLC-V8/FLK14/IN	22 96 55 3	1


24 V DC ±10%
1 A
3 A
-20°C to +60°C (-4°F to +140°F)
0.5 kV AC (60 s)
14-pos. flat-ribbon cable male connector according to IEC 603-1/DIN 41 651
Screw-cage connection 0.2 - 2.5 mm ² (24 - 12 AWG)
IEC 664 (1980)/IEC 664A (1981)
DIN VDE 0110/(1.89)
Degree of pollution 2
Surge Voltage Category III

Connection diagram for the PLC-V8/FLK14/OUT

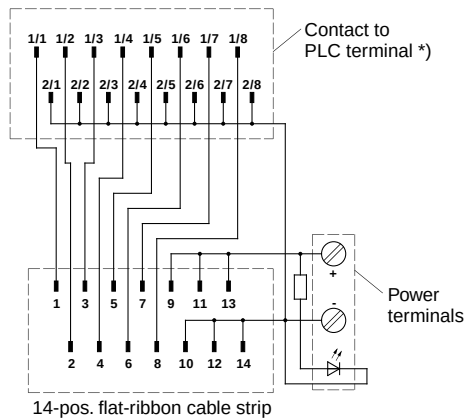



*) See last page

Connection diagram for the PLC-V8/FLK14/IN

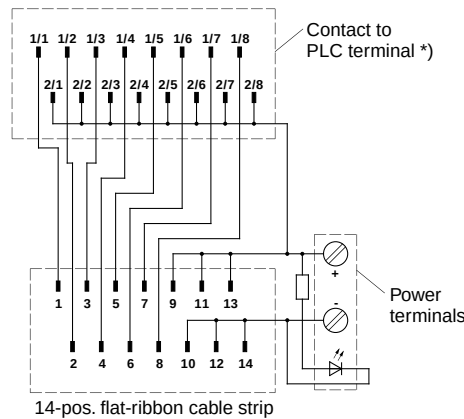

*) See last page

VARIOFACE System Connection for PLC-INTERFACE (6.2 mm [0.244 in.]) – PLC-V8/...

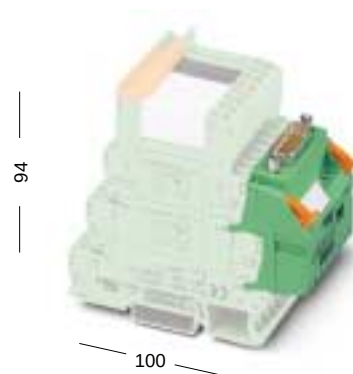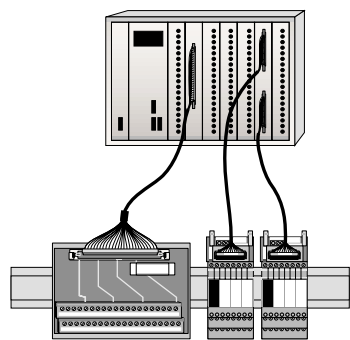

PLC-V8/D15...

VARIOFACE adapter for 6.2 mm (0.244 in.) PLC-INTERFACE

Housing width 49.6 mm (1.953 in.)

	solid [mm ²]	flexible AWG
Connection data	0.2 - 4	0.2 - 2.5 24 - 12

Description

VARIOFACE output adapter , for 8 PLC interfaces, with 15-pos. D-SUB connection	Male connector Female connector
VARIOFACE input adapter , for 8 PLC interfaces, with 15-pos. D-SUB connection	Male connector Female connector


Technical Data

Operating voltage	
Maximum permissible current:	Per signal path Voltage supply
Ambient operating temperature range	
Test voltage	
Connection type:	Signal level Voltage supply
Standards/specifications	

Type	Order No.	Pcs. Pkt.
PLC-V8/D15S/OUT	22 96 05 8	1
PLC-V8/D15B/OUT	22 96 06 1	1
PLC-V8/D15S/IN	22 96 07 4	1
PLC-V8/D15B/IN	22 96 08 7	1


24 V DC ±10%
1 A
3 A
-20°C to +60°C (-4°F to +140°F)
0.5 kV AC (60 s)
15-pos. D-SUB male connector according to IEC 807-2/DIN 41.652
Screw-cage connection 0.2 - 2.5 mm ² (24 - 12 AWG)
IEC 664 (1980)/IEC 664A (1981)
DIN VDE 0110/(1.89)
Degree of pollution 2
Surge Voltage Category III

Connection diagram for the PLC-V8/D15S/OUT
PLC-V8/D15B/OUT

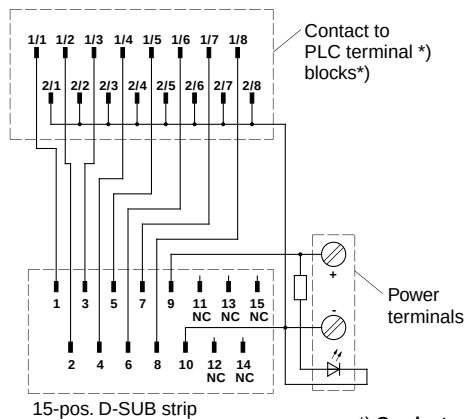


*) See last page

Connection diagram for the PLC-V8/D15S/IN
PLC-V8/D15B/IN

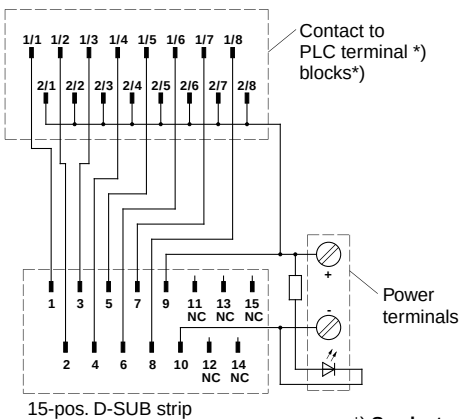

*) See last page

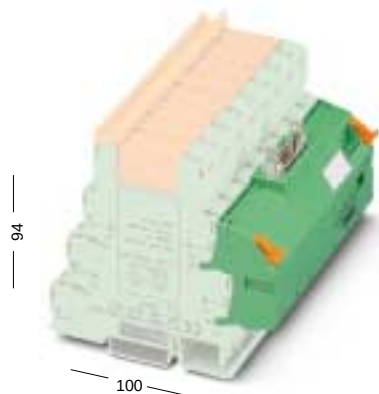

PLC-V8L/FLK14/OUT

VARIOFACE adapter for 14 mm (0.551 in.) PLC-INTERFACE

Housing width 112.3 mm (4.421 in.)

	solid [mm ²]	flexible	AWG
Connection data	0.2 - 4	0.2 - 2.5	24 - 12


Description
VARIOFACE output adapter, for 8 PLC interfaces (14 mm [0.551 in.]), with 14-pos. flat-ribbon cable connection, for PLC system cabling

Technical Data	
Operating voltage	
Maximum permissible current:	Per signal path Voltage supply
Ambient operating temperature range	
Test voltage	
Connection type:	Signal level
	Voltage supply
Standards/specifications	

Type	Order No.	Pcs. Pkt.
PLC-V8L/FLK14/OUT	22 99 66 0	1

24 V DC ±10%
1 A
3 A
-20°C to +50°C (-4°F to +122°F)
0.5 kV AC (60 s)
14-pos. flat-ribbon cable male connector according to IEC 603-1/DIN 41 651
Screw-cage connection 0.2 - 2.5 mm ² (24 - 12 AWG)
IEC 664 (1980)/IEC 664A (1981)
DIN VDE 0110/(1.89)
Degree of pollution 2
Surge Voltage Category III

Connection diagram for the PLC-V8L/FLK14/OUT

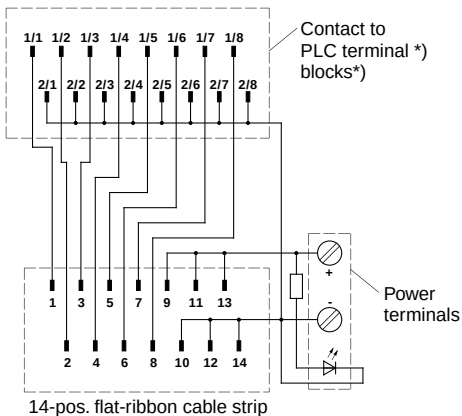

*) 1/1; 1/2; 1/3; ... 1/8 ≙ Lower jumper level of PLC-INTERFACE
2/1; 2/2; 2/3; ... 2/8 ≙ Upper jumper level of PLC-INTERFACE



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.