

OBSOLETE:

FOR INFORMATION PURPOSES ONLY

Contact Linear Technology for Potential Replacement

FEATURES

- **UL Recognized**  File E151738 to UL1577
- **No Secondary Power Supply**
- **Drives Any Logic Level FET**
- Low Input Current: 1mA Typ (LTC1177-5), 2.5mA Typ (LTC1177-12)
- Turns On in 1ms Typ and Turns Off in 1ms Typ
- 2500V_{RMS} of Isolation Voltage
- Isolates Input from High Voltage Transients at Load
- Clean, Bounce-Free Switching
- Current Limit
- Small Outline Package

APPLICATIONS

- Solid State Relay
- Isolated Solenoid Driver
- Isolated Motor Driver
- Isolated Lamp Driver

DESCRIPTION

The LTC[®]1177-5/LTC1177-12 are isolated high side MOSFET drivers. When used with an external N-channel MOSFET, the LTC1177-5/LTC1177-12 form an isolated solid state switch for reliable bounce-free switching operation. The output does not require an auxiliary power supply to maintain an on-state condition.

Two lead frame capacitors are used to transfer energy from the input to drive the gate of the MOSFET and provide the necessary isolation. Unlike optoisolated FET drivers, the input current for the LTC1177-5 is only 1mA and 2.5mA for LTC1177-12. It also does not have the aging problems endemic to optocouplers.


Both devices provide 2500V_{RMS} (1 minute) or 3000V_{RMS} (1 second) of output-to-input isolation.

The LTC1177-5/LTC1177-12 are available in the 18-pin PDIP or 28-pin SW package.


 LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

Isolated High Side Switch

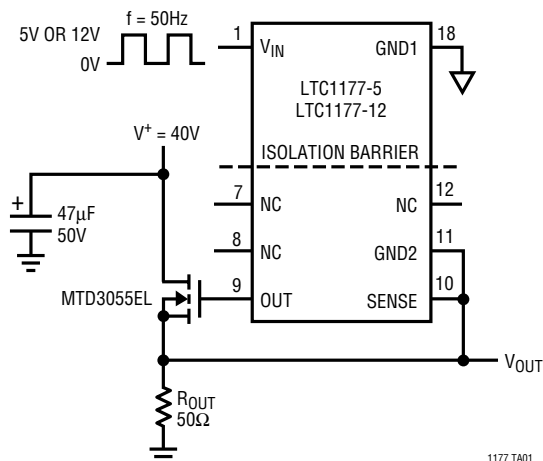

Input vs Output

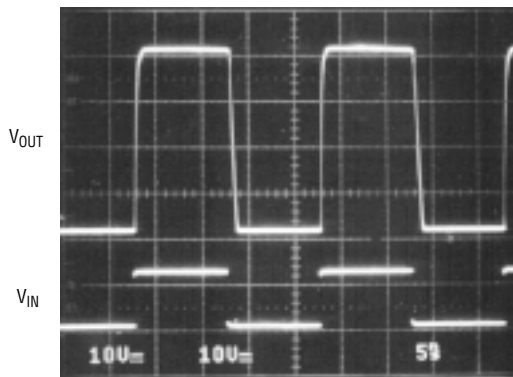

1177 TA02

LTC1177-5/LTC1177-12

ABSOLUTE MAXIMUM RATINGS

Input Voltages

V_{IN} (LTC1177-5) 6V to (GND1 – 0.3V)

V_{IN} (LTC1177-12) 13.2V to (GND1 – 0.3V)

Sense (LTC1177-5) 6V to (GND2 – 0.3V)

Sense (LTC1177-12) 12V to (GND2 – 0.3V)

Output Voltages 12V to (GND2 – 0.3V)

Operating Temperature Range



Commercial 0°C to 70°C

Industrial –40°C to 85°C

Storage Temperature Range –65°C to 150°C

Lead Temperature (Soldering, 10 sec) 300°C

PACKAGE/ORDER INFORMATION

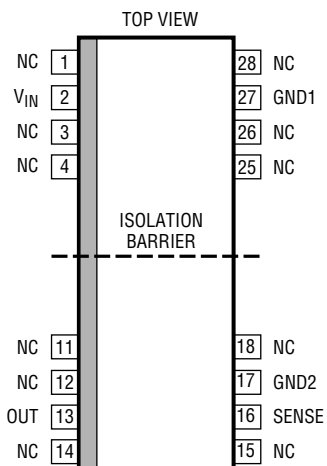 TOP VIEW N PACKAGE 18-LEAD PDIP ISOLATION BARRIER $T_{JMAX} = 125^{\circ}\text{C}$, $\theta_{JA} = 110^{\circ}\text{C/W}$	ORDER PART NUMBER	 TOP VIEW SW PACKAGE 28-LEAD PLASTIC SO WIDE ISOLATION BARRIER $T_{JMAX} = 125^{\circ}\text{C}$, $\theta_{JA} = 125^{\circ}\text{C/W}$	ORDER PART NUMBER
	LTC1177CN-5 LTC1177CN-12 LTC1177IN-5 LTC1177IN-12		LTC1177CSW-5 LTC1177CSW-12 LTC1177ISW-5 LTC1177ISW-12

Consult factory for Military grade parts.

ELECTRICAL CHARACTERISTICS

$V_{IN} = 5\text{V}$, $T_A = 25^{\circ}\text{C}$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		LTC1177-5			UNITS
				MIN	TYP	MAX	
V _{OUT}	Output Voltage (Refer to GND2)	C _{OUT} = 1000pF, No Load (N Pkg)	●	6.5	7.5	10	V
		C _{OUT} = 1000pF, No Load, V _{IN} = 4.75V (N Pkg)	●	5.5	6.5	10	V
		C _{OUT} = 1000pF, No Load (SW Pkg)	●	7.0	8.0	10	V
		C _{OUT} = 1000pF, No Load, V _{IN} = 4.75V (SW Pkg)	●	6.0	7.0	10	V
I _{IN}	Input Current	C _{IN} = 1000pF	●		1.0	1.5	mA
I _{LIM}	Current Limit	R _{SENSE} = 1Ω (LTC1177C-5)	●	400	620	800	mA
		R _{SENSE} = 1Ω (LTC1177I-5)	●	350	620	900	mA
t _{ON}	Turn-On Time	C _{OUT} = 1000pF, No Load (LTC1177C-5)	●		1.0	4.0	ms
		C _{OUT} = 1000pF, No Load (LTC1177I-5)	●		1.0	4.5	ms
t _{OFF}	Turn-Off Time	C _{OUT} = 1000pF, No Load	●		1.0	1.8	ms
V _{ISO}	Isolation Voltage	1 Minute (Note 1)		2500			V _{RMS}
		1 Second		3000			V _{RMS}
t _{CM}	Common Mode Slew Rate	V _{OUT} < 1.5, C _{OUT} = 1000pF				1000	V/μs

ELECTRICAL CHARACTERISTICS $V_{IN} = 12V$, $T_A = 25^\circ C$ unless otherwise noted.


SYMBOL	PARAMETER	CONDITIONS	LTC1177-12			UNITS
			MIN	TYP	MAX	
V_{OUT}	Output Voltage (Refer to GND2)	$C_{OUT} = 1000pF$, No Load (LTC1177C-12, N Pkg)	● 4.65	5.2	8	V
		$C_{OUT} = 1000pF$, No Load (LTC1177C-12, SW Pkg)	● 5.00	5.7	8	V
		$C_{OUT} = 1000pF$, $V_{IN} = 11.4V$ (LTC1177C-12, N Pkg)	● 4.40	4.9	7	V
		$C_{OUT} = 1000pF$, $V_{IN} = 11.4V$ (LTC1177C-12, SW Pkg)	● 4.60	5.3	7	V
		$C_{OUT} = 1000pF$, No Load (LTC1177I-12, N Pkg)	● 4.50	5.2	8	V
		$C_{OUT} = 1000pF$, No Load (LTC1177I-12, SW Pkg)	● 4.75	5.7	8	V
		$C_{OUT} = 1000pF$, $V_{IN} = 11.4V$ (LTC1177I-12, SW Pkg)	● 4.50	5.3	7	V
I_{IN}	Input Current	$C_{IN} = 1000pF$ (LTC1177C-12)	●	2.5	3.0	mA
		$C_{IN} = 1000pF$ (LTC1177I-12)	●	2.5	3.4	mA
I_{LIM}	Current Limit	$R_{SENSE} = 1\Omega$ (LTC1177C-12)	● 400	620	800	mA
		$R_{SENSE} = 1\Omega$ (LTC1177I-12)	● 350	620	900	mA
t_{ON}	Turn-On Time	$C_{OUT} = 1000pF$, No Load (LTC1177C-12)	●	1.0	2.5	ms
		$C_{OUT} = 1000pF$, No Load (LTC1177I-12, N Pkg)		1.0		ms
		$C_{OUT} = 1000pF$, No Load (LTC1177I-12, SW Pkg)	●	1.0	2.5	ms
t_{OFF}	Turn-Off Time	$C_{OUT} = 1000pF$, No Load (LTC1177C-12)	●	1.0	1.2	ms
		$C_{OUT} = 1000pF$, No Load (LTC1177I-12, N Pkg)		1.0		ms
		$C_{OUT} = 1000pF$, No Load (LTC1177I-12, SW Pkg)	●	1.0	1.5	ms
V_{ISO}	Isolation Voltage	1 Minute (Note 1)		2500		V_{RMS}
		1 Second		3000		V_{RMS}
TCM	Common Mode Slew Rate	$V_{OUT} < 1.5V$, $C_{OUT} = 1000pF$			1000	$V/\mu s$

The ● denotes specifications which apply over the full operating temperature range.


Note 1: Value derived from 1 second test.

TYPICAL PERFORMANCE CHARACTERISTICS


LTC1177-5
Turn-Off Time to $V_{OUT} = 1V$
vs Temperature

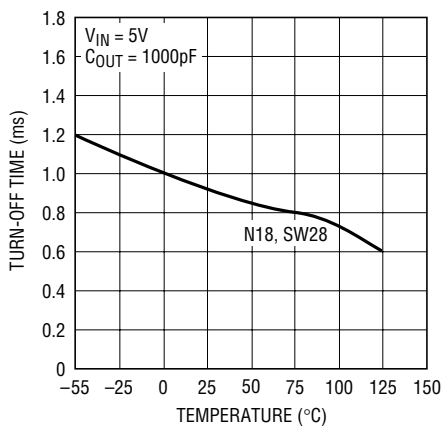

LTC1177-5
Turn-On Time to $V_{OUT} = 4.5V$
vs Temperature

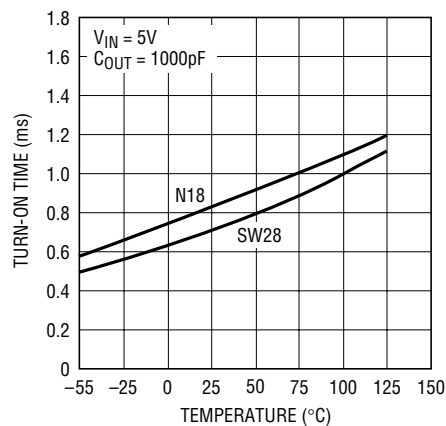


LTC1177-5
Output Current vs Output Voltage

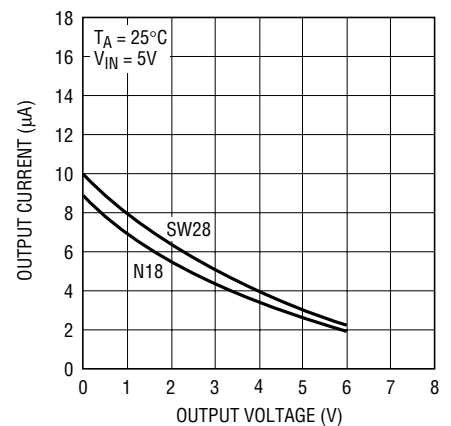


TYPICAL PERFORMANCE CHARACTERISTICS


LTC1177-5
Output Voltage vs Temperature

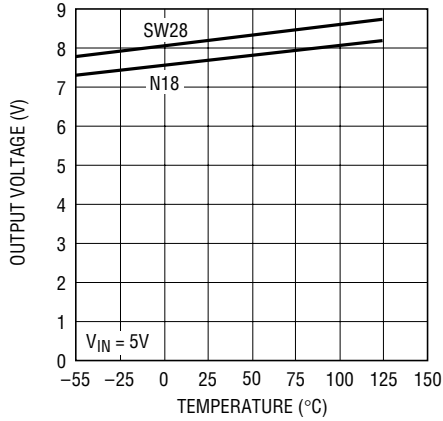


LTC1177-5
Input Current vs Temperature

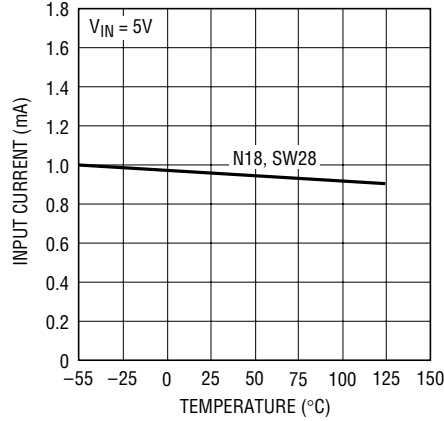


LTC1177-5
Output Voltage vs Input Voltage

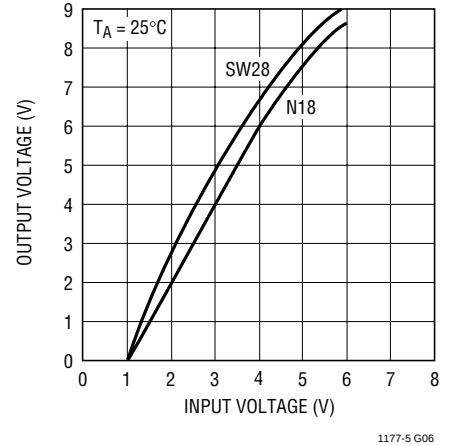


LTC1177-5
Input Current vs Input Voltage

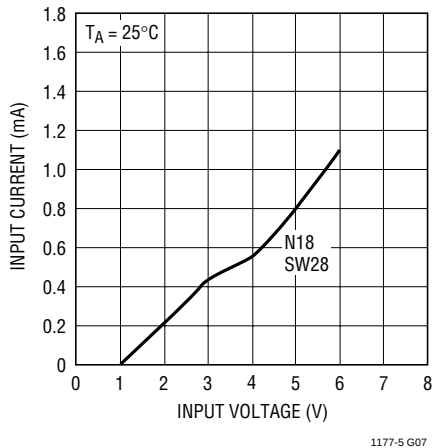


LTC1177-12 Turn-Off Time to $V_{OUT} = 1V$ vs Temperature

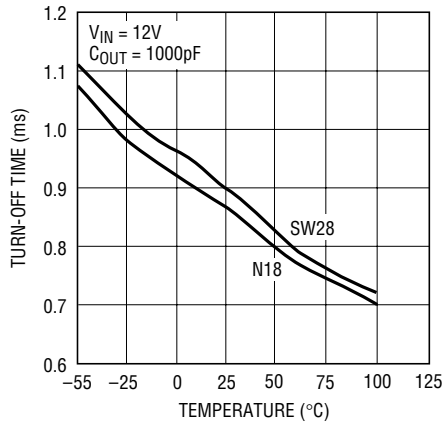


LTC1177-12 Turn-On Time to $V_{OUT} = 4.5V$ vs Temperature

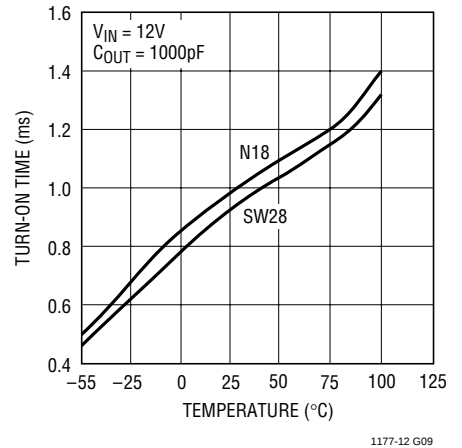


LTC1177-12
Turn-On Time to $V_{OUT} = 4.5V$ vs Output Capacitance

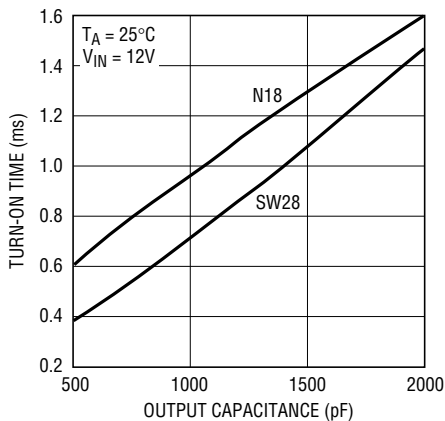





LTC1177-12
Turn-Off Time to $V_{OUT} = 1V$ vs Output Capacitance

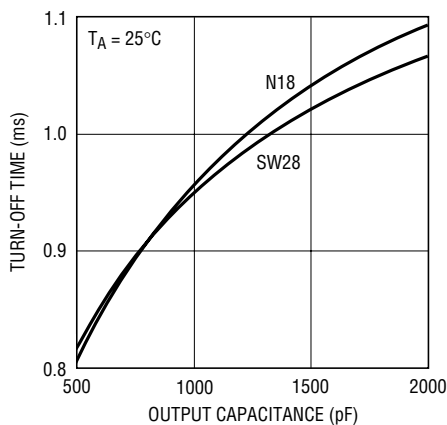

LTC1177-12
Output Current vs Output Voltage

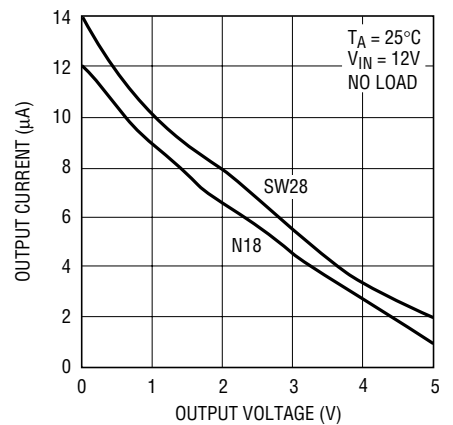

TYPICAL PERFORMANCE CHARACTERISTICS

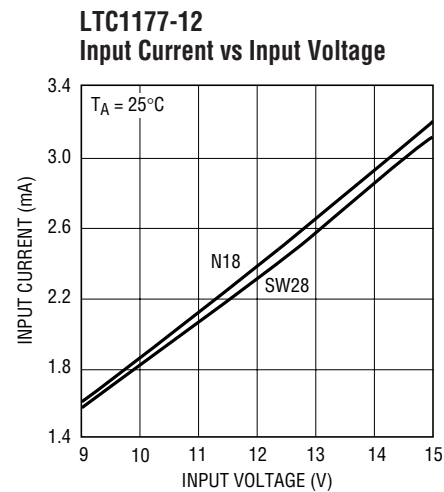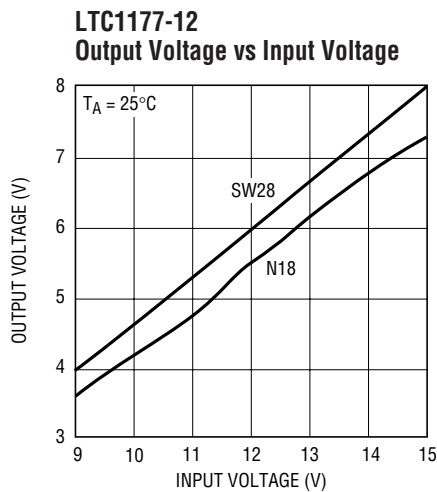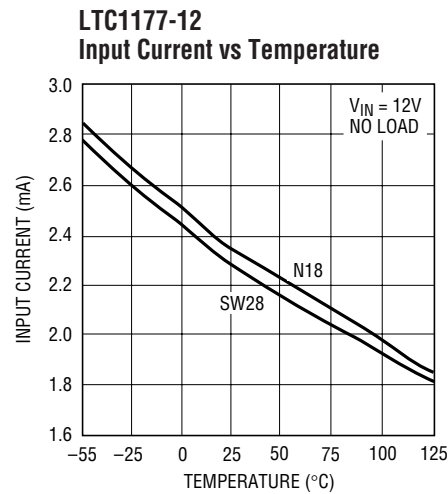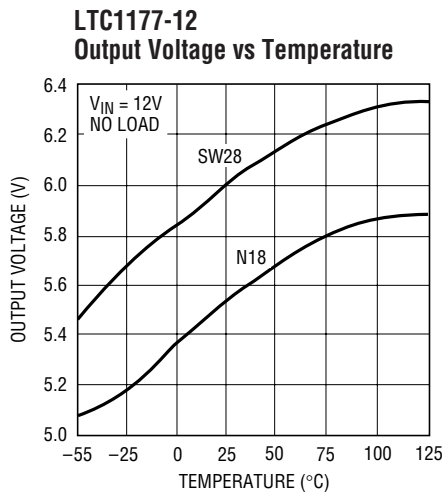

PIN FUNCTIONS

V_{IN} : Voltage Input, $5.25V \geq V_{IN} \geq 4.75V$ (LTC1177-5) and $12.6V \geq V_{IN} \geq 11.4V$ (LTC1177-12). Connect a $0.01\mu F$ capacitor between V_{IN} and GND1 when the source impedance is high or the V_{IN} connection is long.


OUT: Output Voltage. The output voltage level is 8V (typ) for SW package and 7.5V (typ) for N package (LTC1177-5) with 5V at V_{IN} pin; 5.7V (typ) for SW package and 5.2V (typ) for N package (LTC1177-12) with 12V at V_{IN} pin. This pin is to drive the gate of the external N-channel MOSFET.

SENSE: Current Limit Sense Input. Connecting a 1Ω resistor from the Sense pin to GND2 limits the current through the power MOSFET to 620mA (typ). $I_{LIM} = 620mV/R_{SENSE}$.


GND2: Floating Ground Connects to the source of the external N-channel MOSFET.

GND1: Input Ground. The ground connection of the input control signal.

BLOCK DIAGRAM

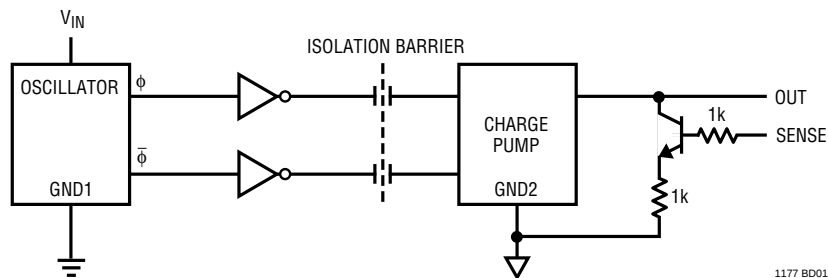


SWITCHING WAVEFORMS

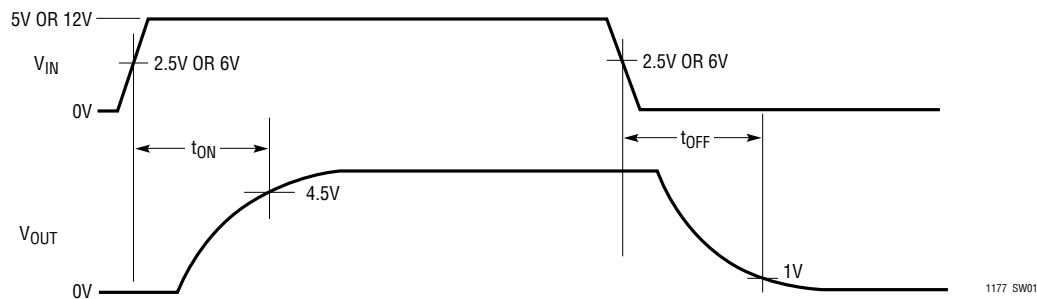


TYPICAL APPLICATIONS

Solid State Relay

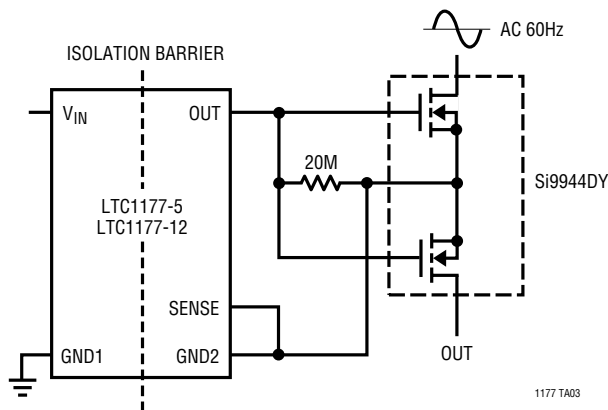


Isolated High Side Switch with Fold-Back Current Limit

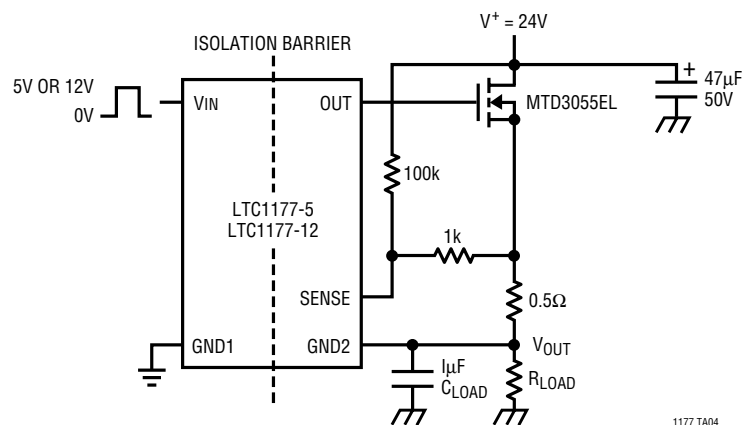


PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

N Package
18-Lead PDIP Isolation Barrier (Narrow 0.300)
(LTC DWG # 05-08-1590)

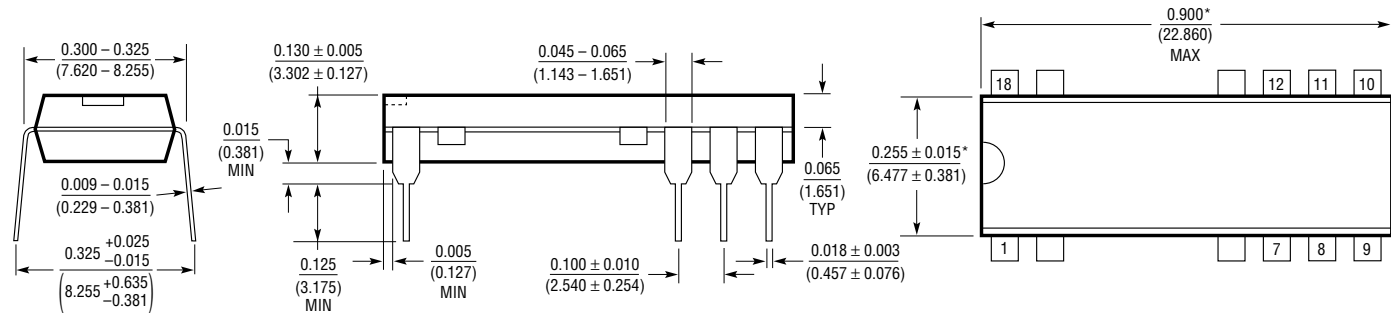

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

SW Package
28-Lead Plastic Small Outline Isolation Barrier (Wide 0.300)
(LTC DWG # 05-08-1690)

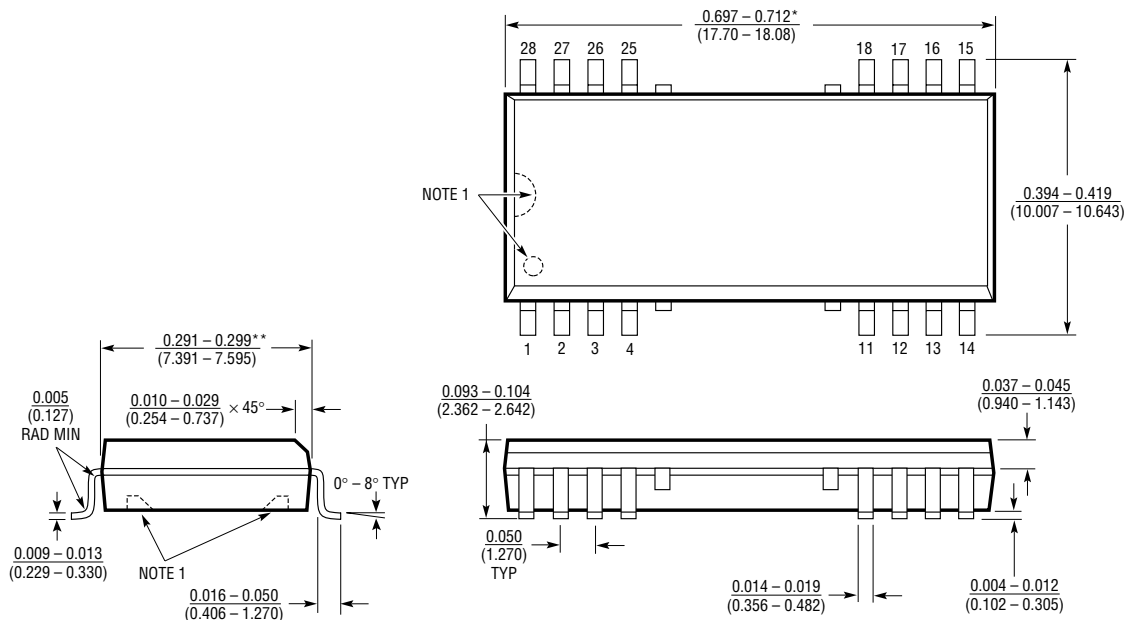

NOTE:
1. PIN 1 IDENT, NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS
THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS.
*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE
**DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC1145/LTC1146	Low Power Digital Isolator	Passes Digital Information Across Isolation Barrier
LT®1158	Half-Bridge N-Channel Power MOSFET Driver	Useful for Motor Speed Control, Synchronous Switching Regulator
LTC1255	Dual 24V High Side MOSFET Driver	User Set Current Limiting



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.