


# IB IL 24 DI8/HD-XC-PAC

**Inline digital input terminal,  
version for extreme conditions,  
8 inputs, 24 V DC**

Data sheet  
8461\_en\_00

© PHOENIX CONTACT 2012-05-29

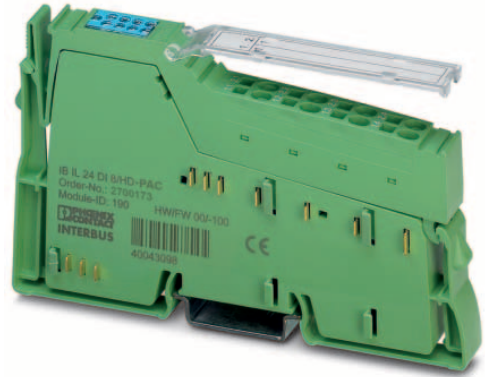

## 1 Description

The terminal block has been developed for use in an Inline station. It is used to acquire digital signals.

Thanks to special engineering measures and tests, the terminal can be used under extreme ambient conditions.

### Features

- Connections for eight digital sensors
- Connection of sensors in 1-wire technology
- Diagnostic and status indicators
- Can be used under extreme ambient conditions
- Painted PCBs
- Extended temperature range T2 (-40°C ... +55°C)



This data sheet is only valid in association with the IL SYS INST UM E user manual.



Make sure you always use the latest documentation.  
It can be downloaded from the product at [www.phoenixcontact.net/catalog](http://www.phoenixcontact.net/catalog).

---


<b>2</b>	<b>Table of contents</b>	
1	Description .....	1
2	Table of contents .....	2
3	Ordering data .....	3
4	Technical data .....	3
5	Additional tables .....	5
6	Tested successfully: Use under extreme ambient conditions .....	6
7	Internal circuit diagram .....	6
8	Local status and diagnostic indicators .....	7
9	Terminal point assignment.....	7
10	Connection notes and examples .....	7
11	Process data.....	7

### 3 Ordering data

Description	Type	Order No.	Pcs. / Pkt.
Inline digital input terminal, version for extreme conditions, complete with accessories (connector plug and labeling field), 8 inputs, 24 V DC, 1-wire connection technology	IB IL 24 DI8/HD-XC-PAC	2701212	1
Accessories	Type	Order No.	Pcs. / Pkt.
Connector, for digital 1, 2 or 8-channel Inline terminals ( Plug/Adapter )	IB IL SCN-8	2726337	10
Labeling field, width: 12.2 mm ( Marking )	IB IL FIELD 2	2727501	10
Documentation	Type	Order No.	Pcs. / Pkt.
User manual, English, Automation terminals of the Inline product range	IL SYS INST UM E	-	-
Data sheet, English, INTERBUS addressing	DB GB IBS SYS ADDRESS	-	-

### 4 Technical data

#### Dimensions (nominal sizes in mm)

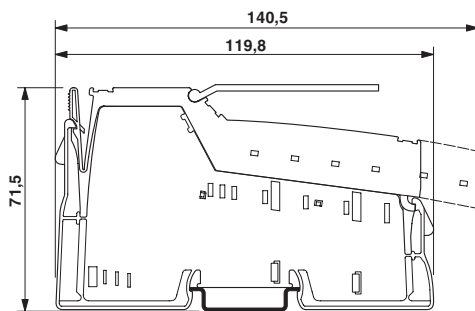

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

#### General data

Color	green
Weight	60 g ( With connector )
Operating mode	Process data mode with one byte
Ambient temperature (operation)	-40 °C ... 55 °C (See also the "Tested successfully: Use under extreme ambient conditions" section of the data sheet.)
Ambient temperature (operation)	-40 °C ... 60 °C (At U <sub>S</sub> < 24.5 V; see also the "Tested successfully: Use under extreme ambient conditions" section of the data sheet.)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Temperature class	T2 (-40°C ... 55°C, EN 50155)
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)

**General data**

Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

**Connection data**

Name	Inline connectors
Connection method	Spring-cage connection
Conductor cross section solid / stranded	0.08 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section [AWG]	28 ... 16

**Interface Inline local bus**

Connection method	Inline data jumper
Transmission speed	500 kBit/s

**Power consumption**

Segment supply voltage $U_S$	24 V DC (nominal value)
Current consumption from $U_S$	max. 5.5 mA DC
Communications power $U_L$	7.5 V DC
Current consumption from $U_L$	max. 30 mA DC
Power loss	max. 0.72 W

**Digital inputs**

Number of inputs	8
Connection method	Spring-cage connection
Connection method	1-wire
Description of the input	EN 61131-2 types 1 and 3
Nominal input voltage	24 V DC
Nominal input current	Typ. 2.4 mA
Input voltage range "0" signal	-3 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Delay at signal change from 0 to 1	1 ms
Delay at signal change from 1 to 0	1 ms
Permissible conductor length to the sensor	30 m

**Programming Data**

ID code (hex)	BE
ID code (dec.)	190
Length code (hex)	81
Length code (dec.)	129
Process data channel	8 Bit
Input address area	1 Byte
Output address area	0 Byte
Parameter channel (PCP)	0 Byte
Register length (bus)	8 Bit



For the programming data/configuration data of other bus systems, please refer to the corresponding electronic device data sheet (e.g., GSD, EDS).

**PROFIBUS telegram data**

Required parameter data	1 Byte
Need for configuration data	4 Byte

**Error messages to the higher level control or computer system**

None

**Electrical isolation/isolation of the voltage areas**

5 V supply, incoming remote bus/7.5 V supply (bus logics)	500 V AC , 50 Hz , 1 min
5 V supply, outgoing remote bus/7.5 V supply (bus logics)	500 V AC , 50 Hz , 1 min
7.5 V supply (bus logics)/24 V supply (I/O)	500 V AC , 50 Hz , 1 min
24 V supply (I/O) / functional earth ground	500 V AC , 50 Hz , 1 min



To achieve electrical isolation between the logic level and the I/O area, supply these areas from separate power supply units. Interconnection of the power supply units in the 24 V area is not permitted (see also user manual).

**Approvals**

For the latest approvals, please visit [www.phoenixcontact.net/catalog](http://www.phoenixcontact.net/catalog).

**5 Additional tables****Input characteristic curve**

Input voltage U [V]	Typical input current I [mA]
$-30 < U \leq 0.7$	0
3	0.12
6	1.32
9	2.32
12	2.36
15	2.36
18	2.36
21	2.36
24	2.40
27	2.40
30	2.40

## 6 Tested successfully: Use under extreme ambient conditions

The terminal has been tested successfully over 250 temperature change cycles in accordance with IEC 61131-2 in the range from -40°C to +70°C.

The following conditions were observed:

- The Inline devices for all connecting cables were connected with a minimum conductor cross section of 0.5 mm<sup>2</sup>
- The Inline station was assembled on a wall-mounted horizontal DIN rail
- Fans were used to ensure continuous movement of air in the control cabinet
- The Inline station was not exposed to vibration or shock
- The Inline station was operated with a maximum of 24.5 V (ensured by using regulated power supply units)

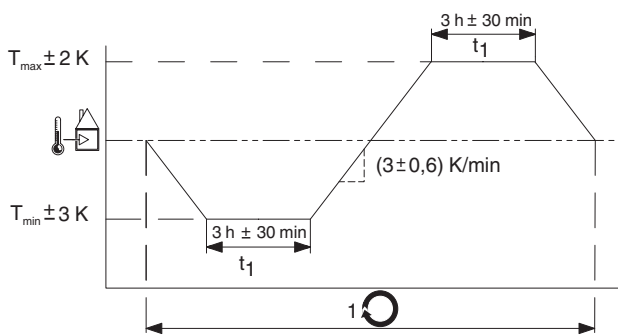


Figure 1 Temperature change cycle



Temperature in the control cabinet/ambient temperature



Cycle



**WARNING:**

The terminal is not approved for use in potentially explosive areas.

The terminal is not approved for use in safety technology.

## 7 Internal circuit diagram

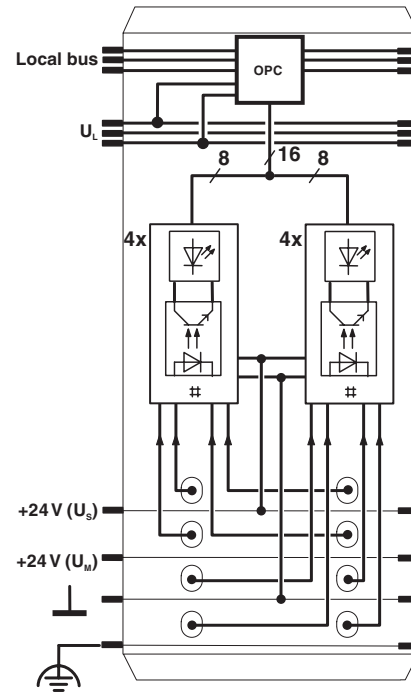



Figure 2 Internal wiring of the terminal points



Protocol chip (Bus logic including voltage conditioning)



LED (status indicator)



Optocoupler



Digital input



Explanation for other used symbols has been provided in the IL SYS INST UM E user manual.

## 8 Local status and diagnostic indicators



Figure 3 Local status and diagnostic indicators

Designation	Color	Meaning
D	Green	Diagnostics (bus and logic voltage)
1 to 8	Yellow	Status of the inputs

### Function identification

Light blue

## 9 Terminal point assignment

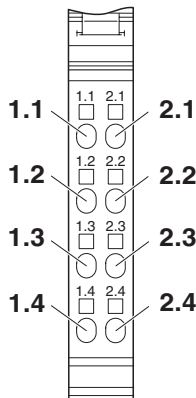


Figure 4 Terminal point assignment

Terminal point	Assignment
1.1 / 2.1	Signal input (IN 1 / IN 2)
1.2 / 2.2	Signal input (IN 3 / IN 4)
1.3 / 2.3	Signal input (IN 5 / IN 6)
1.4 / 2.4	Signal input (IN 7 / IN 8)

## 10 Connection notes and examples



### NOTE: Malfunction

Make sure that the supply voltage  $U_S$  is available, as it is used internally as the auxiliary voltage.



When connecting the sensors observe the assignment of the terminal points to the process data.



### NOTE: Malfunction

The sensors and  $U_S$  must be supplied from the same voltage supply.

If you connect the sensors via external busbars, make sure that the sensors and  $U_S$  are supplied by the same power supply.

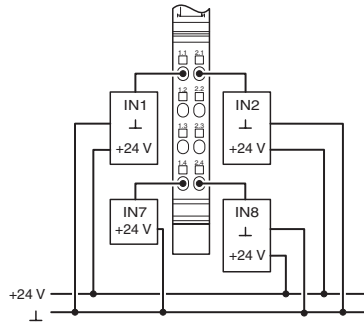


Figure 5 Example of a connection of sensors when using external busbars

## 11 Process data

### Assignment of the terminal points to IN process data

(Byte.Bit) view	Byte	Byte 0							
	Bit	7	6	5	4	3	2	1	0
Assignment	Terminal point (signal)	2.4	1.4	2.3	1.3	2.2	1.2	2.1	1.1
Status indicator	LED	8	7	6	5	4	3	2	1



For the assignment of the illustrated (byte.bit) view to your INTERBUS control or computer system, please refer to the DB GB IBS SYS ADDRESS data sheet.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.