
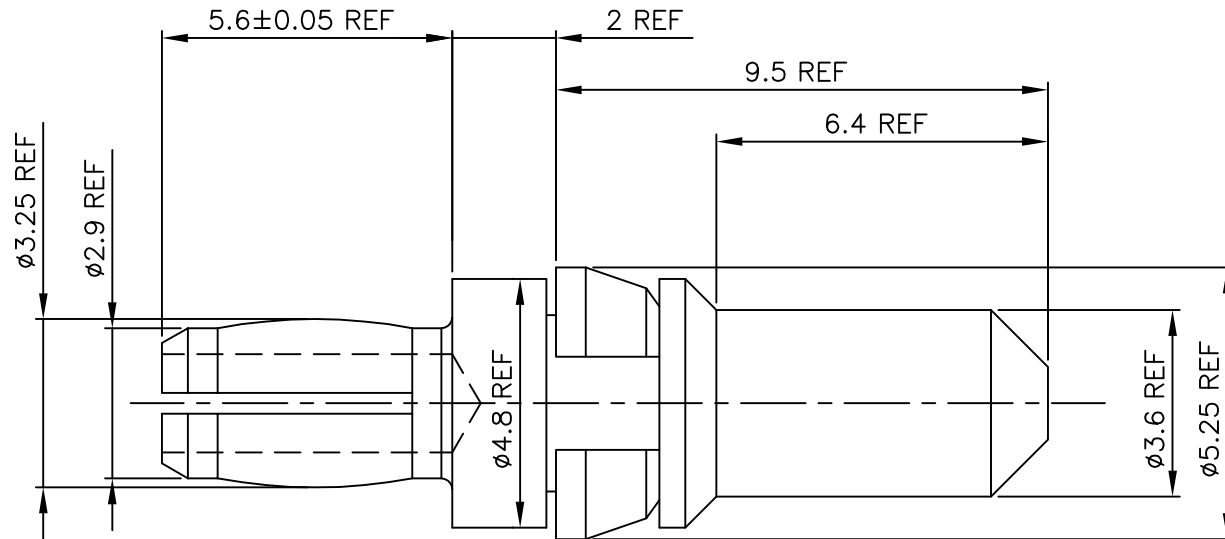


PRODUCT NUMBER
85977-001LF
85977-020LF SEE SHEET 2
85977-030LF SEE SHEET 3
85977-040LF SEE SHEET 4

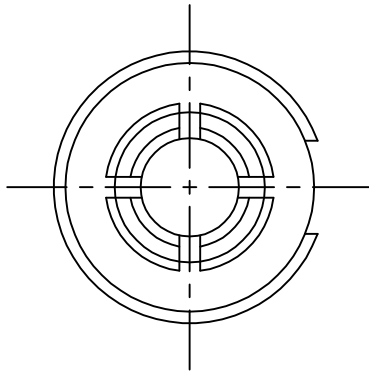

PCB HOLE SPECIFICATION:

DRILLED HOLE: 3.15±0.025

COPPER PLATING: 0.040 MIN.

TIN PLATING: 0.005 - 0.015



FINISHED HOLE: 3.00 +0.04/-0.06

NOTES:

- DIM. ACC. DIN 41626.
- THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS -22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE TO 30 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6 mm MINIMUM THICK PCB

mat'l. code ---				tolerances unless otherwise specified				CUSTOMER COPY		 ELECTRONICS www.fciconnect.com			
ltr	ecn no	dr	date	linear						title DIN POWER HDR STR PF INSERT			
A	H60560	MME	960929										
B	H70234	RMA	970404										
C	H80867	DDB	981214	angles				scale 10:1		A3	product familyMETRAL (tm) code size dwg no 85977		
D	H90292	HME	990420	enr	D. de Bil	960606							
E	pg05-0406	CLU	051021	engr	P. Schalk	960606							
F	F11-0308	APA	110922	chr	P. Schalk	960606							
				appd	H. Cooijmans	960606							
sheet index	revision sheet	E	E	E	E								
		2	3	4									

PRODUCT NUMBER
85977-020LF

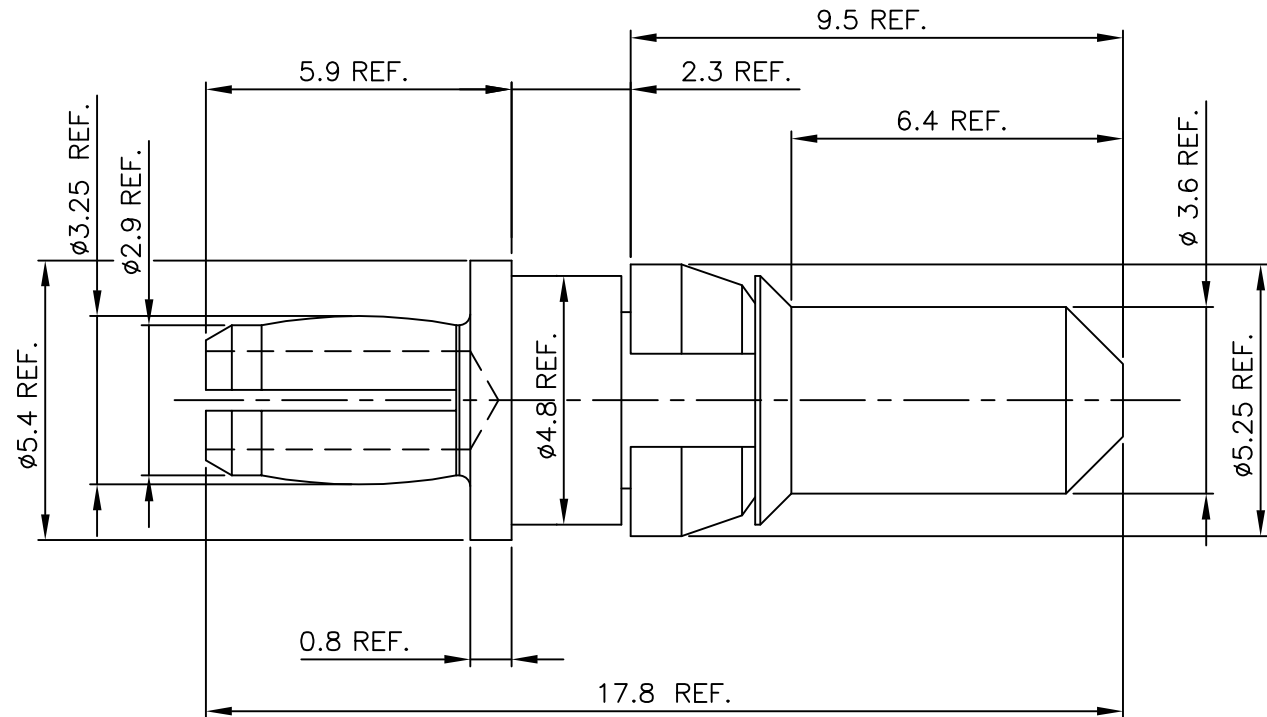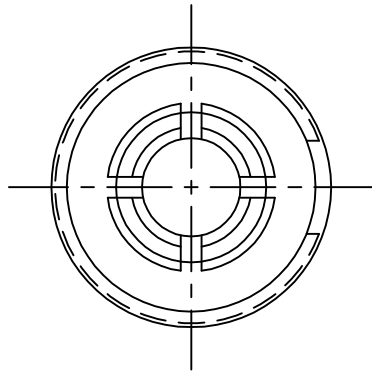

NOTES:

- DIM. ACC. DIN 41626.
- THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS -22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE TO 30 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6 mm MINIMUM THICK PCB

PCB HOLE SPECIFICATION:

DRILLED HOLE: 3.15 ± 0.025



COPPER PLATING: 0.040 MIN.

TIN PLATING: 0.005 - 0.015

FINISHED HOLE: $3.00 +0.04/-0.06$

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
ltr	ecr	no	dr	date	linear	projection	title	FCI	www.fciconnect.com
F					angles		DIN POWER HDR STR PF INSERT		
					dr	R. MATHIJSEN 970404	product	family	code
					enr	P. Schalk 970404	size	dwg no	213
					chr	P. Schalk 970404	scale	85977	sheet
					app	P. Schalk 970404	10:1		2 of -
sheet index	revision	sheet							

PRODUCT NUMBER
 85977-030LF

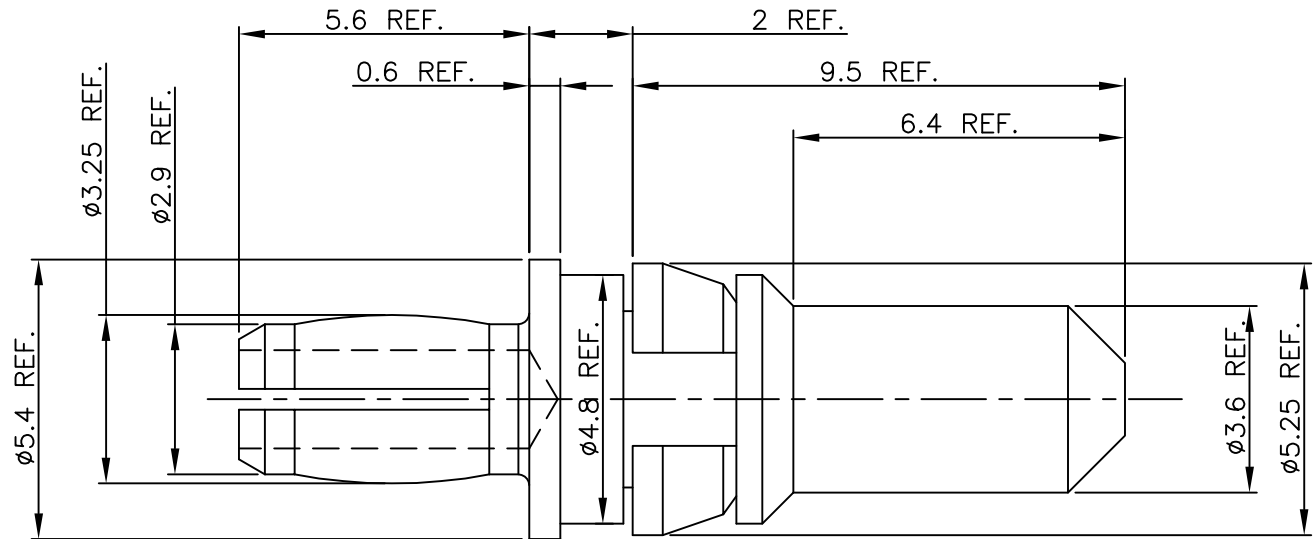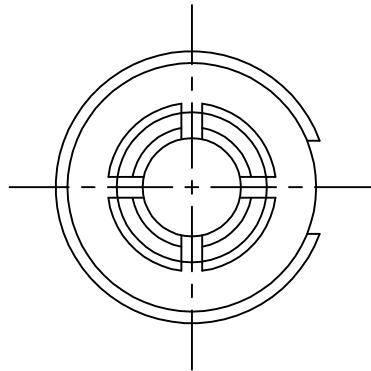

NOTES:

1. DIM. ACC. DIN 41626.
2. THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS -22-008.
3. THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE TO 30 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6 mm MINIMUM THICK PCB

PCB HOLE SPECIFICATION:




DRILLED HOLE: 3.15 ± 0.025

COPPER PLATING: 0.040 MIN.

TIN PLATING: 0.005 - 0.015


FINISHED HOLE: $3.00 +0.04/-0.06$

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
ltr	ecr	no	dr	date	linear	projection	mm	title	www.fciconnect.com
F					angles			DIN POWER HDR	
					dr	D. de Bil	981214	STR PF INSERT	
					enr	M. Loman	981214	product famil	METRAL (tm)
					chr	M. Loman	981214	code	213
					app	M. Loman	981214	scale	10:1
sheet	revision							size	dwg no
index	sheet							A3	85977
								sheet	3 of -

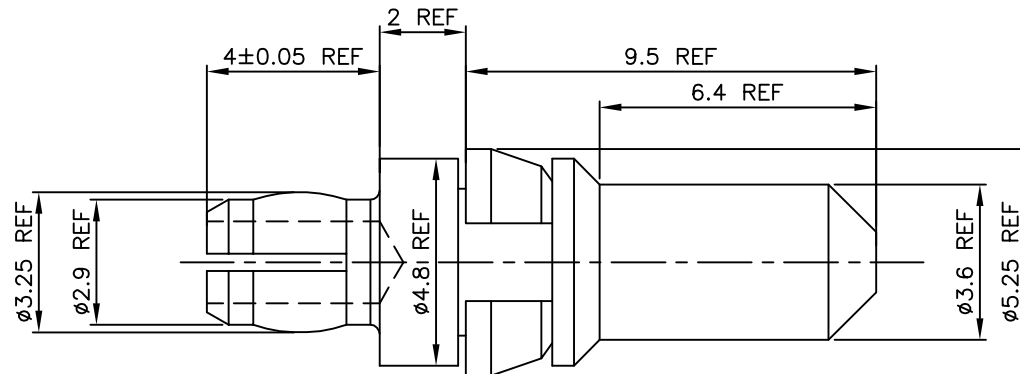

PRODUCT NUMBER
85977-040LF

WITH METAL CLIP

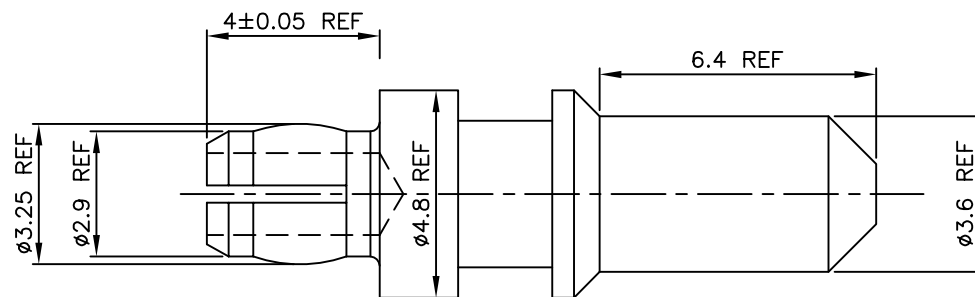

PRODUCT NUMBER
85977-040CLF

WITHOUT METAL CLIP

NOTES:

1. DIM. ACC. DIN 41626.
2. THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS -22-008.
3. THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE TO 30 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6 mm MINIMUM THICK PCB

PCB HOLE SPECIFICATION:

DRILLED HOLE: 3.15±0.025

COPPER PLATING: 0.040 MIN.

TIN PLATING: 0.005 - 0.015

FINISHED HOLE: 3.00 +0.04/-0.06

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		FCI ELECTRONICS	
ltr	ecr	no	dr	date	linear		projection		title	DIN POWER HDR
F					angles				STR PF 4mm TAIL	
					dr	D. de Bil	990302	mm	product fam	METRAL (tm)
					enr	M. Loman	990302	scale	size dwg no	213
					chr	M. Loman	990302	10:1	85977	sheet
					app	H. Cooijmans	990302			4 of -
sheet index	revision	sheet								



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.