



Features

- 3.3" x 6.2" x 1.62" Package
- Up to 425W of Air-Cooled Power, 300W Convection
- Universal Input 90-264Vac Input Range
- 5V at 2A Standby Output
- 12V Fan Output
- Inhibit, Power Fail, DC OK Signals, Remote Sense
- Approved to CSA/EN/IEC/UL60601-1, 3rd Edition 2 MOPP Isolation
- Meets EN61000-4-2, EN61000-4-3 and EN61000-4-6 Requirements for Home Healthcare Applications
- Efficiency 88% typical
- 3-Year Warranty
- RoHS Compliant



Description

The MU425 family is designed to power the latest professional healthcare devices. All models meet 2 MOPP input-to-output isolation. Models are available with main output voltages of 12V, 18V, 24V and 48V.

Model Selection

| Model Number | Volts | Output Current | | Ripple & Noise ³ (mV pk-pk) | Total Regulation | Efficiency ⁴ (Main Output) | OVP Threshold |
|--------------|----------------------|---------------------------|-------------------------|---|-------------------|--|---------------|
| | | w/200LFM air ¹ | Convection ² | | | | |
| MU425S12E | 12V | 32.2A | 22.0A | 120mV | ±3% | 88% | 14.0 ± 1.1V |
| | 5Vsb | 2.0A | 2.0A | 100mV | ±5% | | 5.5V – 8.0V |
| | 12V Fan ⁶ | 1.0A | 0.5A | 360mV | ±10% ⁵ | | N/A |
| MU425S18E | 18V | 21.45A | 14.6A | 180mV | ±3% | 88% | 21.0 ± 2.0V |
| | 5Vsb | 2.0A | 2.0A | 100mV | ±5% | | 5.5V – 8.0V |
| | 12V Fan ⁶ | 1.0A | 0.5A | 360mV | ±10% ⁵ | | N/A |
| MU425S24E | 24V | 16.8A | 11.9A | 240mV | ±3% | 90% | 28.0 ± 2.5V |
| | 5Vsb | 2.0A | 2.0A | 100mV | ±5% | | 5.5V – 8.0V |
| | 12V Fan ⁶ | 1.0A | 0.5A | 360mV | ±10% ⁵ | | N/A |
| MU425S48E | 48V | 8.4A | 5.9A | 480mV | ±3% | 90% | 58.0 ± 2.0V |
| | 5Vsb | 2.0A | 2.0A | 100mV | ±5% | | 5.5V – 8.0V |
| | 12V Fan ⁶ | 1.0A | 0.5A | 360mV | ±10% ⁵ | | N/A |

- Notes:**
1. Total power with 200 lfm of forced air cooling is 425W (408W for 18V, 385W for 12V) including 12V/1A for Fan output and 5V/2A standby.
 2. Total convection power is 300W (280W for 12V model). Total power includes 5Vsb and Fan outputs.
 3. Measured at 25°C ambient with noise probe directly at end of 6" twisted pair terminated with 0.1µF ceramic and 10µF low ESR capacitors. Values will be higher at ambient temperatures below 0°C.
 4. Efficiency values listed are typical and are measured at 115Vac input, full load output current, at an ambient temperature of 25°C.
 5. Fan output regulation is with 1A min load on main output.
 6. Fan Output: If the load on the output is other than a fan, a short circuit condition on the output can only be remedied by removing both the cause of the short circuit and the load. This will allow the output to resume normal operation.

General Specifications

| | | | |
|-----------------------|---|-----------------------------------|---|
| AC Input | 100-240Vac, ±10%, 47-63Hz, 1Ø 120-300Vdc (external fuse required for DC input) | Turn On Time (Main Output) | Main output: <1 sec. max @115Vac, rise time 30mS max. 5Vsb turn-on time is 500mS max., rise time 50mS max. Output Voltage rise is monotonic. |
| Input Current | 115Vac: 5.2A, 230Vac: 2.5A | Hold-up Time | Main Output: >20ms for 300W @ 120Vac/60 Hz, >16ms for 367W (90% of 408W) @ 120v/60Hz. 5Vsb Output: >500mS |
| Inrush Current | 264Vac, cold start: will not exceed 40Arms within ½ cycle. I ² T = 25A ² /Sec maximum | Overtemperature Protection | Sensing transformer temperature, 135°C (55°C ambient temperature at full load), auto recovery. |
| Input Fuses | F1, F2: 6.3A, 250Vac | Overload Protection | 130 to 170% of rating, Hiccup Mode, auto-recovery. |
| Efficiency | See chart above. | Switching Frequency | 75kHz, typical |

General Specifications (continued)

| | | | |
|---------------------------|--|---------------------------------|--|
| Leakage Current | Earth: <750µA@264Vac, 60Hz, NC <1.5mA@264Vac, SFC Touch: <100uA @264Vac, NC <500uA @264Vac, SFC | Short Circuit Protection | <u>Main Output & 5Vsb</u> : Cycling type, auto recovery. <u>Fan Output</u> : Recovery only after removal of short and load. See note 5 above. |
| Power Factor | >0.99 @ 115Vac, Full Load >0.95 @ 230Vac, Full Load | Oversvoltage Protection | OVP latch, see chart for trip ranges. 5V standby output (latch), see chart for trip range. |
| Output Power | 425W continuous (24V model), with 200 lfm airflow. 408W for 18V, 385W for 12V models. 300W convection cooled (280W for 12V model) | Isolation | Input-Output: 2 MOPP Input-Ground: 1 MOPP Output-Ground: 1500Vdc |
| Transient Response | 50% load step, $\Delta i/\Delta t$: <0.2A/µS. Max Voltage Deviation = 5%. Recover to within 1% of nominal within 500µS | Operating Temperature | -10 to 70°C. Starts up- 40°C. The unit will meet all published specifications after a warm-up period |
| Ripple and Noise | 0.5%rms, 1% pk-pk, see chart on page 1. | Temperature Derating | Derate output power linearly above 50°C to 50% at 70°C |
| Common Mode Noise | <u>Line Frequency</u> : <2.5Vrms @115Vac, <5Vrms@230Vac, 50/60Hz. For high frequency noise and/or test set-up information, consult SL Power. | Storage Temperature | -40°C to +85°C |
| Output Voltage | See chart on page 1. Initial setpoint within 0.5% of nominal. Adjustable +/-5% from nominal. | Altitude | Operating: up to 5000m (derating may be required above 3000m, consult factory) Non-operating: -500 to 40,000 ft. |
| Minimum Load | Not required for main output or 5Vsb. 12V Fan output requires minimum load of 0.5A on main output in order to be within its regulation band | Relative Humidity | 5% to 95%, non-condensing |
| Total Regulation | See chart on page 1. | Shock | Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total. Non-Operating: Half-sine, 40 gpk, 10 ms, 3 axes, 6 shocks total |
| Vibration | Operating: 0.003g/Hz, 1.5grms overall, 3 axes, 10 min/axis. Non-Operating: 0.026g ² /Hz, 5.0grms overall, 3 axes, 1 hr/axis | Safety Standards | EN/CSA/UL/IEC 60601-1, 3 rd Edition |
| Dimensions | W: 3.3" x L: 6.2" x H: 1.62" W: 84mm x L: 157.5mm x H: 41mm | MTBF | 356,330 hours, per Telcordia 332, Issue 6, 25°C, full rated load (w/airflow) at 110Vac input. |
| Weight | 670g | E-Cap Life | 7 years, based on typical operation of 12 hours/day, 261 days/year at 40°C ambient temp. |

Auxiliary Signals

| | | | |
|--------------------------------|---|--------------------|---|
| Power Good/ Power Fail: | Signal is HIGH within 500mS after the main output is within regulation band upon AC turn on. Goes LOW within 4mS min. before the main DC output drops to <90% of nominal when AC turns off. | DC OK: | Goes HIGH when main DC output is above 90% of nominal voltage and goes LOW when the output is below 90% of rated main output DC voltage |
| 5V Standby Output: | 5V @ 2A, +/-5% regulation over all changes in main output load current. | Fan Output: | 12V@1A (air cooled) or 0.5A (convection), +/-10% regulation for load change of 0.5A to FL on the main output. |
| Remote Sense: | Compensates for up to 0.16V voltage drop. Max. deviation of 5% (main output) any 50% step above 5% load | Inhibit: | Logic HIGH or open = ON Logic LOW or short to ground = OFF |


Connector Information

| Input Connector J101 | | Main DC Output J302, J303 | Fan Output J301 | Signal Connector J401 | | |
|---|----------------|--|--|--|-----------------------|---------------------|
| PIN 1) FG | PIN 4) NC | Term 1 – J302: (+V) | PIN 1) 12V Fan (+) | PIN 1) Remote Sense (+) | PIN 5) Remote Inhibit | PIN 8) +5Vsb Output |
| PIN 2) NC | PIN 5) AC Line | Term 2 – J303: (-V) | PIN 2) 12V Fan (-) | PIN 2) Common | PIN 6) Power Good | PIN 9) DC OK |
| PIN 3) AC Neutral | | | | PIN 3) Remote Sense (-) | PIN 7) +5Vsb Output | PIN 10) Common |
| | | | | PIN 4) NC | | |
| <u>Mating Connector:</u> Tyco/AMP 640250-5 Pins: 770476-1 | | <u>Mating Connector:</u> Molex 19141-0058 19141-0063 19141-0083 | <u>Mating Connector:</u> Tyco AMP 1375820-2 Pins: 1375819 | <u>Mating Connector:</u> Molex 90142-0010 Pins: 90119-2110 | | |

EMI/EMC Compliance

| | |
|---|---|
| Conducted Emissions | EN55011/CISPR22 Class B, FCC Part 15.107, Class B, 6db margin, typical. |
| Radiated Emissions | EN55022/CISPR22 Class A, FCC Part 15.109, Class A, 3db margin, typical. |
| Static Discharge Immunity | EN55024/IEC61000-4-2, Level 4, 8kV Contact Discharge, 15kV air discharge, Criteria A |
| Radiated RF Immunity | EN55022/IEC61000-4-3, Level 2, 10V/m, 80-2,700 MHz Criteria A |
| EFT/Burst Immunity | EN55024/IEC61000-4-4, Level 3, 2kV (PS Output), 1kV (signal outputs), Criteria A 100Khz |
| Line Surge Immunity | EN55024/IEC61000-4-5, Level 3, 1kV diff., 2kV common-mode, Criteria A |
| Conducted RF Immunity | EN55022/IEC61000-4-6, Level 3, 3Vrms,0.15-80Mhz and 6V@ISM frequency Criteria A |
| Power Frequency Magnetic Field Immunity | EN55024/IEC61000-4-8, Level 3, 30A/m, Criteria A |
| Voltage Dip Immunity | EN55024/IEC61000-4-11, Dips: 100%, 10mS, 8 phase angles ; 100%, 20ms; 30%, 500mS; Interruptions: 100%, 5000mS; Performance Criteria A, A (300W), A & B. |
| Line Harmonic Emissions | EN55024/IEC61000-3-2, Class A & D at full load |
| Flicker Test | EN55024/IEC61000-3-3, Section 5; 50Hz |

Mechanical Drawing

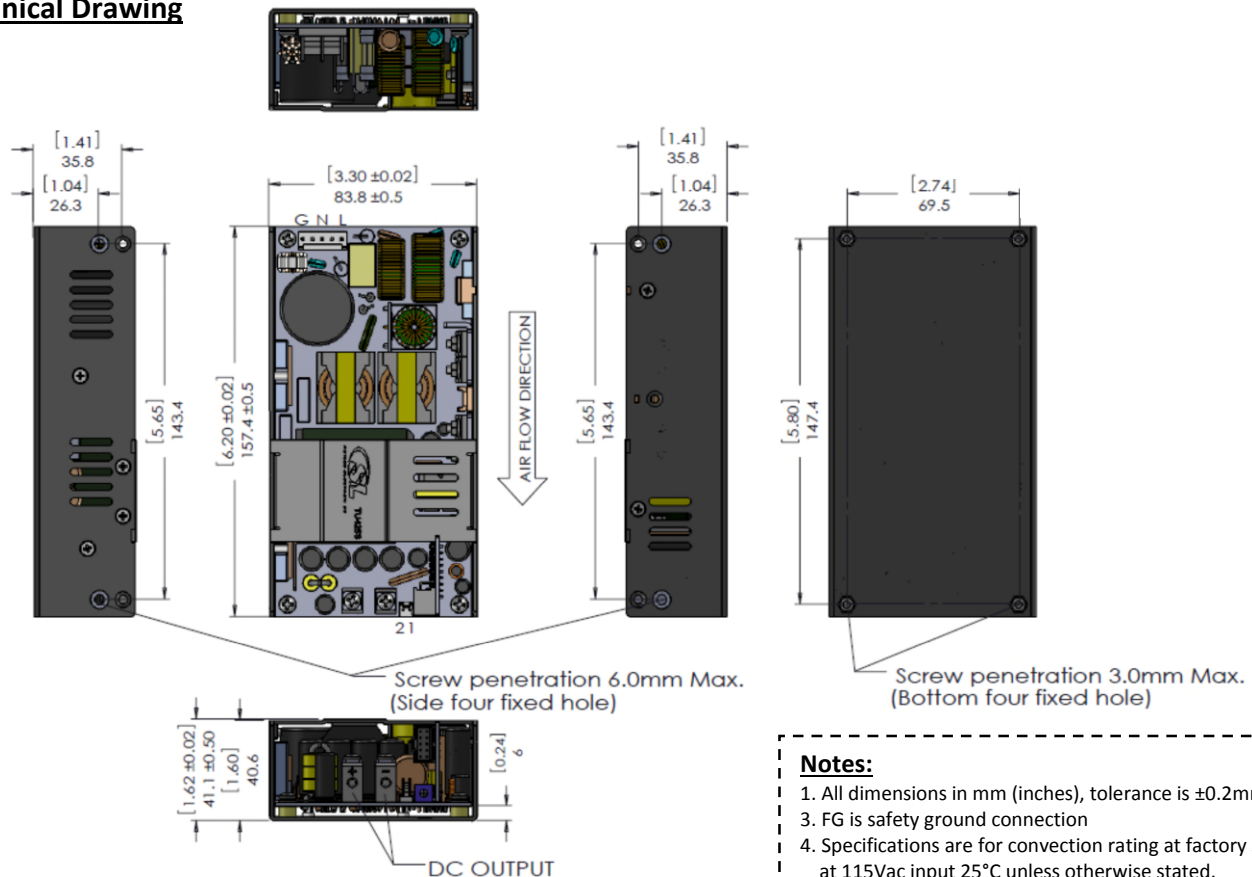



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.