ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

AC/DC SWITCHING DESKTOP ADAPTER
POWER SUPPLY WITH PFC
SINGLE OUTPUT / UNIVERSAL RANGE INPUT
200 WATTS
CEC V

DTE200-SX-F-W-C2 Series

Dimension: L188.5×W104.5×H60mm

CB CE CEC V

EPA POLLUTION PREVENTER

General Description

Input

Input Voltage Range:	90-264VAC
Frequency:	47-63Hz
Input Current(rms):	3A @ 115Vac, 60Hz;
Inrush current:	150A(max) at 230VAC cold start
Power Factor:	>0.9(115VAC100%Load)
Efficiency :	>85% @ full load, 115VAC

Features

1. High Reliability
2. 100% BURN-IN Tested
3. 100% Hi-Pot tested
4. Safety Approvals, EMC compliance
5. 40mm cooling fan
6. AC input: IEC 320-C14 Inlet
7. Two year warranty
8. Meet CEC & Energy Star level V requirements
9. Green functions+ No load power consumption <.5 W

Output Characteristic	Unit	Models						
		DTE200-12SX-F-W-C2	DTE200-16SX-F-W-C2	DTE200-19SX-F-W-C2	DTE200-20SX-F-W-C2	DTE200-24SX-F-W-C2	DTE200-36SX-F-W-C2	DTE200-48SX-F-W-C2
Output Voltage	Vdc	12	16	19	20	24	36	48
Output Current	A	16.66	12.5	10.53	10	8.33	5.56	4.17
Power	W	200						
O/P Regulation		±5%						
Ripple & Noise(max)*3	mVpp	240	300	300	300	300	300	300
Rise up time	mS	>16ms typical at full load @ 115VAC						

ETA USA
16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753
Visit us at: www.eta-usa.com
email at: sales@eta-usa.com

Environmental Specification	
Operating Temperature	0 to +50°C
Storage Temperature	-10 to +70°C
MTBF demonstrated	>140,000 hours at full load and 25 °C ambient temperature
Humidity	20%~90% non-condensing
Temperature coefficient	±0.05% / °C
Withstanding voltage	Primary-secondary: 4242VDC for 4sec Primary-frame ground: 2121VDC for 4sec
Insulation resistance	Primary-secondary: 20MΩ min. 500VDC Primary-frame ground: 20MΩ min. 500VDC
Environmental Agencies	
Safety Standards	CSA 22.2-No.60950-1 TUV EN60950-1 CB IEC 60950-1
EMC Standards	CISPR 22 Class B,FCC Class B,EN55022 Class B, CE
Protection	
Short circuit protection	Auto Recover once short circuit removed
Over Load Protection	Auto Recover. Overload range from 110%~160% max load.
Over Voltage Protection	Overvoltage range from 13.2~16VDC, latch off before reaching limit. Manual power reset necessary.
Mechanical	
Dimension [mm]: L188.5×W104.5×H60mm AC Input : IEC 320-C14	

Any overshoots during turn-on/ turn-off should be less than ±5% of the voltage regulation tolerance. No voltage of opposite polarity shall be present on any output during turn-on or turn-off.

ETA USA
16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753
Visit us at: www.eta-usa.com
email at: sales@eta-usa.com

DIMENSION DIAGRAM (mm)

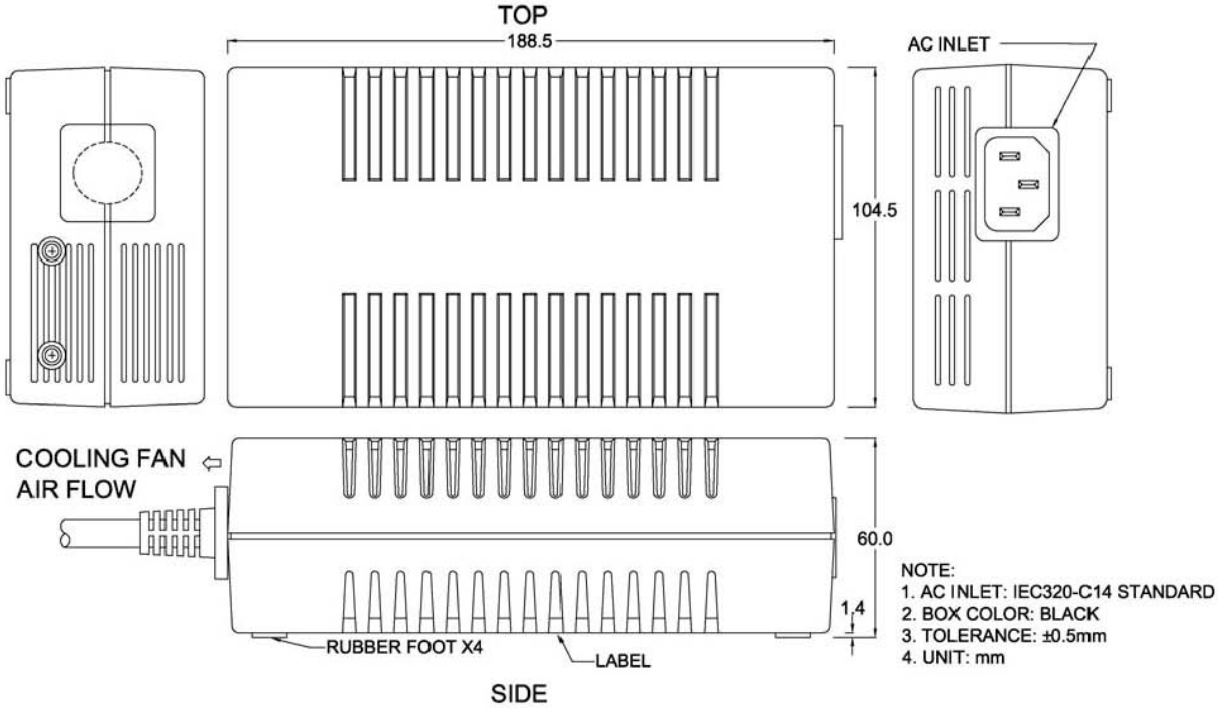

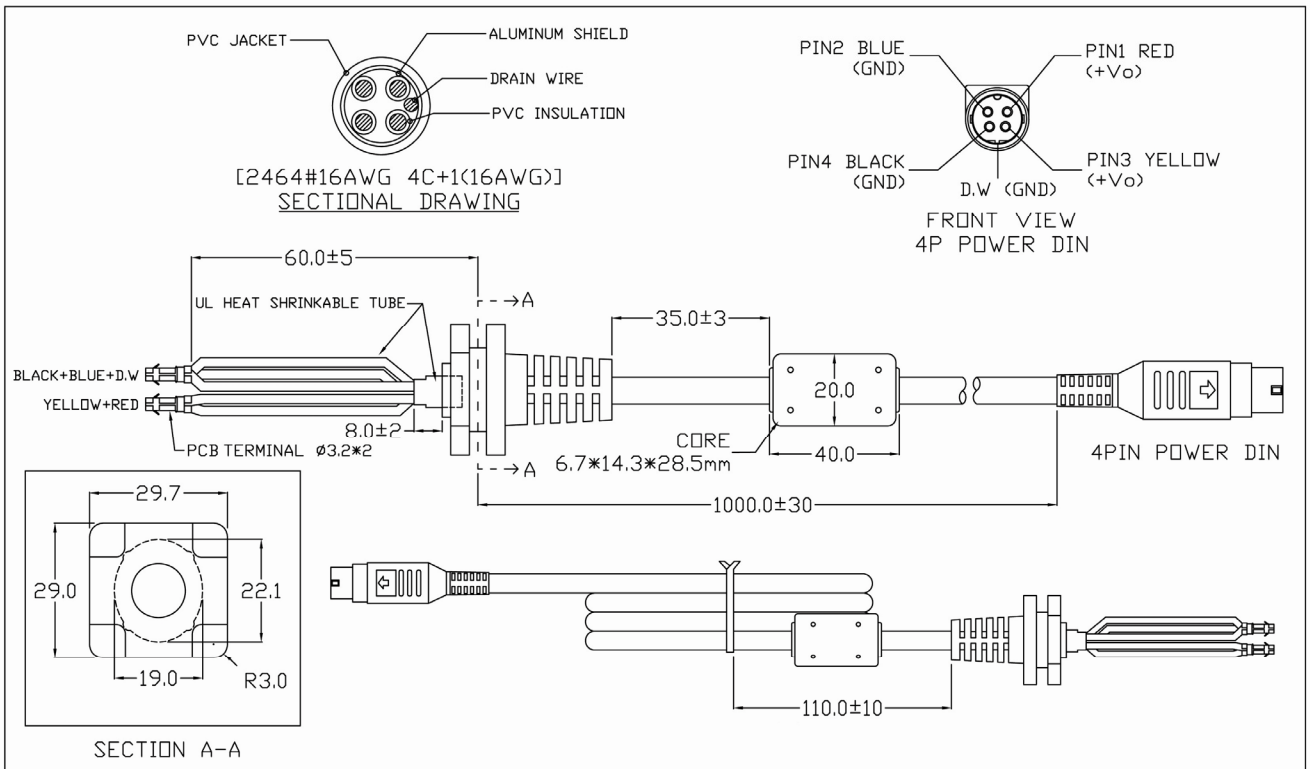

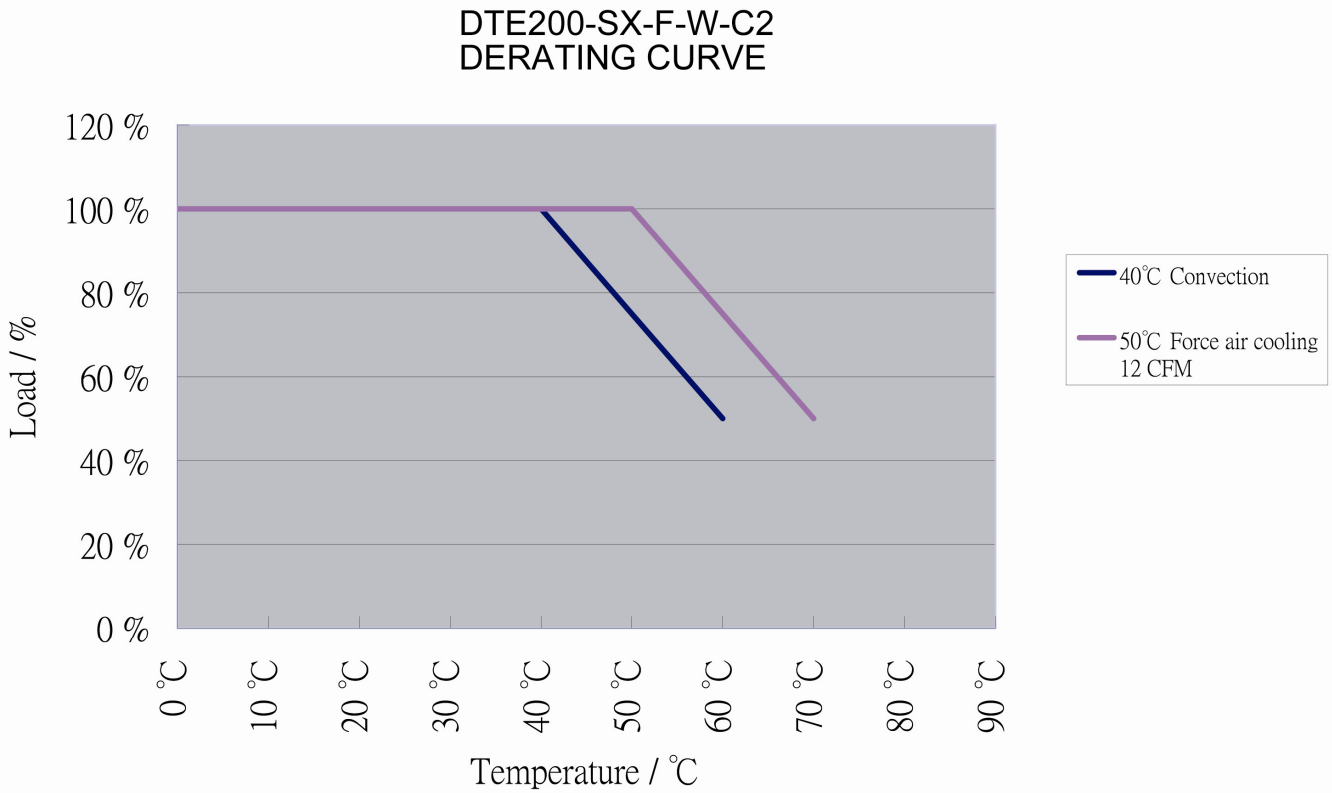

ETA USA
16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753
Visit us at: www.eta-usa.com
email at: sales@eta-usa.com

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.

Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.