SERIES 4501R 4501

RoHS Compliant

Traditional First Quality

Surface Mount Low-Profile Power Toroids

Power Inductors

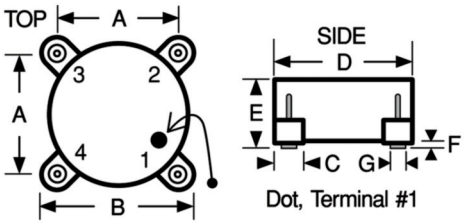



Actual Size

Test Methods Solderability per MIL-STD-202, Method 208. Inductance tested @ 10 kHz and zero Amps DC. Tested at 25°C.

Mechanical Configuration A flat top surface mount case with excellent coplanarity of terminals.

Physical Parameters

	Inches	Millimeters
A	0.285 ± 0.010	7.24 ± 0.25
B	0.360 ± 0.010	9.14 ± 0.25
C	0.060 ± 0.010	1.52 ± 0.25
D	0.350 ± 0.010	8.90 ± 0.25
E	0.200 ± 0.010	5.08 ± 0.25
F	0.025 ± 0.010	0.64 ± 0.25
G	0.040 (Ref.)	1.02 (Ref.)

Electrical Configuration Two inductors per unit; internal terminals: #1(start) – #2(finish) & #4(start) – #3 (finish).
Series Externally connect #2 to #4.
Parallel Externally connect #1 to # 4 and # 2 to # 3.

Operating Temperature Range –55°C to +125°C

Rated DC Current Based upon 20°C temperature rise from 25°C ambient.

Maximum Power Dissipation at 25°C 0.230 Watts

Inductance Tolerance Tolerance is specified by suffixing an alpha character to the part number as follows: K = 10%, L = 15%. M = 20%. Units are normally supplied to the tolerance indicated in the tables.

Marking Delevan; inductance and tolerance. A white dot indicates the location of pin 1. Note: RoHS component components will be marked with 4501R.
Example: 4501-102
DELEVAN
.47uH±20%

DASH NUMBER*	0 AMPS DC INDUCTANCE ±20% (µH @ 10 kHz)	DCR (OHMS) MAXIMUM	RATED DC CURRENT (Amps) MAXIMUM	INDUCTANCE (µH) MINIMUM @ Rated DC Current
SERIES 4501 FERROUS ALLOY CORE				
Parallel Connected Specifications				
-102M	0.47	0.005	6.50	0.30
-104M	0.68	0.006	5.50	0.40
-106M	1.00	0.008	5.00	0.60
-108M	2.00	0.010	4.50	1.20
-110M	5.00	0.020	3.00	3.00
-112M	8.00	0.025	2.70	4.80
-114M	10.0	0.030	2.50	6.00
-116M	15.0	0.060	1.70	9.50
-118M	20.0	0.080	1.50	12.0
-120M	25.0	0.090	1.40	15.0
-122M	33.0	0.105	1.40	20.0
-124M	50.0	0.200	0.95	30.0
-126M	68.0	0.300	0.80	40.0
-128M	100.0	0.400	0.65	60.0
-130M	150.0	0.550	0.60	90.0
-132M	200.0	0.750	0.45	120.0
-134M	300.0	1.100	0.40	180.0

*Complete part # must include series # PLUS the dash #

For surface finish information, refer to www.delevanfinishes.com

LAND PATTERN DIMENSIONS

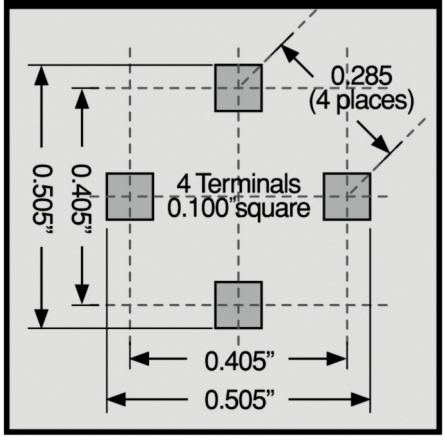

Series Connected Specifications

Inductance Four (4) times parallel inductance specifications.

DCR Four (4) times parallel DCR specifications.

Rated DC Current minimum One-half of parallel Rated DC Current specifications.

Packaging Tape & reel (24mm):
13" reel, 600 pieces max.; 7" reel not available

Weight (Grams) 1.0 (Ref.)

270 Quaker Rd., East Aurora NY 14052 • Phone 716-652-3600 • Fax 716-652-4814 • E-mail: apisales@delevan.com • www.delevan.com

API Delevan®

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.